

**norm****NEN-EN 50171**

Central safety power supply systems

Publicatie uitsluitend voor commentaar

juni 2013

ICS 91.140.50; 91.160.10

**Commentaar vóór 2013-09-25**

Zal vervangen NEN-EN 50171:2001; NEN-EN 50171:2001/C1:2001

Als Europees normontwerp is gepubliceerd: prEN 50171:2013, IDT

Definitief vastgestelde normen zullen als Nederlandse norm gelden. Daarom wordt dit normontwerp in Nederland voor commentaar gepubliceerd. Op het ontwerp ingebracht commentaar zal aan de bevoegde normcommissie worden voorgelegd die hiermee rekening zal houden bij de bepaling van de Nederlandse stem. Indien er geen bezwaar bij NEN wordt gebracht, kan dat leiden tot ongewijzigde definitieve vaststelling van het ontwerp als norm.

Van Europese normen bestaan drie officiële versies: Engels, Frans en Duits. Voor Nederland zal de Engelse versie gelden. Daarnaast kan er gekozen worden voor een andere geautoriseerde versie in het Nederlands.

Nederlands Elektrotechnisch Comité  
Normcommissie 364022 "Vermogenselektronica (NEG-22)"

**THIS PUBLICATION IS COPYRIGHT PROTECTED****DEZE PUBLICATIE IS AUTEURSRECHTELIJK BESCHERMD**

Apart from exceptions provided by the law, nothing from this publication may be duplicated and/or published by means of photocopy, microfilm, storage in computer files or otherwise, which also applies to full or partial processing, without the written consent of the Netherlands Standardization Institute.

The Netherlands Standardization Institute shall, with the exclusion of any other beneficiary, collect payments owed by third parties for duplication and/or act in and out of law, where this authority is not transferred or falls by right to the Reproduction Rights Foundation.

Auteursrecht voorbehouden. Behoudens uitzondering door de wet gesteld mag zonder schriftelijke toestemming van het Nederlands Normalisatie-instituut niets uit deze uitgave worden veeleenvoudigd en/of openbaar gemaakt door middel van fotokopie, microfilm, opslag in computerbestanden of anderszins, hetgeen ook van toepassing is op gehele of gedeeltelijke bewerking.

Het Nederlands Normalisatie-instituut is met uitsluiting van ieder ander gerechtigd de door derden verschuldigde vergoedingen voor veeleenvoudiging te innen en/of daartoe in en buiten rechte op te treden, voor zover deze bevoegdheid niet is overgedragen c.q. rechtens toekomt aan de Stichting Reprorecht.

Although the utmost care has been taken with this publication, errors and omissions cannot be entirely excluded. The Netherlands Standardization Institute and/or the members of the committees therefore accept no liability, not even for direct or indirect damage, occurring due to or in relation with the application of publications issued by the Netherlands Standardization Institute.

Hoewel bij deze uitgave de uiterste zorg is nagestreefd, kunnen fouten en onvolledigheden niet geheel worden uitgesloten. Het Nederlands Normalisatie-instituut en/of de leden van de commissies aanvaarden derhalve geen enkele aansprakelijkheid, ook niet voor directe of indirecte schade, ontstaan door of verband houdend met toepassing van door het Nederlands Normalisatie-instituut gepubliceerde uitgaven.

Voorbeeld  
Preview

English version

**Central safety power supply systems**

Systèmes d'alimentation à source centrale

Zentrale  
Sicherheitsstromversorgungssysteme

This draft European Standard is submitted to CENELEC members for CENELEC enquiry.  
Deadline for CENELEC: 2013-10-25.

It has been drawn up by CLC/TC 22X.

If this draft becomes a European Standard, CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CENELEC in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.

**CENELEC**

European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

**Management Centre: Avenue Marnix 17, B - 1000 Brussels**

**Contents**

1

2 Foreword.....4

3 1 Scope .....5

4 2 Normative references .....5

5 3 Terms and definitions .....6

6 4 Types of central safety power supply systems.....8

7 4.1 General provisions .....8

8 4.2 Changeover mode.....8

9 4.3 Parallel standby mode.....8

10 4.4 Changeover mode with an additional control switching device for central switching of the

11 load.....9

12 4.5 Changeover mode with additional control switching device for partial switching of the load.....9

13 4.6 Non-maintained changeover mode .....10

14 5 Operating conditions and requirements .....10

15 5.1 Normal operating conditions and requirements for central safety power supply systems .....10

16 5.2 Requirements to be specified by the user .....10

17 6 Constructional design.....11

18 6.1 Structure of enclosures .....11

19 6.2 Battery chargers and rectifiers .....11

20 6.3 Transformers .....12

21 6.4 Switchgear and controlgear.....12

22 6.5 Central inverters/group inverters/converters.....12

23 6.6 Deep discharge protection.....14

24 6.7 Monitoring and display equipment .....14

25 6.8 Fuses, protective devices and measuring instruments .....15

26 6.9 Internal wiring .....15

27 6.10 Electric strength.....16

28 6.11 Recurring tests .....16

29 6.12 Batteries .....17

30 6.13 Battery installation and provisions for maintenance .....18

31 6.14 Equipment marking .....18

32 6.15 Warning labels.....20

33 7 Information for installation and operation of central safety power supply systems.....20

34 7.1 Documentation .....20

35 7.2 Initial type test.....20

36 7.3 Recurring tests .....21

37 8 Tests.....21

38 8.1 General.....21


39 8.2 Tests required before commissioning .....21

40 8.3 Recurring tests .....23

41 Annex A (informative) System testing .....24

42 **Figures**

43 Figure 1.....8  
44 Figure 2.....9  
45 Figure 3.....9  
46 Figure 4.....9  
47 Figure 5.....10  
48

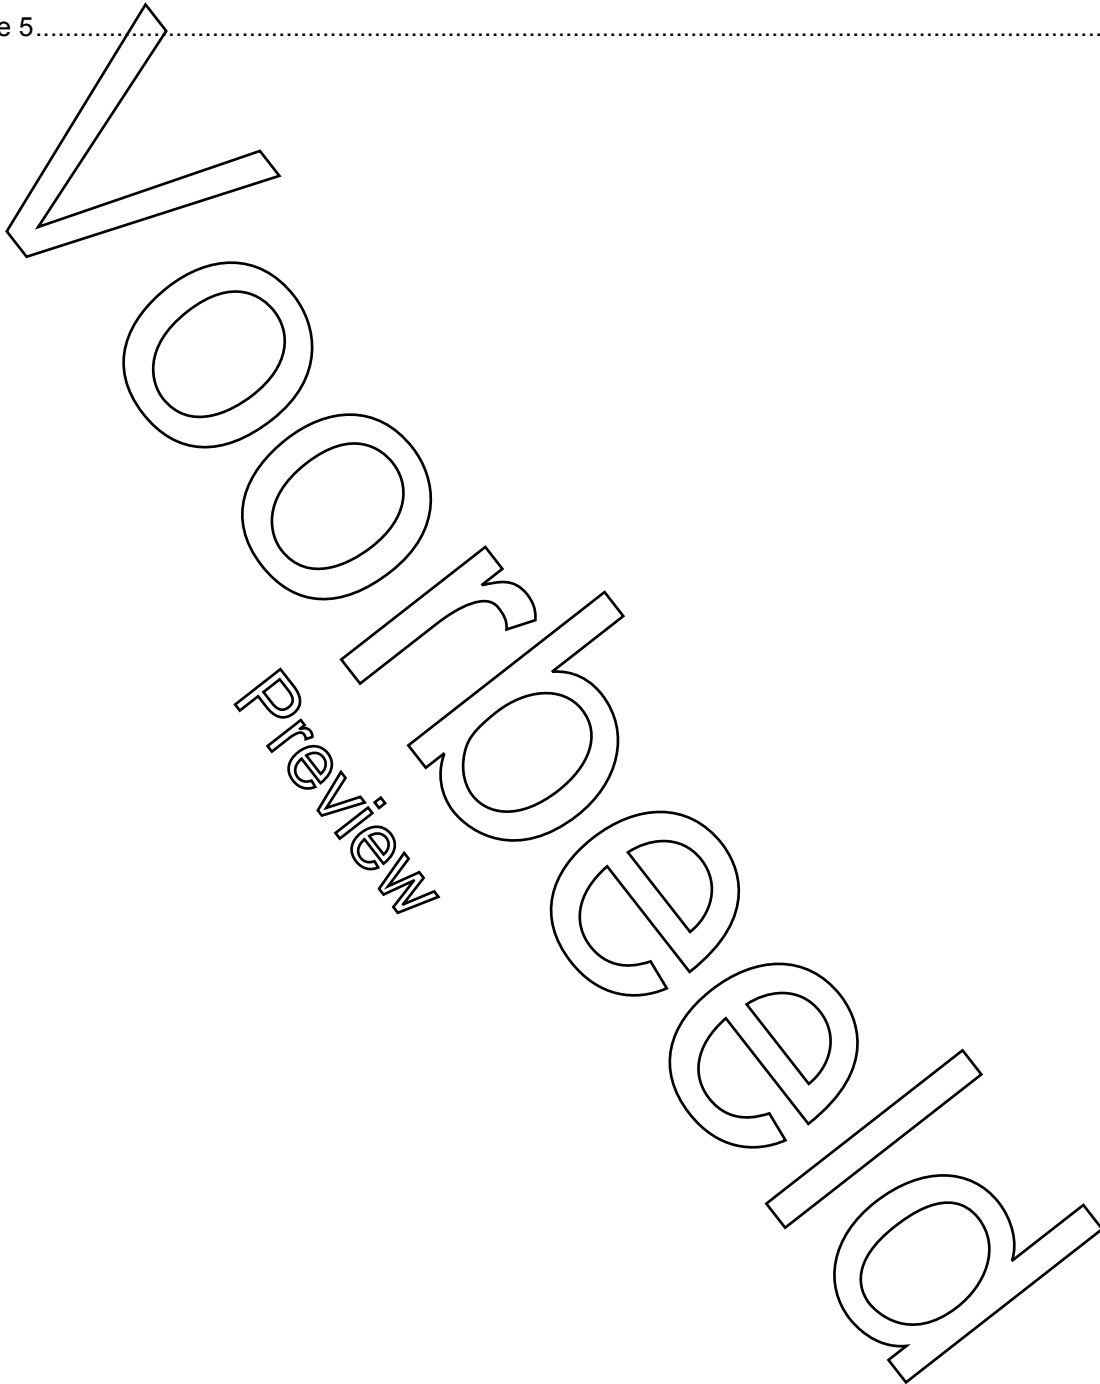

49

## Foreword

50 This document (prEN 50171:2013) has been prepared by CLC/TC 22X "Power electronics".

51 This document is currently submitted to the Enquiry.

52 This document will supersede EN 50171:2001 + corrigendum August 2001.

53 This standard covers the Principle Elements of the Safety Objectives for Electrical Equipment Designed for  
54 Use within Certain Voltage Limits (LVD - 2006/95/EC).

For  
Preview  
prEN

## 55 1 Scope

56 This European Standard specifies the general requirements for central power supply systems for an  
57 independent energy supply to essential safety equipment. This standard covers systems that are  
58 permanently connected to AC supply voltages not exceeding 1 000 V and use batteries as an alternative  
59 power source.

60 Central safety power supply systems are intended to ensure energy supply to emergency escape lighting in  
61 the event of normal supply failure and may be suitable for energising other essential safety equipment, for  
62 example:

- 63 – electric circuits of automatic fire extinguishing installations;
- 64 – paging systems and signalling safety installations;
- 65 – smoke extraction equipment;
- 66 – carbon monoxide warning systems;
- 67 – special safety installations related to specific buildings, e.g. high-risk areas.

68 Combination of the aforementioned equipment types should not be mixed together on the same central  
69 safety power supply system.

70 Schematic representations of typical central safety power supply equipment are depicted in Clause 4.

71 Power supply systems for fire alarm equipment that are covered by EN 54 are excluded.

## 72 2 Normative references

73 The following documents in whole or in part, are normatively referenced in this document and are  
74 indispensable for its application. For dated references, only the edition cited applies. For undated references,  
75 the latest edition of the referenced document (including any amendments) applies.

76 EN 1838, *Lighting applications – Emergency lighting*

77 EN 50272-2:2001, *Safety requirements for secondary batteries and battery installations – Part 2: Stationary  
78 batteries*

79 EN 50274, *Low-voltage switchgear and controlgear assemblies – Protection against electric shock –  
80 Protection against unintentional direct contact with hazardous live parts*

81 EN 60051 (series), *Direct acting indicating analogue electrical measuring instruments and their accessories*

82 EN 60146-1-1, *Semiconductor converters – General requirements and line commutated converters –  
83 Part 1-1: Specification of basic requirements*

84 EN 61951-1, *Secondary cells and batteries containing alkaline or other non-acid electrolytes - Portable  
85 sealed rechargeable single cells – Part 1: Nickel-cadmium*

86 EN 60417 (series), *Graphical symbols for use on equipment*

87 EN 60598-1, *Luminaires – Part 1: General requirements and tests (IEC 60598-1, modified)*

88 EN 60622, *Sealed nickel-cadmium prismatic rechargeable single cells*

89 EN 60623, *Vented nickel-cadmium prismatic rechargeable single cells*

90 EN 60721-3-3, *Classification of environmental conditions – Part 3: Classification of groups of environmental  
91 parameters and their severities – Section 3: Stationary use at weatherprotected locations*

92 EN 60896-11, *Stationary lead-acid batteries – Part 11: Vented types – General requirements and methods of  
93 test*

94 EN 60896-21, *Stationary lead-acid batteries – Part 21: Valve regulated types – Methods of test*

- 95 EN 60896-22, *Stationary lead-acid batteries – Part 22: Valve regulated types – Requirements*
- 96 EN 60947-2, *Low-voltage switchgear and controlgear – Part 2: Circuit-breakers*
- 97 EN 60947-4-1, *Low-voltage switchgear and controlgear – Part 4-1: Contactors and motor-starters – Electro-*  
98 *mechanical contactors and motor-starters*
- 99 EN 61000-6-2, *Electromagnetic compatibility (EMC) – Part 6-2: Generic standards – Immunity for industrial*  
100 *environments*
- 101 EN 61000-6-3, *Electromagnetic compatibility (EMC) – Part 6-3: Generic standards – Emission standard for*  
102 *residential, commercial and light-industrial environments*
- 103 EN 61032:1998, *Protection of persons and equipment by enclosures – Probes for verification*
- 104 EN 61558-2-4, *Safety of transformers, reactors, power supply units and similar products for supply voltages*  
105 *up to 1/100 V – Part 2-4: Particular requirements and tests for isolating transformers and power supply units*  
106 *incorporating safety isolating transformers*
- 107 EN 62040-1, *Uninterruptible power systems (UPS) - Part 1: General and safety requirements for UPS*
- 108 EN 62079, *Preparation of instructions – Structuring, content and presentation*
- 109 EN 50525-2-31, *Electric cables - Low voltage energy cables of rated voltages up to and including 450/750 V*  
110 *(U0/U) - Part 2-31: Cables for general applications - Single core non-sheathed cables with thermoplastic*  
111 *PVC insulation*
- 112 EN 60038, *CENELEC standard voltages*
- 113 HD 60364-6:2007, *Erection of low-voltage installations – Part 6: Verification*

### 114 **3 Terms and definitions**

115 For the purposes of this document, the following terms and definitions apply.

#### 116 **3.1**

#### 117 **automatic transfer switching device (ATSD)**

118 device arranged to connect the emergency supply automatically to the essential safety equipment circuit(s)  
119 on failure of the normal supply or to transfer the load from the normal supply to the battery

#### 120 **3.2**

#### 121 **battery charger**

122 part of the equipment that provides the charge to the battery from the normal supply

#### 123 **3.3**

#### 124 **Inverter**

125 device for the conversion of direct current (DC) to alternating current (AC)

#### 126 **3.4**

#### 127 **changeover mode**

128 mode in which the emergency power supply source is kept on standby and will, in the event of a failure of the  
129 normal supply, automatically be transferred to the essential safety equipment

#### 130 **3.5**

#### 131 **converter**

132 device for changing the voltage of a direct current supply

#### 133 **3.6**

#### 134 **mode without interruption**

135 mode in which the emergency power supply source operates in parallel to the normal supply, is connected to  
136 the load and supplies power without interruption when the normal supply fails



- 137 **3.7**  
138 **control switch device (CSD)**  
139 device intended to automatically supply one or several circuits from the emergency power source on failure  
140 of the normal supply. This device may be manually controlled as required by the application standard
- 141 **3.8**  
142 **deep discharge protection device**  
143 device to protect the battery against deep discharge
- 144 **3.9**  
145 **rated supply voltage (mains input)**  
146 supply voltage or supply voltages assigned to the equipment by the manufacturer for the specified operating  
147 conditions of the equipment
- 148 **3.10**  
149 **rated output current (of a system)**  
150 current, in amperes, supplied by a system at nominal voltage
- 151 **3.11**  
152 **normal supply**  
153 source of electrical energy that is intended to provide normal power supply
- 154 **3.12**  
155 **rated operating time**  
156 design period of time during which the load can be supplied whilst the system stays within specified voltage  
157 limits
- 158 **3.13**  
159 **nominal battery voltage**  
160 suitable approximate voltage value of a system calculated using 2 V per cell for lead acid cells and 1,2 V per  
161 cell for nickel cadmium cells
- 162 **3.14**  
163 **nominal system voltage**  
164 specified output voltage of a central safety power supply system
- 165 **3.15**  
166 **minimum voltage**  
167 voltage of the central safety power supply system at the end of the rated operating time
- 168 **3.16**  
169 **earth fault indication**  
170 device to indicate earth faults from either pole of the battery or from a load circuit if connected to the battery
- 171 **3.17**  
172 **mains failure indication**  
173 device to indicate failure of the normal supply
- 174 **3.18**  
175 **central safety power supply system (CPS system)**  
176 central power supply system which supplies the required power to essential safety equipment without any  
177 restriction in power output
- 178 **3.19**  
179 **low power safety supply system (LPS system)**  
180 central power supply system where the power output is limited to 500 W for a duration of 3 h or to 1 500 W  
181 for a duration of 1 h
- 182 **3.20**  
183 **essential safety equipment**  
184 devices required by the relevant authority to protect people in the event of a hazard

# Bestelformulier

# NEN

## Stuur naar:

NEN Standards Products & Services  
t.a.v. afdeling Klantenservice  
Antwoordnummer 10214  
2600 WB Delft

## NEN Standards Products & Services

Postbus 5059  
2600 GB Delft

Vlinderweg 6  
2623 AX Delft

T (015) 2 690 390  
F (015) 2 690 271

[www.nen.nl/normshop](http://www.nen.nl/normshop)

## Ja, ik bestel

\_\_ ex. NEN-EN 50171:2013 Ontw. en Noodverlichtingssystemen - Centrale voedingssystemen € 29.64

**Wilt u deze norm in PDF-formaat? Deze bestelt u eenvoudig via [www.nen.nl/normshop](http://www.nen.nl/normshop)**

### Gratis e-mailnieuwsbrieven

Wilt u op de hoogte blijven van de laatste ontwikkelingen op het gebied van normen, normalisatie en regelgeving? Neem dan een gratis abonnement op een van onze e-mailnieuwsbrieven. [www.nen.nl/nieuwsbrieven](http://www.nen.nl/nieuwsbrieven)

### Retourneren

Fax: (015) 2 690 271  
E-mail: [klantenservice@nen.nl](mailto:klantenservice@nen.nl)  
Post: NEN Standards Products & Services,  
t.a.v. afdeling Klantenservice  
Antwoordnummer 10214,  
2600 WB Delft  
(geen postzegel nodig).

## Gegevens

Bedrijf / Instelling

T.a.v.  O M O V

E-mail

Klantnummer NEN

Uw ordernummer  BTW nummer

Postbus / Adres

Postcode  Plaats

Telefoon  Fax

**Factuuradres** (indien dit afwijkt van bovenstaand adres)

Postbus / Adres

Postcode  Plaats

Datum  Handtekening

### Voorwaarden

- De prijzen zijn geldig tot 31 december 2016, tenzij anders aangegeven.
- Alle prijzen zijn excl. btw, verzend- en handelingskosten en onder voorbehoud bij o.m. ISO- en IEC-normen.
- Bestelt u via de normshop een pdf, dan betaalt u geen handeling en verzendkosten.
- Meer informatie: telefoon (015) 2 690 391, dagelijks van 8.30 tot 17.00 uur.
- Wijzigingen en typfouten in teksten en prijsinformatie voorbehouden.
- U kunt onze algemene voorwaarden terugvinden op: [www.nen.nl/leveringsvoorwaarden](http://www.nen.nl/leveringsvoorwaarden).