

Dit document mag slechts op een stand-alone PC worden geïnstalleerd. Gebruik op een netwerk is alleen toestaan als een aanvullende licentieovereenkomst voor netwerkgebruik met NEN is afgesloten.
This document may only be used on a stand-alone PC. Use in a network is only permitted when a supplementary license agreement for us in a network with NEN has been concluded.

V
O
O
R
B
E
S
L
U
T
I
N
G
P
R
E
V
I
E
W

Nederlandse norm

NEN-ISO 15031-5

(en)

Road vehicles - Communication between vehicle and external equipment for emissions-related diagnostics - Part 5: Emissions-related diagnostic services (ISO 15031-5:2006, IDT)

ICS 13.040.50; 43.040.10

februari 2006

Als Nederlandse norm is aanvaard:

- ISO 15031-5:2006, IDT

VOORBEELD
Preview

Normcommissie 345 042 "Wegvoertuigen"

Apart from exceptions provided by the law, nothing from this publication may be duplicated and/or published by means of photocopy, microfilm, storage in computer files or otherwise, which also applies to full or partial processing, without the written consent of the Netherlands Standardization Institute.

The Netherlands Standardization Institute shall, with the exclusion of any other beneficiary, collect payments owed by third parties for duplication and/or act in and out of law, where this authority is not transferred or falls by right to the Reproduction Rights Foundation.

Auteursrecht voorbehouden. Behoudens uitzondering door de wet gesteld mag zonder schriftelijke toestemming van het Nederlands Normalisatie-instituut niets uit deze uitgave worden veeleelvoudigd en/of openbaar gemaakt door middel van fotokopie, microfilm, opslag in computerbestanden of anderszins, hetgeen ook van toepassing is op gehele of gedeeltelijke bewerking.

Het Nederlands Normalisatie-instituut is met uitsluiting van ieder ander gerechtigd de door derden verschuldigde vergoedingen voor veeleelvoudiging te innen en/of daartoe in en buiten rechte op te treden, voor zover deze bevoegdheid niet is overgedragen c.q. rechtens toekomt aan de Stichting Reprerecht.

Although the utmost care has been taken with this publication, errors and omissions cannot be entirely excluded. The Netherlands Standardization Institute and/or the members of the committees therefore accept no liability, not even for direct or indirect damage, occurring due to or in relation with the application of publications issued by the Netherlands Standardization Institute.

Hoewel bij deze uitgave de uiterste zorg is nagestreefd, kunnen fouten en onvolledigheden niet geheel worden uitgesloten. Het Nederlands Normalisatie-instituut en/of de leden van de commissies aanvaarden derhalve geen enkele aansprakelijkheid, ook niet voor directe of indirecte schade, ontstaan door of verband houdend met toepassing van door het Nederlands Normalisatie-instituut gepubliceerde uitgaven.

Preview

ROADMAP

**Road vehicles — Communication
between vehicle and external equipment
for emissions-related diagnostics —**

**Part 5:
Emissions-related diagnostic services**

*Véhicules routiers — Communications entre un véhicule et un
équipement externe pour le diagnostic relatif aux émissions —*

Partie 5: Services de diagnostic relatif aux émissions



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

Copyright
Preview

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	2
4 Symbols and abbreviated terms.....	4
5 Technical requirements.....	4
5.1 General requirements.....	4
5.2 Diagnostic service requirements.....	4
5.3 Diagnostic message format.....	25
5.4 Allowance for expansion and enhanced diagnostic services.....	29
5.5 Definition of PIDs for Services \$01 and \$02.....	29
5.6 Format of data to be displayed.....	29
6 Diagnostic service definition for ISO 9141-2, ISO 14230-4, and SAE J1850.....	31
6.1 Service \$01 — Request current powertrain diagnostic data.....	31
6.2 Service \$02 — Request powertrain freeze frame data.....	35
6.3 Service \$03 — Request emission-related diagnostic trouble codes.....	39
6.4 Service \$04 — Clear/reset emission-related diagnostic information.....	44
6.5 Service \$05 — Request oxygen sensor monitoring test results.....	46
6.6 Service \$06 — Request on-board monitoring test results for specific monitored systems.....	51
6.7 Service \$07 — Request emission-related diagnostic trouble codes detected during current or last completed driving cycle.....	56
6.8 Service \$08 — Request control of on-board system, test or component.....	57
6.9 Service \$09 — Request vehicle information.....	60
7 Diagnostic service definition for ISO 15765-4.....	73
7.1 Service \$01 — Request current powertrain diagnostic data.....	73
7.2 Service \$02 — Request powertrain freeze frame data.....	79
7.3 Service \$03 — Request emission-related diagnostic trouble codes.....	84
7.4 Service \$04 — Clear/reset emission-related diagnostic information.....	87
7.5 Service \$05 — Request oxygen sensor monitoring test results.....	88
7.6 Service \$06 — Request on-board monitoring test results for specific monitored systems.....	89
7.7 Service \$07 — Request emission-related diagnostic trouble codes detected during current or last completed driving cycle.....	99
7.8 Service \$08 — Request control of on-board system, test or component.....	100
7.9 Service \$09 — Request vehicle information.....	104
Annex A (normative) PID (Parameter ID)/OBDMID (On-Board Monitor ID)/TID (Test ID)/INFOTYPE supported definition.....	114
Annex B (normative) PIDs (Parameter ID) for Services \$01 and \$02 scaling and definition.....	115
Annex C (normative) TIDs (Test ID) scaling description.....	148
Annex D (normative) OBDMIDs (On-Board Diagnostic Monitor ID) definition for Service \$06.....	149
Annex E (normative) Unit and Scaling definition for Service \$06.....	154
Annex F (normative) TIDs (Test ID) for Service \$08 scaling and definition.....	177
Annex G (normative) INFOTYPES for Service \$09 scaling and definition.....	178
Bibliography.....	185

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 15031-5 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronical equipment*.

ISO 15031 consists of the following parts, under the general title *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics*:

- *Part 1: General information*
- *Part 2: Terms, definitions, abbreviations and acronyms*
- *Part 3: Diagnostic connector and related electrical circuits, specification and use*
- *Part 4: External test equipment*
- *Part 5: Emissions-related diagnostic services*
- *Part 6: Diagnostic trouble code definitions*
- *Part 7: Data link security*

Introduction

ISO 15031 consists of a number of parts which, taken together, provide a coherent self-consistent set of specifications to facilitate emissions-related diagnostics. Parts 2 through 7 are based on SAE recommended practices. This part is based on SAE J1979 SEP97 (E/E Diagnostic Test Modes).

ISO 15031-1 provides an introduction to the series of International Standards.

This part of ISO 15031 is based on the Open Systems Interconnection (OSI) Basic Reference Model in accordance with ISO/IEC 7498 and ISO/IEC 10731, which structures communication systems into seven layers as shown in the table below.

Table 1 — Applicability and relationship between documents

Applicability	OSI 7 layer	Emissions-related diagnostics			
Seven layer according to ISO/IEC 7498 and ISO/IEC 10731	Physical (layer 1)	ISO 9141-2	ISO 14230-1	SAE J1850	ISO 11898, ISO 15765-4
	Data link (layer 2)	ISO 9141-2	ISO 14230-2	SAE J1850	ISO 11898, ISO 15765-4
	Network (layer 3)	—	—	—	ISO 15765-2, ISO 15765-4
	Transport (layer 4)	—	—	—	—
	Session (layer 5)	—	—	—	ISO 15765-4
	Presentation (layer 6)	—	—	—	—
	Application (layer 7)	ISO 15031-5	ISO 15031-5	ISO 15031-5	ISO 15031-5

Voorbeeld
Preview

Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics —

Part 5: Emissions-related diagnostic services

1 Scope

This part of ISO 15031 specifies diagnostic services and functionally addressed request/response messages required to be supported by motor vehicles and external test equipment for diagnostic purposes which pertain to motor vehicle emission-related data. Any external test equipment meeting the requirements of ISO 15031-4 use these messages to retrieve emissions-related information from the vehicle.

Each section of this part of ISO 15031, which specifies additional detail to existing sections of ISO 9141-2, ISO 14230-4, SAE J1850, and ISO 15765-4 supersede those specifications.

NOTE This part of ISO 15031 provides the mechanism to satisfy the requirements included in the country-specific regulations and not all capabilities included in this document are required by the country-specific regulations. This part of ISO 15031 also is not considered a final authority for interpretation of the regulations, so readers should determine the applicability of capabilities defined in this document for their specific needs.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 9141-2, *Road vehicles — Diagnostic systems — Part 2: CARB requirements for interchange of digital information*

ISO 9141-2/Amendment 1, *Road vehicles — Diagnostic systems — Part 2: CARB requirements for interchange of digital information*

ISO 14230-4, *Road vehicles — Diagnostic systems — Keyword Protocol 2000 — Part 4: Requirements for emission-related systems*

ISO 15031-1, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 1: General information*

ISO/TS 15031-2, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 2: Terms, definitions, abbreviations and acronyms*

ISO 15031-3, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 3: Diagnostic connector and related electrical circuits, specification and use*

ISO 15031-4, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 4: External test equipment*

ISO 15031-5:2006(E)

ISO 15031-6, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 6: Diagnostic trouble code definitions*

ISO 15765-2, *Road vehicles — Diagnostics on Controller Area Networks (CAN) — Part 2: Network layer services*

ISO 15765-4, *Road vehicles — Diagnostics on Controller Area Networks (CAN) — Part 4: Requirements for emissions-related systems*

SAE J1850: *MAY 2001, Class B Data Communications Network Interface*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 15031-2 and the following apply.

3.1

absolute throttle position sensor

value intended to represent the throttle opening

NOTE For systems where the output is proportional to the input voltage, this value is the percent of maximum input signal. For systems where the output is inversely proportional to the input voltage, this value is 100 % minus the percent of maximum input signal. Throttle position at idle usually indicates greater than 0 %, and throttle position at wide open throttle usually indicates less than 100 %.

3.2

bank

specific group of cylinders sharing a common control sensor, bank 1 always containing cylinder number 1, bank 2 the opposite bank

NOTE If there is only one bank, bank #1 DTCs is used, and the word bank may be omitted. With a single "bank" system utilising multiple sensors, bank # DTCs is used identifying the sensors as #1, #2, #3 in order as they move further away from the cylinder(s).

3.3

base fuel schedule

the fuel calibration schedule programmed into the Powertrain Control Module or PROM when manufactured or when updated by some off-board source, prior to any learned on-board correction

3.4

Calculated Load Value

for spark ignition engines, typically an indication of the current airflow divided by peak airflow at wide open throttle as a function of rpm, where airflow is corrected for altitude and ambient temperature

NOTE 1 This definition provides a unit-less number, and provides the service technician with an indication of the percent engine capacity that is being used.

NOTE 2 For diesel applications, the calculated load value shall be determined by substituting fuel flow in place of airflow in the calculation.

3.5

client

function that is part of the tester and that makes use of the diagnostic services

NOTE A tester normally makes use of other functions such as data base management, specific interpretation, man-machine interface.

3.6

continuous monitoring

sampling at a rate no less than two samples per second

3.7 convention

Cvt

column integrated in each message table which marks each parameter included

NOTE The following conventions are used: C = Conditional: the parameter marked "C" in a request/response message is present only under a condition specified in the bottom row of the message table. M = Mandatory: the parameter marked "M" in a request/response message table is always present. U = User optional: the parameter marked "U" in a request/response message table is or is not supplied, depending on dynamic usage by the manufacturer. The convention recommends a mnemonic, which might be used for implementation. In no case is the specified mnemonic a mandatory requirement for any implementation.

3.8 Electronic Control Unit

ECU

generic term for any electronic control unit

3.9 Fuel Trim

FT

feedback adjustments to the base fuel schedule

NOTE Short-term fuel trim refers to dynamic or instantaneous adjustments. Long-term fuel trim refers to much more gradual adjustments to the fuel calibration schedule than short-term trim adjustments. These long-term adjustments compensate for vehicle differences and gradual changes that occur over time.

3.10 negative numbers

signed binary, the most significant bit (MSB) of the binary number used to indicate positive (0) / negative (1)

NOTE 1 2s complement: Negative numbers are represented by complementing the binary number and then adding 1.

EXAMPLE $-0,99 = 8001 \text{ hex} = 1000\ 0000\ 0000\ 0001 \text{ binary}$
 $0 = 0000 \text{ hex} = 0000\ 0000\ 0000\ 0000 \text{ binary}$
 $+0,99 = 7FFF \text{ hex} = 0111\ 1111\ 1111\ 1111 \text{ binary}$

NOTE 2 $(-0,99) + (+0,99) = 0.$

3.11 number

expressed by this symbol "#"

3.12 P2, P3 timing parameter

application timing parameters for the ECU(s) and the external test equipment

3.13 server

function that is part of an electronic control unit that provides the diagnostic services

NOTE This part of ISO 15031 differentiates between the server (i.e. the function) and the electronic control unit so that this document remains independent from the implementation.

3.14 service

information exchange initiated by a client (external test equipment) in order to require diagnostic information from a server (ECU) and/or to modify its behaviour for diagnostic purpose

NOTE This is also the equivalent of test mode or mode.

4 Symbols and abbreviated terms

CVN	Calibration Verification Number
ECM	Engine Control Module
ISR	Interrupt Service Routine
LSB	Least Significant Bit
MSB	Most Significant Bit
NRC	Negative Response Code
PCM	Powertrain Control Module
SI	International System of Units
TCM	Transmission Control Module

5 Technical requirements

5.1 General requirements

The requirements specified in this clause are necessary to ensure proper operation of both the external test equipment and the vehicle during diagnostic procedures. External test equipment, when using messages specified, shall not affect normal operation of the emission control system.

5.2 Diagnostic service requirements

5.2.1 Multiple responses to a single data request

The request messages are functional messages, which means the external test equipment will request data without knowledge of which ECU(s) on the vehicle will respond. In some vehicles, multiple ECUs may respond with the information requested. Any external test equipment requesting information shall therefore have provisions for receiving multiple responses.

IMPORTANT — All emissions-related OBD ECUs which at least support one of the services defined in this part of ISO 15031 shall support service \$01 and PID \$00. Service \$01 with PID \$00 is defined as the universal “initialization/keep alive/ping” message for all emissions-related OBD ECUs.

5.2.2 Application timing parameter definition

5.2.2.1 Overview

The definition of P2 and P3 is included in this clause. A subscript is added to each timing parameter to identify the protocol:

- P2_{K-line}, P3_{K-line}: P2, P3 for ISO 9141-2 and ISO 14230-4 protocols
- P2_{J1850}: P2 for SAE J1850 protocol
- P2_{CAN}: P2 for ISO 15765-4 protocol

IMPORTANT — It is the vehicle manufacturer’s responsibility to specify a shorter P2 timing window than specified in this part of ISO 15031 for each emission-related server/ECU in the vehicle to make sure that network topology delays of the vehicle architecture are considered.

5.2.2.2 Definition for ISO 9141-2

For ISO 9141-2 interfaces, Data Link Layer response time requirements (P1, P4) are specified in ISO 9141-2.

Table 2 specifies the application timing parameter values for P2 and P3.

Table 2 — Definition ISO 9141-2 application timing parameter values

Parameter	Minimum value (ms)	Maximum value (ms)	Description
P2 _{K-line} Key Bytes: \$08 \$08	25	50	Time between external test equipment request message and the successful transmission of the ECU(s) response message(s). Each OBD ECU shall start sending its response message within P2 _{K-line} after the request message has been correctly received. Subsequent response messages shall also be transmitted within P2 _{K-line} of the previous response message for multiple message responses.
P2 _{K-line} Key Bytes: \$94 \$94	0	50	Time between external test equipment request message and the successful transmission of the ECU response message(s). The OBD ECU shall start sending its response message within P2 _{K-line} after the request message has been correctly received. Subsequent response messages shall also be transmitted within P2 _{K-line} of the previous response message for multiple message responses.
P3 _{K-line}	55	5000	Time between the end of an ECU(s) successful transmission of response message(s) and start of new external test equipment request message. The external test equipment may send a new request message if all response messages related to the previously sent request message have been received and if P3 _{K-line} minimum time expired. ECU implementation guideline: TX (transmit) and RX (receive) line are connected. Each transmitted byte is read back by the receiver in the ECU. Upon the reception of a received byte, e.g. last byte of a request message (checksum) from the tester, the ECU shall reset the P3 timer value to zero. If the ECU supports the request message, it will start transmitting the response message within the P2 timing window. Each transmitted byte will cause the P3 timer value to be reset. If the ECU does not support the request and does not send a response message then in a single OBD ECU system the P3 is started with the last byte received of the request message. In a multiple OBD ECU system a response message by any one or more ECUs shall cause the P3 timer value to be reset in all ECUs including any ECU not supporting the request message.

5.2.2.3 Definition for ISO 14230-4

For ISO 14230-4 interfaces, Data Link Layer response time requirements are specified in ISO 14230-4.

Table 3 specifies the application timing parameter values for P2 and P3.

Table 3 — Definitions of ISO 14230-4 application timing parameter values

Parameter	Minimum value (ms)	Maximum value (ms)	Description
P2 _{K-line}	25	50	Time between external test equipment request message and the successful transmission of the ECU(s) response message(s). Each OBD ECU shall start sending its response message within P2 _{K-line} after the request message has been correctly received. Subsequent response messages shall also be transmitted within P2 _{K-line} of the previous response message for multiple message responses.
P3 _{K-line}	55	5000	Time between the end of an ECU(s) successful transmission of response message(s) and start of new external test equipment request message. The external test equipment may send a new request message if all response messages related to the previously sent request message have been received and if P3 _{K-line} minimum time expired. ECU implementation guideline: TX (transmit) and RX (receive) line are connected. Each transmitted byte is read back by the receiver in the ECU. Upon the reception of a received byte, e.g. last byte of a request message (checksum) from the tester, the ECU shall reset the P3 timer value to zero. If the ECU supports the request message, it will start transmitting the response message within the P2 timing window. Each transmitted byte will cause the P3 timer value to be reset. If the ECU does not support the request and does not send a response message, then in a single OBD ECU system the P3 is started with the last byte received of the request message. In a multiple OBD ECU system, a response message by any one or more ECUs shall cause the P3 timer value to be reset in all ECUs including any ECU not supporting the request message.

5.2.2.4 Implementation guidance example for ISO 9141-2 and ISO 14230-4 protocols

This subclause provides an implementation example for client/external test equipment and server/ECU. It is assumed that the client (external test equipment) communicates to a vehicle with two (2) emission-related OBD servers (ECUs). The client requests a CVN, which is only supported by server #1 (ECU #1) with two (2) response messages. Server #2 (ECU #2) is not flash programmable. Figure 1 graphically depicts the timing handling in the client and two (2) servers for a functionally addressed request message. A description follows the figure that references the points marked in Figure 1.

From a server point of view, there is no difference in the timing handling compared to a physically addressed request message. The server shall reset the P3_{K-line} timer value on each received byte regardless of whether the byte is part of a request message or a response message from any another server or an echo from its transmit line. There are several methods of how a server could implement the timing handling. The implementation of timing parameters is not part of this International Standard but an important system supplier responsibility. Some general server timing parameter implementation guidelines are described in this subclause. The server time stamps each receiver interrupt event and restarts/resets the P3_{K-line_server} timer or timing value, e.g. ISR time stamps received byte, and processing of the received information is performed outside the ISR. For simplification of the diagram, the Figure 1 only shows a P3_{K-line_server} restart after the reception of the first byte and last byte (checksum) of a received message. The P3_{K-line_server} restart is required on each received byte. The received message can be either a request message from the client or a response message from any other server connected and initialized by the 33 hex address. If the server has received a complete message, it compares the target address with the 33 hex address.

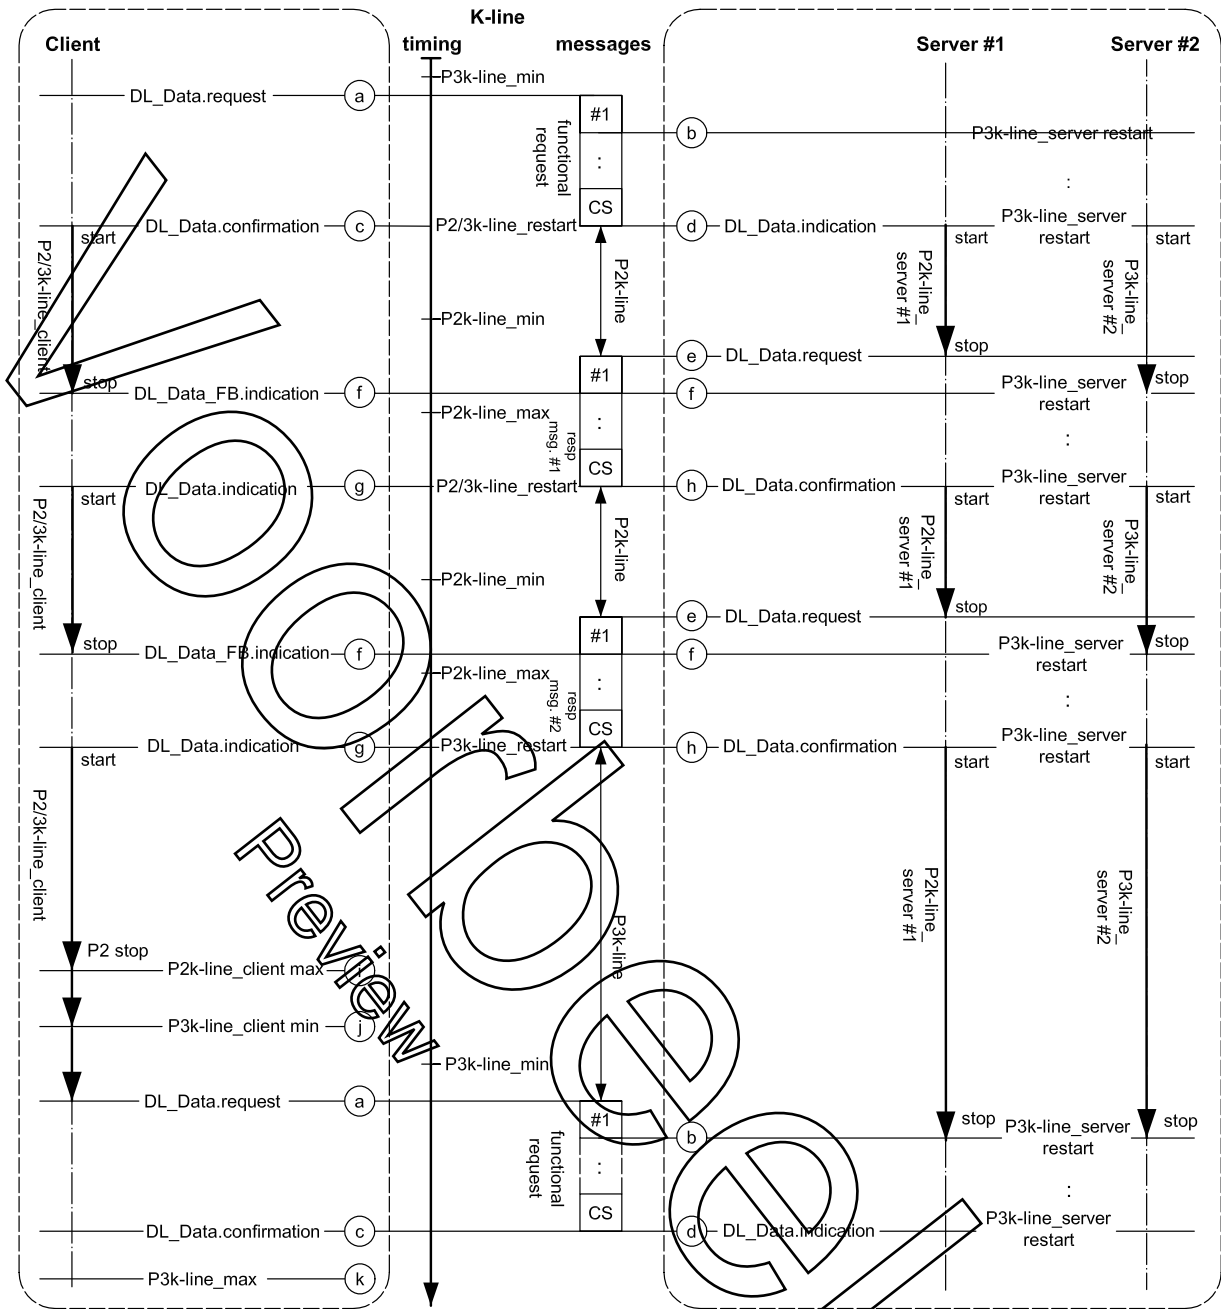


Figure 1 — ISO 9141-2 and ISO 14230-4 protocol client and server timing behaviour

Figure 1 shows the client and two (2) initialized servers connected via K-line (either ISO 9141-2 or ISO 14230-4 protocol). The relevant events for the client and both servers are marked and described.

- a) The diagnostic application of the client starts the transmission of a functionally addressed request message by issuing a DL_Data.request to its data link layer. The data link layer transmits the request message to the servers.
- b) Both servers and the client receive a byte of a message via a receive interrupt by the UART. The ISR (Interrupt Service Routine) either restarts the P2_{K-line}/P3_{K-line} timers or time stamps the received byte.

Bestelformulier

NEN

Stuur naar:

NEN Standards Products & Services
t.a.v. afdeling Klantenservice
Antwoordnummer 10214
2600 WB Delft

NEN Standards Products & Services

Postbus 5059
2600 GB Delft

Vlinderweg 6
2623 AX Delft

T (015) 2 690 390
F (015) 2 690 271

www.nen.nl/normshop

Ja, ik bestel

__ ex. NEN-ISO 15031-5:2006 en Wegvoertuigen - Communicatie tussen voertuig en uitwendige apparatuur voor emissieverwante diagnoses - Deel 5: Emissieverwante diagnostische diensten € 179.33

Wilt u deze norm in PDF-formaat? Deze bestelt u eenvoudig via www.nen.nl/normshop

Gratis e-mailnieuwsbrieven

Wilt u op de hoogte blijven van de laatste ontwikkelingen op het gebied van normen, normalisatie en regelgeving? Neem dan een gratis abonnement op een van onze e-mailnieuwsbrieven. www.nen.nl/nieuwsbrieven

Retourneren

Fax: (015) 2 690 271
E-mail: klantenservice@nen.nl
Post: NEN Standards Products & Services,
t.a.v. afdeling Klantenservice
Antwoordnummer 10214,
2600 WB Delft
(geen postzegel nodig).

Gegevens

Bedrijf / Instelling _____

T.a.v. _____ O M O V

E-mail _____

Klantnummer NEN _____

Uw ordernummer _____ BTW nummer _____

Postbus / Adres _____

Postcode _____ Plaats _____

Telefoon _____ Fax _____

Factuuradres (indien dit afwijkt van bovenstaand adres)

Postbus / Adres _____

Postcode _____ Plaats _____

Datum _____ Handtekening _____

Voorwaarden

- De prijzen zijn geldig tot 31 december 2016, tenzij anders aangegeven.
- Alle prijzen zijn excl. btw, verzend- en handelingskosten en onder voorbehoud bij o.m. ISO- en IEC-normen.
- Bestelt u via de normshop een pdf, dan betaalt u geen handeling en verzendkosten.
- Meer informatie: telefoon (015) 2 690 391, dagelijks van 8.30 tot 17.00 uur.
- Wijzigingen en typfouten in teksten en prijsinformatie voorbehouden.
- U kunt onze algemene voorwaarden terugvinden op: www.nen.nl/leveringsvoorwaarden.