
**Information technology — Control
network protocol —**

**Part 4:
IP communication**

*Technologies de l'information — Protocole de réseau de contrôle —
Partie 4: Communication IP*

Dit document mag slechts op een stand-alone PC worden geïnstalleerd. Gebruik op een netwerk is alleen toestaan als een aanvullende licentieovereenkomst voor netwerkgebruik met NEN is afgesloten. This document may only be used on a stand-alone PC. Use in a network is only permitted when a supplementary license agreement for us in a network with NEN has been concluded.

Preview

Reference number
ISO/IEC 14908-4:2012(E)



© ISO/IEC 2012

Copyrighted
Preview



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Voorbeeld
Preview

Contents

	Page
FOREWORD	4
Introduction	5
1 Scope	7
2 Normative references	8
3 Terms, definitions and abbreviations	8
3.1 Terms and definitions	8
3.2 Abbreviations	9
4 Requirements	9
5 CNP/IP device specification	10
5.1 IP Related device specifications	10
5.2 CNP related device specifications	10
6 IP channel	11
6.1 Specification	11
6.2 IP transport mechanisms	13
7 CNP/IP device	14
7.1 Configuration of a CNP/IP device	14
7.2 Configuration parameters	14
7.3 Configuration techniques	16
8 CNP/IP messages	17
8.1 Definition of CNP/IP messages and modes of operation	17
8.2 Common message header	18
8.3 Packet segmentation	19
8.4 Data packet exchange	22
8.5 Configuration server interactions	24
8.6 Miscellaneous Status Messages	32
8.7 Vendor Specific Messages	36
8.8 Authentication of CNP Packets	36
9 Packet formats	38
9.1 Packet Types	38
9.2 Common CNP/IP Header	39
9.3 Segment Packet	41
9.4 CNP Data Packets	42
9.5 CNP/IP Device Registration/configuration packets	42
9.6 Channel Membership Packet	46
9.7 Channel Routing Packet	47
9.8 Request Packet	49
9.9 Acknowledge Packet	50
9.10 Send List Packet	51
9.11 Node Status/Health/Statistics Response Message	52
Annex A (normative) Specifications for the CNP standard	55
Annex B (informative) Specifications for CNP	57

Figures

Figure 1 — Typical CNP/IP application	7
Figure 2 — IP protocol stack	13

Figure 3 — Packet bunching.....	19
Figure 4 — Authentication encoding and decoding of CNP packets	37

Tables

Table 1 — Device Registration with Configuration Server Protocol	28
Table 2 — Server to Device Unsolicited Configuration Message Protocol	29
Table 3 — Device to Server Channel Membership Request Protocol.....	29
Table 4 — Device to Server Send List Request Protocol.....	31
Table 5 — Device to Server Channel Routing Update Protocol.....	31
Table 6 — Device to Server Channel Routing Request Protocol	32
Table 7 — Protocol for Requesting a Device's Configuration.....	35
Table 8 — Protocol for Requesting a Device's Send List.....	35
Table 9 — Protocol for Requesting a Device's Channel Definition.....	35
Table 10 — Protocol for Requesting a Device's Channel Routing Information.....	36
Table 11 — Message type/cross reference.....	39
Table 12 — Common Packet Header format	39
Table 13 — Segment Packet format.....	41
Table 14 — Data Packet format.....	42
Table 15 — Device registration/configuration packet format.....	43
Table 16 — Channel Membership Packet format	46
Table 17 — Channel Routing Packet formats	47
Table 18 — Configuration Request Packet format.....	49
Table 19 — Request Reason codes	50
Table 20 — Request Amount codes	50
Table 21 — Request Action codes.....	50
Table 22 — Acknowledge Packet formats	51
Table 23 — Send List Packet format	52
Table 24 — Node Status/Health/Statistics Response Message.....	53

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

ISO/IEC 14908-4 was prepared by CEN/TC 247 and was adopted, under a special “fast-track procedure”, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by the national bodies of ISO and IEC.

ISO/IEC 14908 consists of the following parts, under the general title *Information technology — Control network protocol*:

- *Part 1: Protocol stack*
- *Part 2: Twisted pair communication*
- *Part 3: Power line channel specification*
- Part 4: IP communication*

Introduction

This International Standard has been prepared to provide mechanisms through which various vendors of local area control networks may exchange information in a standardised way. It defines communication capabilities.

This International Standard is used by all involved in design, manufacture, engineering, installation and commissioning activities.

The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draw attention to the fact that it is claimed that compliance with this International Standard may involve the use of patents held by Echelon Corporation

The ISO and IEC take no position concerning the evidence, validity and scope of this patent right. The holder of this putative patent right has assured the ISO and IEC that they are willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of the putative patent rights is registered with the ISO and IEC. Information may be obtained from:


Echelon Corporation, 4015 Meridian Avenue, San Jose, CA 94304, USA, phone +1-408-938-5234, fax: +1-408-790-3800 <http://www.echelon.com>.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Voorbeeld
Preview

INFORMATION TECHNOLOGY – CONTROL NETWORK PROTOCOL –

Part 4: IP communication



This International Standard specifies the transporting of the Control Network Protocol (CNP) packets for commercial local area control networks over Internet Protocol (IP) networks using a tunnelling mechanism wherein the CNP packets are encapsulated within IP packets. It applies to both CNP nodes and CNP routers.

The purpose of this International Standard is to insure interoperability between various CNP devices that wish to use IP networks to communicate using the CNP protocol.

The main body of this International Standard is independent of the CNP protocol being transported over the IP network. The reader is directed to Annex A and Annex B for the normative and informative, respectively, aspects of this specification that are specific to ISO/IEC 14908-1.

Figure 1 shows a possible configuration of such CNP devices and networks connected to an IP network.

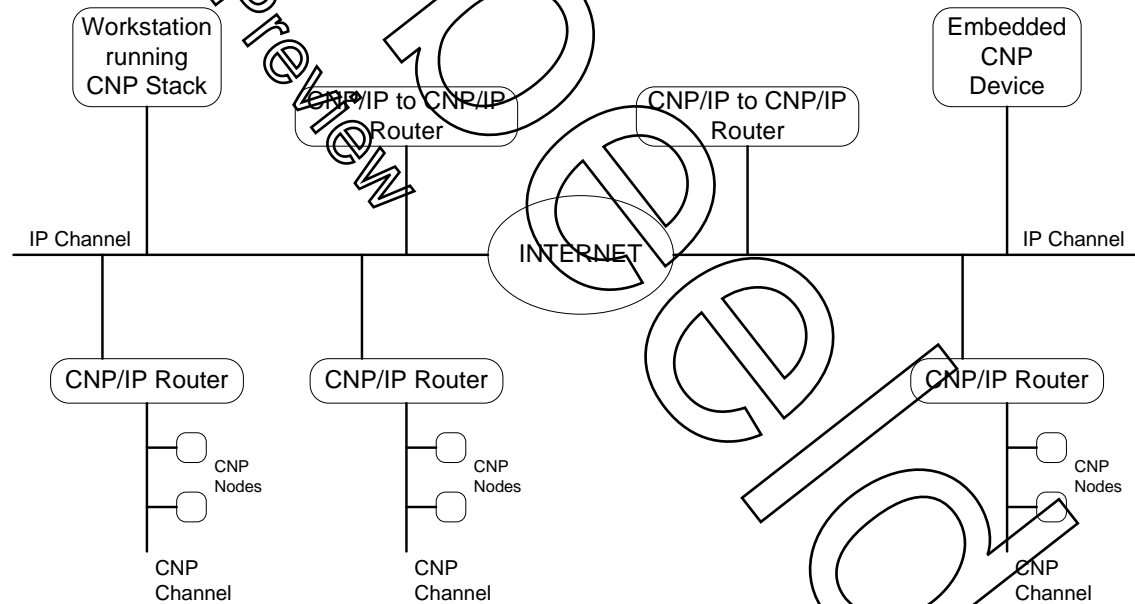


Figure 1 — Typical CNP/IP application

Figure 1 depicts two types of CNP devices: CNP nodes and CNP routers. It should be noted that the routers shown can route packets between typical CNP channels (such as twisted pair or power line) and an IP channel or it can route CNP packets between two IP channels. In this International Standard the IP channel will be defined in such a way to allow it to be used like any other CNP channel.

In the above diagram the IP network can be considered to be one or more IP channels. This International Standard covers only how CNP packets are transported over IP channels. It does not cover how CNP packets are routed between standard CNP channels and IP channels. This specification is not intended to cover the lower layers (physical, MAC and link layers) of either standard CNP or IP channels.

2 Normative references

None.

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1.1 tunneling

encapsulation of one protocol's packet within the payload of another protocol's packets

3.1.2 channel

common communications transport mechanism that a specific collection of CNP devices share and communicate over without the use of a router

NOTE 1 Channels are used to transport CNP packets below the link layer of the CNP protocol stack.

NOTE 2 Typically this refers to some type of physical media such as power line, RF, or twisted pair, but in the case of IP networks this channel is not physical, but a protocol tunnel.

3.1.3 CNP device

device that uses the CNP protocol to communicate with other CNP devices

NOTE Specifically a CNP/IP device is a CNP device that communicates with other CNP devices over an IP channel.

3.1.4 CNP router

special type of CNP device that routes CNP protocol packets between two or more channels

NOTE Specifically a CNP/IP router is a CNP router in which at least one of the channels it routes packets over is an IP channel.

3.1.5 CNP node

special type of CNP device that can send or receive CNP protocol packets, but does not route them between channels

NOTE 1 Specifically a CNP/IP node is a CNP node in which at least one of the channels it sends and receives packets over is an IP channel.

NOTE 2 All CNP devices are either routers, nodes or both.

3.1.6 CNP group

collection of CNP devices that share a common multicast address

3.1.7 node ID

logical network address that differentiates nodes within the same subnet or domain

3.1.8**Must Be Zero (MBZ)**

reserved field that may be used in the following versions of the protocol

NOTE Such fields shall be sent as zero and ignored by the receiver in implementations conforming to the current version of the specification.

3.2 Abbreviations

CTP	Channel Timeout Period
CNP	Control Network Protocol
LFS	Last Forwarded Sequence
MBZ	Must Be Zero
NTP	Network Time Protocol
PSN	Packet Sequence Number
SA/DA	Source Address / Destination Address
SID	Session Identifier
SNTP	Simple Network Time Protocol
UDP	User Datagram Protocol

4 Requirements

The following is a set of general requirements for the transporting of CNP packets over IP channels:

- be as efficient as possible to allow quasi real-time operation;
- be independent of the application level interface used to receive the packets. For example the tunnelling protocol should not rely on the existence of a socket interface or how that interface may be used;
- insure that CNP packet ordering is preserved;
- insure that CNP packets that are “stale” (outside the maximum timeout characteristics of the IP channel) are not forwarded;
- detect packets that get duplicated in the IP network;
- support IP routing devices that prioritise IP packets;
- optional security measures to prevent malicious users from tampering with devices;
- scalable;
- allow status information to be extracted from CNP/IP devices;
- support the exchange of configuration information between CNP/IP devices and configuration servers.

5 CNP/IP device specification

5.1 IP Related device specifications

A CNP/IP device shall behave like any standard IP host capable of exchanging IP packets with any other IP host either on the same IP subnet or anywhere else in the Internet cloud. A CNP/IP device shall have a single unicast IP address and may be capable belonging to as many as 32 multi-cast groups. It is optional that a CNP/IP device support multi-casting. This document does not address the routing of IP packets between subnets or through the Internet. The CNP/IP devices shall be compatible with whatever standard mechanisms (IP routers, switches etc.) are required to perform the IP routing functions.

5.2 CNP related device specifications

5.2.1 Packet formats

The general format of CNP packets which are tunnelled over the IP channel are those packets that are received from or sent to the Link layer (layer 2) of the CNP protocol stack. Refer to Annex A for a precise specification of the packet formats corresponding to the CNP protocol.

5.2.2 Addressing schemes

Different CNP protocols generally use different addressing schemes to exchange packets. Although it is generally not necessary to understand the contents of a CNP packet or its addresses in order to tunnel CNP packets over IP, some aspects of the CNP addressing scheme are reflected in the process of configuration. This is especially true when it comes to setting up the IP channels that are used for tunnelling. Since CNP protocols use different addressing schemes the terminology used in the main body of this specification for describing addresses are meant to be general and rich enough to describe the superset of addressing schemes used in all CNP protocols. The following CNP addressing terms are used in this specification.

- Unique ID. This refers to an ID that is globally unique to all devices within a specific protocol. Unique ID's are generally fixed in nature in that they never change through the life of a device.
- Domain. This is the highest level of a three level hierarchical addressing scheme. Domain ID's should be unique within a particular network. This means that in a particular network where Domains are used if two devices have the same Domain ID they belong to the same Domain. Domain ID's are generally logical in nature and can be changed and configured.
- Subnet. This is the middle level of a three level hierarchical addressing scheme. Subnet ID's should be unique within a particular domain. This means that in a particular network where subnet ID's are used if two devices have the same Domain ID and the same Subnet ID then they belong to the same Subnet. Some CNP's do not use Domains in which case the Subnet may be the highest level of address for a device. Subnet ID's are generally logical in nature and can be changed and configured.
- Node. This is the lowest level of any hierarchical addressing scheme. Node ID's should be unique within a particular Subnet. No two devices within the same subset should have the same Node ID. Node ID's are generally logical in nature and can be changed and configured.
- Group. Groups are an orthogonal addressing scheme to the hierarchical Domain/Subnet/Node triplet just described. Groups are used to allow multi-casting of messages. Some CNP's may not support group addresses and even those that do will have different rules for how they relate to the other addressing schemes. These considerations are not relevant to this specification.

The definitions above are fairly general and are provided as a guideline for how to map the CNP protocol to these terms. In general how the various addressing schemes work within a CNP protocol are not relevant to this specification. It is only necessary to know what the various addressing terms refer to.

Bestelformulier

NEN

Stuur naar:

NEN Standards Products & Services
t.a.v. afdeling Klantenservice
Antwoordnummer 10214
2600 WB Delft

NEN Standards Products & Services

Postbus 5059
2600 GB Delft

Vlinderweg 6
2623 AX Delft

T (015) 2 690 390
F (015) 2 690 271

www.nen.nl/normshop

Ja, ik bestel

__ ex. ISO/IEC 14908-4:2012 en Information technology - Control network protocol - Part 4: IP communication € 147.90

Wilt u deze norm in PDF-formaat? Deze bestelt u eenvoudig via www.nen.nl/normshop

Gratis e-mailnieuwsbrieven

Wilt u op de hoogte blijven van de laatste ontwikkelingen op het gebied van normen, normalisatie en regelgeving? Neem dan een gratis abonnement op een van onze e-mailnieuwsbrieven. www.nen.nl/nieuwsbrieven

Retourneren

Fax: (015) 2 690 271
E-mail: klantenservice@nen.nl
Post: NEN Standards Products & Services,
t.a.v. afdeling Klantenservice
Antwoordnummer 10214,
2600 WB Delft
(geen postzegel nodig).

Gegevens

Bedrijf / Instelling

T.a.v. O M O V

E-mail

Klantnummer NEN

Uw ordernummer BTW nummer

Postbus / Adres

Postcode Plaats

Telefoon Fax

Factuuradres (indien dit afwijkt van bovenstaand adres)

Postbus / Adres

Postcode Plaats

Datum Handtekening

Voorwaarden

- De prijzen zijn geldig tot 31 december 2016, tenzij anders aangegeven.
- Alle prijzen zijn excl. btw, verzend- en handelingskosten en onder voorbehoud bij o.m. ISO- en IEC-normen.
- Bestelt u via de normshop een pdf, dan betaalt u geen handeling en verzendkosten.
- Meer informatie: telefoon (015) 2 690 391, dagelijks van 8.30 tot 17.00 uur.
- Wijzigingen en typfouten in teksten en prijsinformatie voorbehouden.
- U kunt onze algemene voorwaarden terugvinden op: www.nen.nl/leveringsvoorwaarden.