
Fluid power systems — O-rings —

**Part 1:
Inside diameters, cross-sections,
tolerances and designation codes**

Transmissions hydrauliques et pneumatiques — Joints toriques —

*Partie 1: Diamètres intérieurs, sections, tolérances et codes
d'identification dimensionnelle*

Dit document mag slechts op een stand-alone PC worden geïnstalleerd. Gebruik op een netwerk is alleen toestaan als een aanvullende licentieovereenkomst voor netwerkgebruik met NEN is afgesloten. This document may only be used on a stand-alone PC. Use in a network is only permitted when a supplementary license agreement for us in a network with NEN has been concluded.

Preview



Reference number
ISO 3601-1:2012(E)

© ISO 2012

Copyrighted
Preview



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

| | |
|--|-----------|
| Foreword | iv |
| Introduction | v |
| 1 Scope | 1 |
| 2 Normative references | 1 |
| 3 Terms and definitions | 1 |
| 4 Symbols | 1 |
| 5 Configuration | 2 |
| 6 Inside diameters, d_1 , cross-sections (section diameter), d_2 , and tolerances | 2 |
| 7 Designation codes | 3 |
| 8 Methods of measuring for receiving inspection | 4 |
| 9 Identification statement (reference to this part of ISO 3601) | 4 |
| Annex A (normative) Recommended inside diameter tolerances and cross-section tolerances for non-standard (custom) O-ring values | 31 |
| Annex B (informative) Example method of measuring for receiving inspection | 34 |
| Bibliography | 36 |

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 3601-1 was prepared by Technical Committee ISO/TC 131, *Fluid power systems*, Subcommittee SC 7, *Sealing devices*.

This fifth edition cancels and replaces the fourth edition (ISO 3601-1:2008), which has been technically revised. It also incorporates the Technical Corrigenda ISO 3601-1:2008/Cor 1:2009 and ISO 3601-1:2008/Cor 2:2009.

ISO 3601 consists of the following parts, under the general title *Fluid power systems — O-rings*:

- *Part 1: Inside diameters, cross-sections, tolerances and designation codes*
- *Part 2: Housing dimensions for general applications*
- *Part 3: Quality acceptance criteria*
- *Part 4: Anti-extrusion rings (back-up rings)*
- *Part 5: Suitability of elastomeric materials for industrial applications*

Introduction

In fluid power systems, power is transmitted and controlled through a fluid (liquid or gas) under pressure within an enclosed circuit. To avoid leakage or to seal different chambers of a component from each other, sealing devices are used. O-rings are one type of sealing device.

Forbese.nl
Preview

Voorbeeld
Preview

Fluid power systems — O-rings —

Part 1: Inside diameters, cross-sections, tolerances and designation codes

1 Scope

This part of ISO 3601 specifies the inside diameters, cross-sections, tolerances and designation codes for O-rings used in fluid power systems for general industrial and aerospace applications.

The dimensions and tolerances specified in this part of ISO 3601 are suitable for any elastomeric material, provided that suitable tooling is available.

NOTE The tooling most commonly available is based on 70 IRHD NBR shrinkage rates (see ISO 48). For materials that shrink differently from this standard NBR compound, a special mould can be required to maintain the mean diameters and the tolerance limits listed.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 48, *Rubber, vulcanized or thermoplastic — Determination of hardness (hardness between 10 IRHD and 100 IRHD)*

ISO 3601-3, *Fluid power systems — O-rings — Part 3: Quality acceptance criteria*

ISO 5598, *Fluid power systems and components — Vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5598 apply.

4 Symbols

The following symbols are used in this part of ISO 3601:

- d_1 O-ring inside diameter;
- d_2 O-ring cross-section diameter.

5 Configuration

The shape of the O-ring shall be toroidal, as shown in Figure 1.

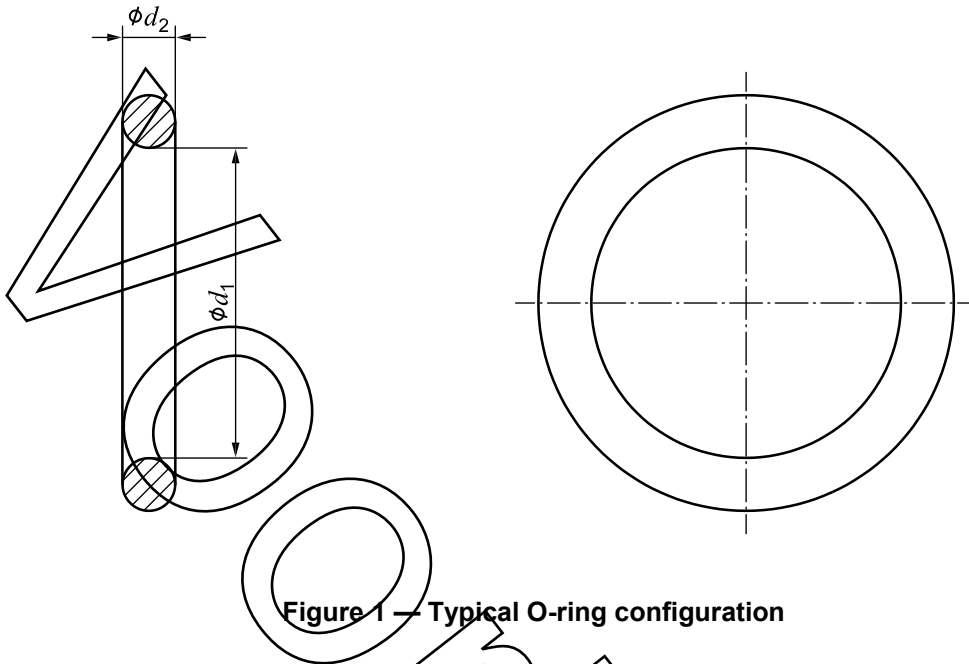


Figure 1 — Typical O-ring configuration

6 Inside diameters, d_1 , cross-sections (section diameter), d_2 , and tolerances


6.1 The combinations of inside diameters and cross-section diameters shall be chosen depending on the application:

- from Tables 1 through 6 for general industrial applications;
- from Tables 7 through 11 for aerospace applications.

6.2 For industrial applications, two classes of inside diameter tolerances, class A and class B, are specified. The tolerance of class B O-rings is based on Equation (A.1). Class A O-rings have tighter inside diameter tolerances than class B O-rings and are suitable for industrial or aerospace applications when the application or the housing require tighter tolerances. Class B O-rings have dimensions and tolerances suitable for general-purpose applications. The inside diameter tolerances are based on Equation (A.1). For information, Figure 2 shows a graphical comparison of the inside-diameter tolerances for class A and class B O-rings.

6.3 Cross-section tolerances for non-standard (custom) O-rings for general industrial applications not listed in Tables 1 through 6 can be chosen from Table A.1. Tolerances for inside diameters for non-standard (custom) class A O-rings are listed in Table A.2. Equation (A.1) can be used to calculate inside diameter tolerances for non-standard (custom) class B O-rings.

In marginal cases, the compliance with the limits of the shape deviations and surface imperfections should be considered besides the dimensional tolerances. See ISO 3601-3.

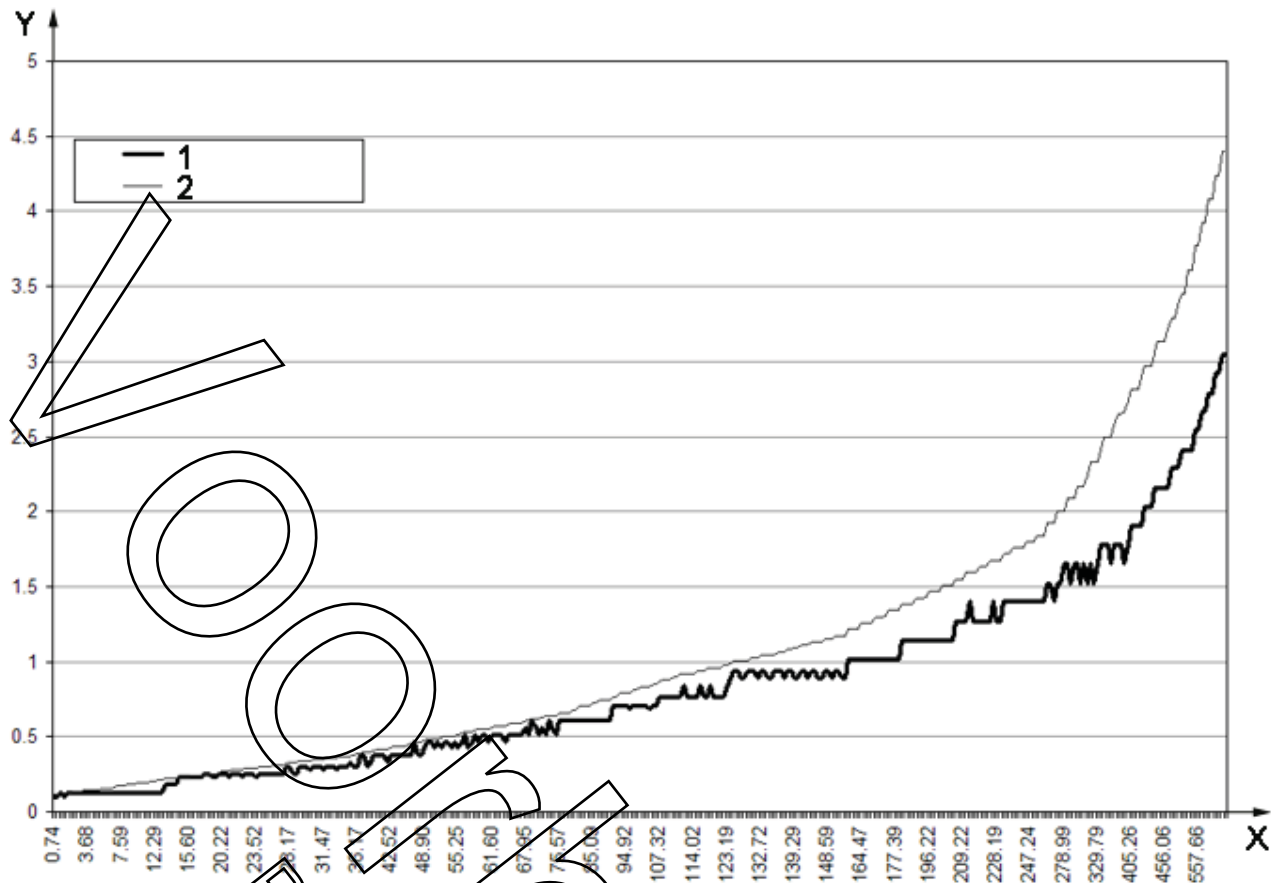

Key

- X O-ring inside diameter, d_1 , expressed in millimetres
 Y \pm tolerances, expressed in millimetres
 1 class A tolerance
 2 class B tolerance

Figure 2 — Graphical comparison of inside diameter tolerances for class A and class B O-rings

7 Designation codes

7.1 O-rings for general industrial applications that conform to this part of ISO 3601 shall be designated as follows:

- the word "O-ring" followed by a hyphen;
- "ISO3601-1" followed by a hyphen;
- the size code from the relevant table (see Tables 1 through 6) and "A" or "B" for the inside diameter tolerance class, followed by a hyphen;
- the nominal inside diameter and cross-section dimensions, separated by an "x" and followed by a hyphen;

Bestelformulier

Stuur naar:

NEN Standards Products & Services
t.a.v. afdeling Klantenservice
Antwoordnummer 10214
2600 WB Delft



NEN Standards Products & Services

Postbus 5059
2600 GB Delft

Vlinderweg 6
2623 AX Delft

T (015) 2 690 390
F (015) 2 690 271

www.nen.nl/normshop

Ja, ik bestel

__ ex. ISO 3601-1:2012 en Hydrauliek en pneumatiek - O-ringen - Deel 1: Inwendige diameters, doorsneden, toleranties en aanduidingcodes € 132.95

Wilt u deze norm in PDF-formaat? Deze bestelt u eenvoudig via www.nen.nl/normshop

Gratis e-mailnieuwsbrieven

Wilt u op de hoogte blijven van de laatste ontwikkelingen op het gebied van normen, normalisatie en regelgeving? Neem dan een gratis abonnement op een van onze e-mailnieuwsbrieven. www.nen.nl/nieuwsbrieven

Gegevens

Bedrijf / Instelling

T.a.v. O M O V

E-mail

Klantnummer NEN

Uw ordernummer BTW nummer

Postbus / Adres

Postcode Plaats

Telefoon Fax

Factuuradres (indien dit afwijkt van bovenstaand adres)

Postbus / Adres

Postcode Plaats

Datum Handtekening

Retourneren

Fax: 015 2 690 271

E-mail: klantenservice@nen.nl

Post: NEN Standards Products & Services,

t.a.v. afdeling Klantenservice
Antwoordnummer 10214,
2600 WB Delft

(geen postzegel nodig).

Voorwaarden

- De prijzen zijn geldig tot 31 december 2018, tenzij anders aangegeven.
- Alle prijzen zijn excl. btw, verzend- en handelingskosten en onder voorbehoud bij o.m. ISO- en IEC-normen.
- Bestelt u via de normshop een pdf, dan betaalt u geen handeling en verzendkosten.
- Meer informatie: telefoon 015 2 690 391, dagelijks van 8.30 tot 17.00 uur.
- Wijzigingen en typfouten in teksten en prijsinformatie voorbehouden.
- U kunt onze algemene voorwaarden terugvinden op: www.nen.nl/leveringsvoorwaarden.