



Nederlandse norm

# **NEN-ISO/IEC 24730-62**

(en)

Information technology - Real time locating systems (RTLS) - Part 62: High rate pulse repetition frequency Ultra Wide Band (UWB) air interface (ISO/IEC 24730-62:2013, IDT)

ICS 35.040  
september 2013

Als Nederlandse norm is aanvaard:

- ISO/IEC 24730-62:2013, IDT

OOORBB  
Preview

Normcommissie 381029 "Coding of audio, picture, multimedia..."



**THIS PUBLICATION IS COPYRIGHT PROTECTED**

**DEZE PUBLICATIE IS AUTEURSRECHTELIJK BESCHERMD**

Apart from exceptions provided by the law, nothing from this publication may be duplicated and/or published by means of photocopy, microfilm, storage in computer files or otherwise, which also applies to full or partial processing, without the written consent of the Netherlands Standardization Institute.

The Netherlands Standardization Institute shall, with the exclusion of any other beneficiary, collect payments owed by third parties for duplication and/or act in and out of law, where this authority is not transferred or falls by right to the Reproduction Rights Foundation.

Auteursrecht voorbehouden. Behoudens uitzondering door de wet gesteld mag zonder schriftelijke toestemming van het Nederlands Normalisatie-instituut niets uit deze uitgave worden veeveelvoudigd en/of openbaar gemaakt door middel van fotokopie, microfilm, opslag in computerbestanden of anderszins, hetgeen ook van toepassing is op gehele of gedeeltelijke bewerking.

Het Nederlands Normalisatie-instituut is met uitsluiting van ieder ander gerechtigd de door derden verschuldigde vergoedingen voor veeveelvoudiging te innen en/of daartoe in en buiten rechte op te treden, voor zover deze bevoegdheid niet is overgedragen c.q. rechtens toekomt aan de Stichting Reprorecht.

Although the utmost care has been taken with this publication, errors and omissions cannot be entirely excluded. The Netherlands Standardization Institute and/or the members of the committees therefore accept no liability, not even for direct or indirect damage, occurring due to or in relation with the application of publications issued by the Netherlands Standardization Institute.

Hoewel bij deze uitgave de uiterste zorg is nagestreefd, kunnen fouten en onvolledigheden niet geheel worden uitgesloten. Het Nederlands Normalisatie-instituut en/of de leden van de commissies aanvaarden derhalve geen enkele aansprakelijkheid, ook niet voor directe of indirecte schade, ontstaan door of verband houdend met toepassing van door het Nederlands Normalisatie-instituut gepubliceerde uitgaven.

Preview

ISO/IEC 24730-62

---

---

**Information technology — Real time  
locating systems (RTLS) —**

**Part 62:  
High rate pulse repetition frequency Ultra  
Wide Band (UWB) air interface**

*Technologie de l'information — Systèmes de localisation en temps réel  
(RTLS) —*

*Partie 62: Interface aérienne ultra large bande (UWB) à impulsions  
haute fréquence de répétition*

Copyrighted  
Preview



**COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

Foreword .....	v
Introduction .....	vi
1 Scope .....	1
2 Normative references .....	1
3 Terms, definitions, and abbreviated terms .....	2
3.1 Terms and definitions .....	2
3.2 Abbreviated terms .....	3
4 Overview .....	4
4.1 Components .....	4
4.2 Not covered by the standard .....	5
4.3 System .....	5
4.4 Document structure .....	5
5 Physical (PHY) layer specification .....	5
5.1 General .....	5
5.2 Default operating mode for a HRP UWB tag .....	6
5.3 PPDU format .....	7
5.3.1 PPDU encoding process .....	7
5.3.2 Symbol structure .....	9
5.3.3 PSDU timing parameters .....	10
5.3.4 Preamble timing parameters .....	12
5.3.5 SHR preamble .....	13
5.3.6 PHY header (PHR) .....	16
5.3.7 Data field .....	18
5.4 UWB PHY modulation .....	19
5.4.1 Modulation mathematical framework .....	19
5.4.2 Spreading .....	19
5.4.3 Forward error correction (FEC) .....	21
5.5 UWB PHY RF requirements .....	23
5.5.1 Operating frequency bands .....	23
5.5.2 Channel assignments .....	23
5.5.3 Transmitter specification .....	23
5.6 Timestamps and time units .....	26
5.6.1 Time units .....	26
5.6.2 Antenna delays .....	26
6 Basic message format .....	26
6.1 Message structure and processing rules .....	26
6.1.1 Time of arrival / Time of sending .....	27
6.2 Frame Check Sequence (FCS) .....	27
7 One-way communication – blink message .....	28
7.1 Encoding of blink frames with ISO/IEC 15963 tag ID .....	28
7.1.1 Sub-fields of the blink frame with ISO ID .....	29
7.2 Encoding of blink frames with IEEE EUI-64 tag ID .....	31
7.2.1 Sub-fields of the blink frame with IEEE ID .....	31
8 Two-way communication – data messages .....	35
8.1 Data Messages .....	35
8.1.1 Data frame sub-fields .....	35
8.2 Operation of two-way communication .....	36
8.2.1 The mechanics of two-way Communication .....	37

**ISO/IEC 24730-62:2013(E)**

<b>8.2.2</b>	<b>Activity Control .....</b>	<b>38</b>
<b>8.2.3</b>	<b>Read Tag Capabilities .....</b>	<b>39</b>
<b>8.2.4</b>	<b>Read Tag Configuration .....</b>	<b>40</b>
<b>8.2.5</b>	<b>Set Tag Configuration .....</b>	<b>42</b>
<b>8.2.6</b>	<b>Perform two-way ranging.....</b>	<b>43</b>
<b>Annex A (informative) Using ISO/IEC 24730-61 and ISO/IEC 24730-62 for RTLS Applications.....</b>		<b>46</b>
<b>Bibliography.....</b>		<b>57</b>

Voorbereid  
Preview

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 24730-62 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 31, *Automatic identification and data capture techniques*.

ISO/IEC 24730 consists of the following parts, under the general title *Information technology — Real time locating systems (RTL)*:

- Part 1: Application program interface (API)
- Part 2: Direct Sequence Spread Spectrum (DSSS) 2,4 GHz air interface protocol
- Part 5: Chirp spread spectrum (CSS) at 2,4 GHz air interface
- Part 21: Direct Sequence Spread Spectrum (DSSS) 2,4 GHz air interface protocol: Transmitters operating with a single spread code and employing a DBPSK data encoding and BPSK spreading scheme
- Part 22: Direct Sequence Spread Spectrum (DSSS) 2,4 GHz air interface protocol: Transmitters operating with multiple spread codes and employing a QPSK data encoding and Walsh offset QPSK (WOQPSK) spreading scheme
- Part 61: Low rate pulse repetition frequency Ultra Wide Band (UWB) air interface
- Part 62: High rate pulse repetition frequency Ultra Wide Band (UWB) air interface

## Introduction

This series of standards defines one Air Interface Protocol for Real Time Locating Systems (RTLS) for use in asset management and is intended to allow for compatibility and to encourage interoperability of products for the growing RTLS market.

This document, the high rate pulse repetition frequency (HRP) UWB Air Interface Protocol, establishes a technical standard for Real Time Locating Systems that operate at an internationally available UWB frequency bands and that are intended to provide accurate location (e.g. within some tens of centimetres) with frequent updates (for example, every second).

Real Time Locating Systems are wireless systems with the ability to locate the position of an item anywhere in a defined space (local/campus, wide area/regional, global) at a point in time that is, or is close to, real time. Position is derived by measurements of the physical properties of the radio link.

Conceptually there are four classifications of RTLS:

- Locating an asset via satellite - requires line-of-sight - accuracy to 10 meters
- Locating an asset in a controlled area, e.g., warehouse, campus, airport - area of interest is instrumented - accuracy to 3 meters
- Locating an asset in a more confined area - area of interest is instrumented - accuracy to tens of centimetres
- Locating an asset over a terrestrial area using a terrestrial mounted receivers over a wide area, cell phone towers for example – accuracy 200 meters

With a further two methods of locating an object which are really RFID rather than RTLS:

- Locating an asset by virtue of the fact that the asset has passed point A at a certain time and has not passed point B
- Locating an asset by virtue of providing a homing signal whereby a person with a handheld can find an asset

Method of location is through identification and location, generally through multilateration

- Types
  - Time of Flight Ranging Systems
  - Amplitude Triangulation
  - Time Difference of Arrival (TDOA)
  - Cellular Triangulation
  - Satellite multilateration
  - Angle of Arrival

This standard defines the air interface protocol needed for the creation of an RTLS system using HRP UWB which is a physical layer UWB signalling mechanism (based on standard IEEE 802.15.4a UWB) and employing high rate pulse repetition frequencies (PRF) 16 MHz or 64 MHz, and a combination of burst position modulation (BPM) and binary phase-shift keying (BPSK).



# Information technology — Real time locating systems (RTLS) —

Part 62:

## High rate pulse repetition frequency Ultra Wide Band (UWB) air interface

### 1 Scope

This part of ISO/IEC 24730 defines the air-interface for real time locating systems (RTLS) using a physical layer Ultra Wide Band (UWB) signalling mechanism (based on IEEE 802.15.4a UWB). This modulation scheme employs high rate pulse repetition frequencies (PRF) 16 MHz or 64 MHz, and a combination of burst position modulation (BPM) and binary phase-shift keying (BPSK) giving an extremely high level of performance with a fully coherent receiver.

In addition to defining the air interface protocol (AIP) in terms of the physical layer modulation, this part of ISO/IEC 24730 also defines the AIP in terms of the messages sent over the air. This AIP supports simple one-way communication of a basic blink that may be used for a one-way Time Difference of Arrival (TDOA) based RTLS, where mobile tags periodically transmit the blink message which is received by an infrastructure consisting of a number of fixed reader nodes.

This AIP also optionally supports bidirectional communication and two-way ranging between the readers and tags of an RTLS. The support of two-way ranging depends on additionally including a UWB receiver in the tag and UWB transmitters in the reader infrastructure.

The mandatory default operational mode ensures interoperability between tags and infrastructure from various manufacturers, while the availability of several options offers flexibility to the developer of the infrastructure to adapt the behaviour of the overall system to the specific needs of his application.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC/IEEE 8802-15-4, *Information technology — Telecommunications and information exchange between systems — Local and metropolitan area networks — Specific requirements Part 15-4: Wireless Medium Access Control (MAC) and Physical Layer (PHY) Specifications for Low-Rate Wireless Personal Area Networks (WPANs)*

ISO/IEC 15963, *Information technology — Radio frequency identification for item management — Unique identification for RF tags*

ISO/IEC 19762, *Information technology AIDC techniques — Harmonized vocabulary — (all parts)*

## ISO/IEC 24730-62:2013(E)

### 3 Terms, definitions, and abbreviated terms

#### 3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC/IEEE 8802-15-4, ISO/IEC 19762 (all parts), and the following apply.

##### 3.1.1

##### **burst**

group of ultra wide band (UWB) pulses occurring at consecutive chip periods

##### 3.1.2

##### **complex channel**

combination of a channel [radio frequency (RF) center frequency] and a ternary code sequence

##### 3.1.3

##### **frame**

format of aggregated bits that are transmitted together in time

##### 3.1.4

##### **hybrid modulation**

modulation used in the ultra wide band (UWB) physical layer (PHY) that combines both binary phase-shift keying (BPSK) and burst position modulation (BPM) so that both coherent and non-coherent receivers can be used to demodulate the signal

##### 3.1.5

##### **idle period**

duration of time where no transmitter activity is scheduled to take place

##### 3.1.6

##### **local clock**

symbol clock internal to a device

##### 3.1.7

##### **mean pulse repetition frequency (PRF)**

total number of pulses within a symbol divided by the symbol duration

##### 3.1.8

##### **payload data**

contents of a data message that is being transmitted

##### 3.1.9

##### **peak pulse repetition frequency (PRF)**

maximum rate at which an ultra wide band (UWB) physical layer (PHY) emits pulses

##### 3.1.10

##### **ranging frame (RFRAME)**

ultra wide band (UWB) frame having the ranging bit set in the physical layer (PHY) header (PHR)

##### 3.1.11

##### **ranging marker (RMARKER)**

first ultra wide band (UWB) pulse of the first bit of the physical layer (PHY) header (PHR) of a ranging frame (RFRAME)

### 3.1.12 symbol

period of time and a portion of the transmitted signal that is logically considered to be a unit signaling event conveying some defined number of data bits or repeated portion of the synchronization signal

## 3.2 Abbreviated terms

AGC	automatic gain control
API	application program interface
BPM	burst position modulation
BPSK	binary phase-shift keying
CRC	cyclic redundancy check
DPS	dynamic preamble selection
DSN	data sequence number
FCS	frame check sequence
FEC	forward error correction
HRP	high rate PRF
LFSR	linear feedback shift register
LRP	low rate PRF
LSB	least significant bit
MAC	medium access control
MSB	most significant bit
PHR	PHY header
PHY	physical layer
PPDU	PHY protocol data unit
PRBS	pseudo-random binary sequence
PRF	pulse repetition frequency
PSD	power spectral density
PSDU	PHY service data unit
RF	radio frequency
RFID	Radio Frequency Identification
RFRAME	ranging frame
RMARKER	ranging marker
RTLS	Real Time Locating System
RX	receive or receiver
SFD	start-of-frame delimiter
SHR	synchronization header
SNR	signal-to-noise ratio
SYNC	synchronization
TDOA	time difference of arrival
TOF	time of flight

TX transmit or transmitter  
 UWB ultra wide band

4 Overview

4.1 Components

The major components of a Real Time Locating System (RTLS) and the relationship of those components are shown in Figure 1. As shown in this figure the tags communicate with an infrastructure. The infrastructure provides an Application Program Interface (API) through which an application can control the RTLS and retrieve information about location and state of tags.

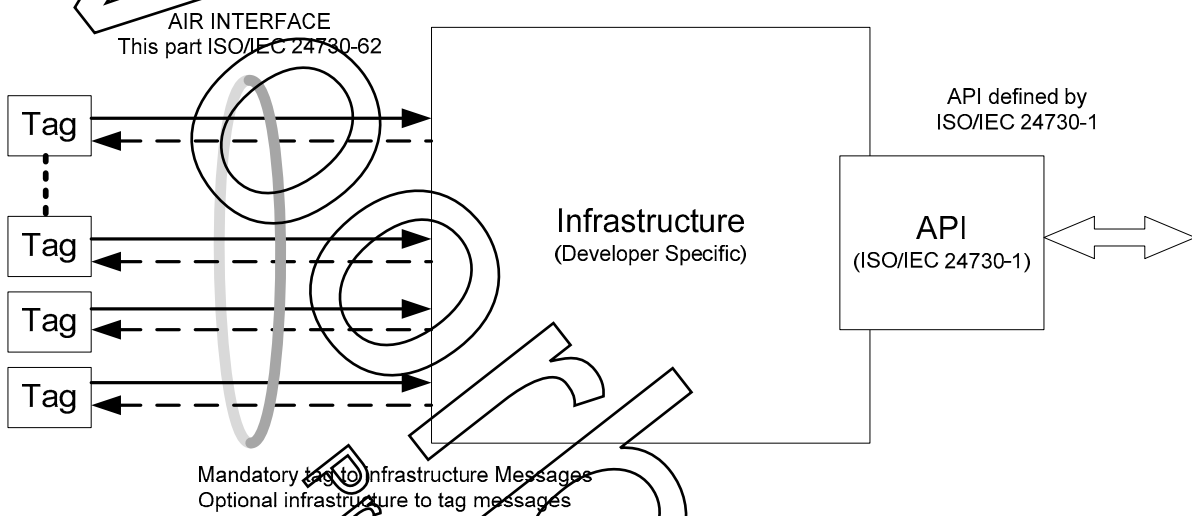


Figure 1 — RTLS components

As indicated in Figure 1 tags communicate with infrastructure over an air interface. Generally the air interface includes the definition of waveforms, formats of packets as well as commands and reports to be exchanged between tags and infrastructure. This can be depicted in a layered approach as shown in Figure 2. Similar interpretations can be found in other standards e.g. in ISO/IEC 18000.<sup>[1]</sup>

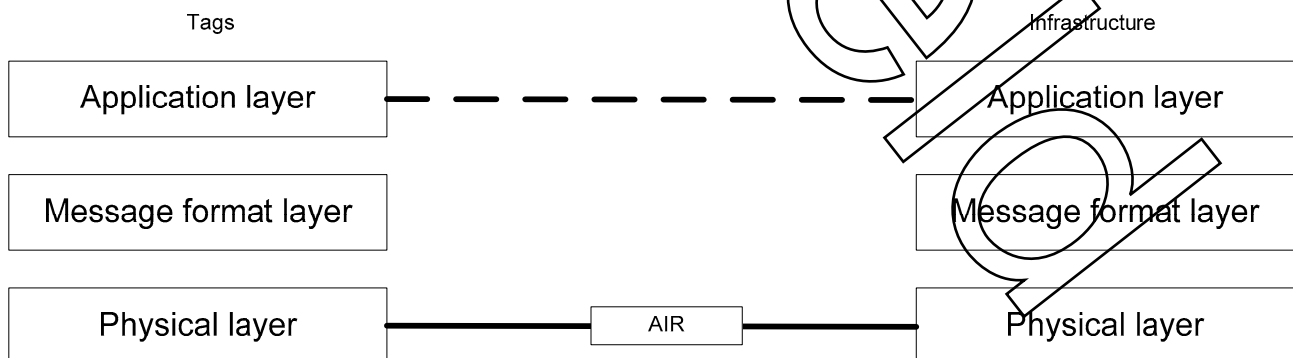


Figure 2 — air interface layers

# Bestelformulier

## Stuur naar:

NEN Standards Products & Services  
t.a.v. afdeling Klantenservice  
Antwoordnummer 10214  
2600 WB Delft



**NEN** Standards Products & Services

Postbus 5059  
2600 GB Delft

Vlinderweg 6  
2623 AX Delft

T (015) 2 690 390  
F (015) 2 690 271

[www.nen.nl/normshop](http://www.nen.nl/normshop)

## Ja, ik bestel

\_\_ ex. NEN-ISO/IEC 24730-62:2013 en Information technology - Real time locating systems (RTLS) - Part 62: High rate pulse repetition frequency Ultra Wide Band (UWB) air interface € 161.21

**Wilt u deze norm in PDF-formaat? Deze bestelt u eenvoudig via [www.nen.nl/normshop](http://www.nen.nl/normshop)**

### Gratis e-mailnieuwsbrieven

Wilt u op de hoogte blijven van de laatste ontwikkelingen op het gebied van normen, normalisatie en regelgeving? Neem dan een gratis abonnement op een van onze e-mailnieuwsbrieven. [www.nen.nl/nieuwsbrieven](http://www.nen.nl/nieuwsbrieven)

## Gegevens

Bedrijf / Instelling

T.a.v.  O M O V

E-mail

Klantnummer NEN

Uw ordernummer  BTW nummer

Postbus / Adres

Postcode  Plaats

Telefoon  Fax

**Factuuradres** (indien dit afwijkt van bovenstaand adres)

Postbus / Adres

Postcode  Plaats

Datum  Handtekening

### Retourneren

Fax: 015 2 690 271

E-mail: [klantenservice@nen.nl](mailto:klantenservice@nen.nl)

Post: NEN Standards Products & Services,

t.a.v. afdeling Klantenservice  
Antwoordnummer 10214,  
2600 WB Delft

(geen postzegel nodig).

### Voorwaarden

- De prijzen zijn geldig tot 31 december 2018, tenzij anders aangegeven.
- Alle prijzen zijn excl. btw, verzend- en handelingskosten en onder voorbehoud bij o.m. ISO- en IEC-normen.
- Bestelt u via de normshop een pdf, dan betaalt u geen handeling en verzendkosten.
- Meer informatie: telefoon 015 2 690 391, dagelijks van 8.30 tot 17.00 uur.
- Wijzigingen en typfouten in teksten en prijsinformatie voorbehouden.
- U kunt onze algemene voorwaarden terugvinden op: [www.nen.nl/leveringsvoorwaarden](http://www.nen.nl/leveringsvoorwaarden).