

norm**NEN-EN 50342-1**

Lead-acid starter batteries - Part 1:
General requirements and methods of
test

Publicatie uitsluitend voor commentaar

juni 2014
ICS 01.080.20; 29.220.20

Commentaar vóór 2014-07-21

Zal vervangen NEN-EN 50342-1:2006; NEN-EN 50342-1:2006/A1:2011

Als Europees normontwerp is gepubliceerd: prEN 50342-1:2014, IDT

Definitief vastgestelde normen zullen als Nederlandse norm gelden. Daarom wordt dit normontwerp in Nederland voor commentaar gepubliceerd. Op het ontwerp ingebracht commentaar zal aan de bevoegde normcommissie worden voorgelegd die hiermee rekening zal houden bij de bepaling van de Nederlandse stem. Indien er geen bezwaar bij NEN wordt gebracht, kan dat leiden tot ongewijzigde definitieve vaststelling van het ontwerp als norm.

Van Europese normen bestaan drie officiële versies: Engels, Frans en Duits. Voor Nederland zal de Engelse versie gelden. Daarnaast kan er gekozen worden voor een andere geautoriseerde versie in het Nederlands.

Nederlands Elektrotechnisch Comité



THIS PUBLICATION IS COPYRIGHT PROTECTED

DEZE PUBLICATIE IS AUTEURSRECHTELIJK BESCHERMD

Apart from exceptions provided by the law, nothing from this publication may be duplicated and/or published by means of photocopy, microfilm, storage in computer files or otherwise, which also applies to full or partial processing, without the written consent of the Netherlands Standardization Institute.

The Netherlands Standardization Institute shall, with the exclusion of any other beneficiary, collect payments owed by third parties for duplication and/or act in and out of law, where this authority is not transferred or falls by right to the Reproduction Rights Foundation.

Auteursrecht voorbehouden. Behoudens uitzondering door de wet gesteld mag zonder schriftelijke toestemming van het Nederlands Normalisatie-instituut niets uit deze uitgave worden veeleenvoudigd en/of openbaar gemaakt door middel van fotokopie, microfilm, opslag in computerbestanden of anderszins, hetgeen ook van toepassing is op gehele of gedeeltelijke bewerking.

Het Nederlands Normalisatie-instituut is met uitsluiting van ieder ander gerechtigd de door derden verschuldigde vergoedingen voor veeleenvoudiging te innen en/of daartoe in en buiten rechte op te treden, voor zover deze bevoegdheid niet is overgedragen c.q. rechtens toekomt aan de Stichting Reprorecht.

Although the utmost care has been taken with this publication, errors and omissions cannot be entirely excluded. The Netherlands Standardization Institute and/or the members of the committees therefore accept no liability, not even for direct or indirect damage, occurring due to or in relation with the application of publications issued by the Netherlands Standardization Institute.

Hoewel bij deze uitgave de uiterste zorg is nagestreefd, kunnen fouten en onvolledigheden niet geheel worden uitgesloten. Het Nederlands Normalisatie-instituut en/of de leden van de commissies aanvaarden derhalve geen enkele aansprakelijkheid, ook niet voor directe of indirecte schade, ontstaan door of verband houdend met toepassing van door het Nederlands Normalisatie-instituut gepubliceerde uitgaven.

Voorbeeld
Preview

English version

**Lead-acid starter batteries -
Part 1: General requirements and methods of test**Batteries d'accumulateurs de démarrage
au plomb -
Partie 1: Prescriptions générales et
méthodes d'essaisBlei-Akkumulatoren-Starterbatterien -
Teil 1: Allgemeine Anforderungen und
Prüfungen

This draft European Standard is submitted to CENELEC members for CENELEC enquiry.
Deadline for CENELEC: 2014-08-21.

It has been drawn up by CLC/TC 21X.

If this draft becomes a European Standard, CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CENELEC in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN/CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.

CENELECEuropean Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung**CEN-CENELEC Management Centre: Avenue Marnix 17, B - 1000 Brussels**

Contents

Page


Foreword.....	3
0 Introduction.....	4
0.1 Object.....	4
0.2 Designation of starter batteries.....	4
0.3 Condition on delivery.....	4
1 Scope.....	6
2 Normative references.....	6
3 General requirements.....	6
3.1 Identification, labelling.....	6
3.2 Marking of the polarity.....	7
4 Functional characteristics.....	7
4.1 Electrical characteristics.....	7
4.2 Mechanical characteristics.....	8
5 General test conditions.....	8
5.1 Sampling of batteries.....	8
5.2 Charging method - Definition of a fully-charged battery.....	8
5.3 Test equipment.....	9
5.4 Test sequence.....	10
6 Tests/methods and requirements.....	11
6.1 20 h capacity check.....	11
6.2 Cranking performance test.....	12
6.3 High current discharge test at low temperature.....	12
6.4 Charge acceptance test.....	13
6.5 Charge retention test.....	13
6.6 Endurance in cycles test.....	13
6.7 Deep discharge test.....	15
6.8 Water consumption test.....	15
6.9 Vibration resistance test.....	16
6.10 Electrolyte retention test.....	18
7 Dry-charged batteries.....	18
7.1 Activation of dry charged batteries.....	18
7.2 Testing of dry charged batteries.....	19
Annex A (normative) Safety labelling – Definition of the six coloured symbols.....	20
Annex B (normative) Correlation between C20 and RC.....	22
Annex C (normative) Battery performance marking.....	23

Foreword

This document (prEN 50342-1:2014) has been prepared by CLC/TC 21X "*Secondary cells and batteries*".

This document is currently submitted to the Enquiry.

This document will supersede EN 50342-1:2006.

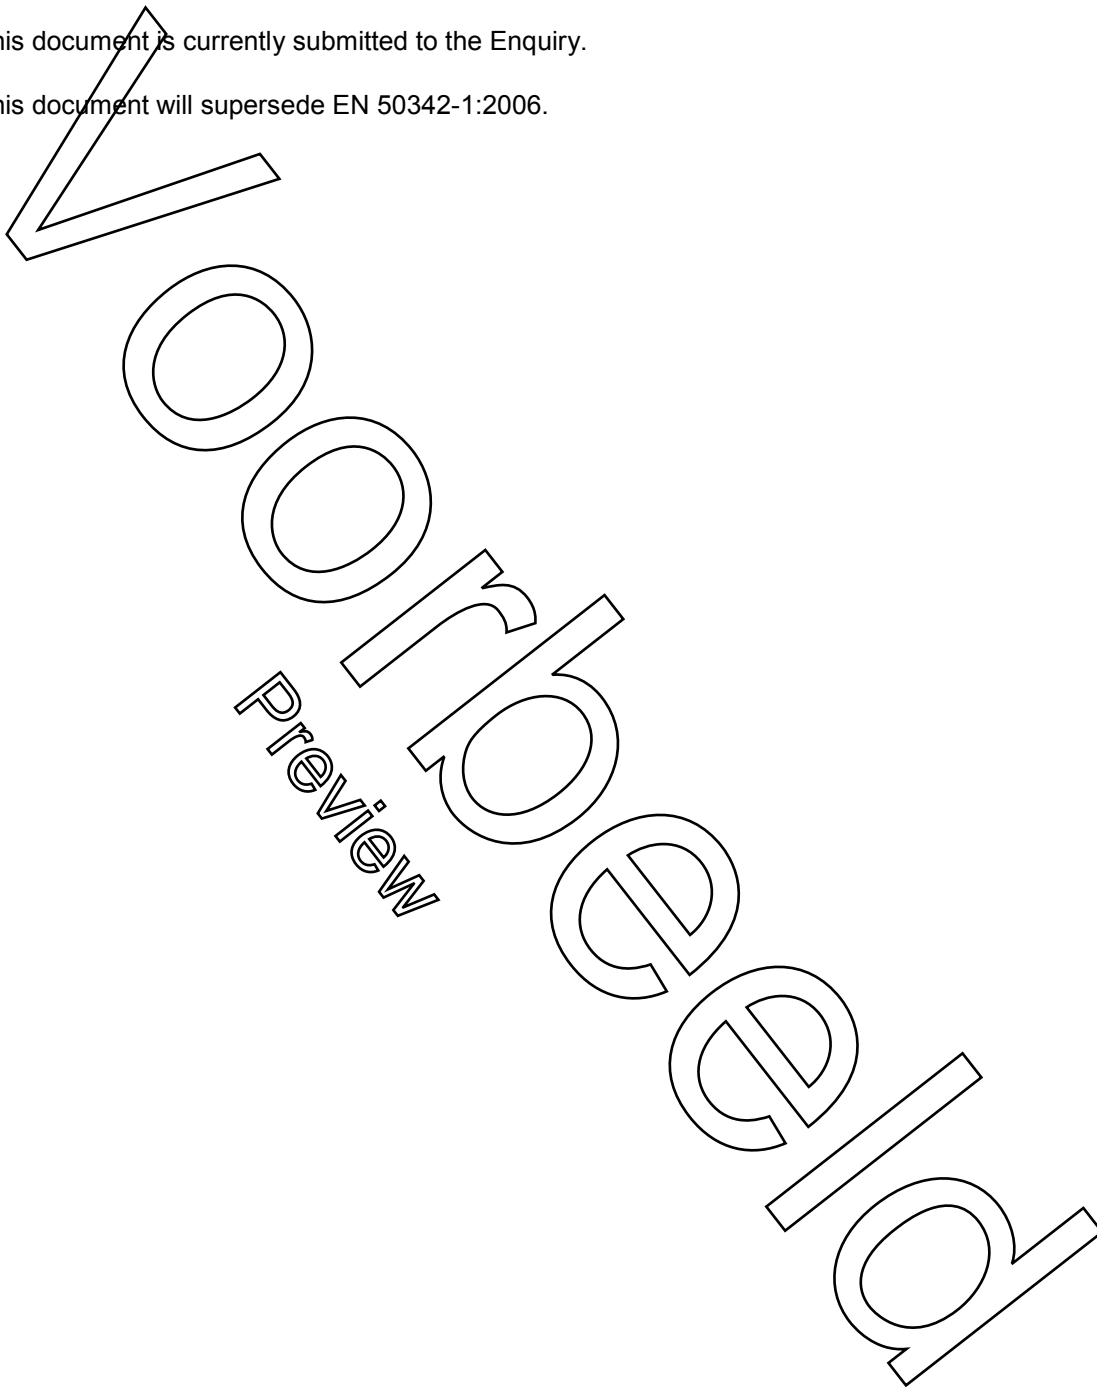

prEN 50342-1:2014 (E)

0 Introduction

0.1 Object

The object of this standard is to specify

- general requirements;
- certain essential functional characteristics, the relevant test methods and results required, for several classes and types of starter batteries.

0.2 Designation of starter batteries

Batteries are classified according to their types

Battery type	Definition
Flooded vented batteries	<p>a secondary battery having a cover provided with one or more openings through which gaseous products may escape</p> <p>EFB batteries are enhanced vented (flooded) secondary batteries, with additional special design features to significantly improve the cycling capability compared to standard flooded batteries. These batteries shall have a water consumption performance level of W3, W4 or W5.</p>
Valve regulated batteries	<p>a secondary battery which is closed under normal conditions but which has an arrangement that allows the escape of gas if the internal pressure exceeds a predetermined value. The battery cannot receive addition to the electrolyte.</p> <p>In Valve Regulated batteries, the electrolyte is immobilized.</p> <p>In case electrolyte is immobilized by absorbing in a glass mat this type of VRLA-battery is called AGM-battery (Absorbent Glass Mat).</p> <p>In case electrolyte is immobilized by fixing as gel this type of VRLA-battery is called GEL- battery</p>

0.3 Condition on delivery

0.3.1 Electrolyte density and open circuit voltage

Electrolyte density and open circuit voltage of lead acid battery are depending on state of charge and temperature.

The density of the electrolyte in all fully charged vented batteries shall be in the range 1,27 kg/l to 1,30 kg/l at 25 °C unless otherwise specified by the manufacturer.

The open circuit voltage (OCV), of fully charged batteries after a minimum of 24 h stand on open circuit, shall be in the range 12,70 V to 12,90 V for vented types and 12,80 V to 13,00 V for valve regulated types at 25 °C unless otherwise specified by the manufacturer.

0.3.2 Definition of fully charged new battery

New vented batteries may be supplied

- either in a state ready for use, filled with the appropriate electrolyte to the maximum level. 24h after an initial charge (according to 5.2), the electrolyte density or OCV shall be within the ranges specified in 0.3.1. In batteries with lid without plugs checking electrolyte density is generally not possible. In this cases OCV is to check only according 0.3.1.

- or dry charged as defined in chapter 7.

Valve regulated batteries are normally supplied in a state ready for use. 24 h after an initial charge (according to 5.2) OCV shall be within ranges specified in 0.3.1. For these batteries the electrolyte is not accessible and therefore its density cannot be checked.

Valve regulated
Preview
batteries

prEN 50342-1:2014 (E)**1 Scope**

This standard is applicable to lead-acid batteries with a nominal voltage of 12 V, used primarily as a power source for the starting of internal combustion engines, lighting and also for auxiliary equipment of internal combustion engine vehicles. These batteries are commonly called “starter batteries”. Batteries with a nominal voltage of 6 V are also included within the scope of this standard. All referenced voltages have to be divided by two for 6 V batteries.

This standard is applicable to batteries for the following purposes:

- batteries for passenger cars,
- batteries for commercial and industrial vehicles.

This standard is not applicable to batteries for other purposes, for example the starting of railcar internal combustion engines or for motorcycles.

NOTE Separate standard for motorcycle batteries is under preparation.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 50342-2:2001, Lead-acid starter batteries. Part 2: Dimensions of batteries and dimensions and marking of terminals

EN 50342-4:2009, Lead-acid starter batteries. Part 4: Dimensions of batteries for heavy commercial vehicles

EN 61429:1996/A11:1998, Marking of secondary cells and batteries with the international recycling symbol ISO 7000-1135 and indications regarding directives 93/86/EEC and 91/157/EEC

IEC 60050-482:2004, International Electrotechnical Vocabulary. Part 482: Primary and secondary cells and batteries

ECE 37, UN/ECE Regulation ECE 37, Agreement Concerning the adoption of uniform technical prescriptions for wheeled vehicles, equipment and parts which can be fitted and/or be used on wheeled vehicles and the conditions for reciprocal recognition of approvals granted on the basis of these prescriptions, Regulation No. 37: Uniform provisions concerning the approval of filament lamps for use in approved lamp units of power-driven vehicles and of their trailers.

3 General requirements**3.1 Identification, labelling**

Batteries according to this standard shall bear the following characteristics on at least one of their sides or on the top surface:

- a) the identification of manufacturer or supplier;
- b) the nominal voltage, i.e. 12 V or 6 V;
- c) Obligatory: nominal capacity C20 (Ah) (see 4.1.2),

The values of C20 for all batteries shall correspond to the electrolyte density or OCV given in section 0.3.1;

- d) Obligatory: the nominal cranking current I_{cc} (see 4.1.1);
- e) the six coloured symbols as specified in Annex A, Safety labelling;
- f) the marking for the separate collection and recycling according to EN 61429;
- g) valve regulated batteries shall be marked 'VRLA'.
- h) Label size: The capacity C20 and the cold cranking current I_{cc} (A) shall be displayed on a separate label or as text on a combined label (e.g. together with additional information of the producer or type mark). The size of the label shall be at least 3 % of the largest side of the battery. The character size high should be at least 3 mm. The label must be fixed on one of the four sides or on the lid. A multiple labelling is allowed.

- i) Batteries for micro-hybrid application shall be specifically identified

NOTE Separate standard is under preparation

- j) Date of production (this could be a part of more complex code too)
- k) Requirement levels according to water consumption, charge retention, endurance and vibration as specified in Appendix C

NOTE Batteries may be marked with other information such as the filling and charging date

3.2 Marking of the polarity

This shall be in accordance with

EN 50342-2, Part 2: Dimensions of batteries and dimensions and marking of terminals

EN 50342-4, Part 4: Dimensions of batteries for heavy commercial vehicles

4 Functional characteristics

For general definitions of terms see Part 482 of the International Electro-technical Vocabulary (IEV) (IEC 60050-482).

4.1 Electrical characteristics

4.1.1 The *cranking current* is the discharge current i_{cc} to be indicated by the manufacturer which a battery can supply at -18°C for 10 s to a minimum voltage $U_f = 7,50\text{ V}$ and complying with requirements of a simulated cranking profile according 6.2. It is used as well to check the high current discharge performance according 6.3

4.1.2 The *capacity* of a starter battery is defined for the temperature of $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$. The nominal capacity C_n in this standard is a C20. It has to be indicated by the manufacturer as nominal 20h capacity C20 (Ah).

The *nominal 20 h capacity* C_n is the electric charge (in Ah) that a battery can supply with a current:

$$I_n = \frac{C_n}{20}$$

(A)

to a final voltage $U_f = 10,50\text{ V}$.

The *effective capacity* C_e shall be determined by discharging a battery with constant current I_n to $U_f = 10,50\text{ V}$ (see 6.1).

ALTIJD DE ACTUELE NORM IN UW BEZIT HEBBEN?

Nooit meer zoeken in de systemen en uzelf de vraag stellen:
'Is NEN-EN 50342-1:2014 Ontw. en de laatste versie?'

Via het digitale platform NEN Connect heeft u altijd toegang tot de meest actuele versie van deze norm. Vervallen versies blijven ook beschikbaar. **U en uw collega's** kunnen de norm via NEN Connect makkelijk raadplagen, online en offline.

Kies voor slimmer werken en bekijk onze mogelijkheden op www.nenconnect.nl.

Heeft u vragen?

Onze Klantenservice is bereikbaar maandag tot en met vrijdag, van 8.30 tot 17.00 uur.

Telefoon: 015 2 690 391

E-mail: klantenservice@nen.nl

