
**Elastic adhesives — Testing of
adhesively bonded joints — Bead
peel test**

*Adhésifs élastiques — Essai des assemblages collés — Essai de pelage
sur cordon*

Dit document mag slechts op een stand-alone PC worden geïnstalleerd. Gebruik op een netwerk is alleen toestaan als een aanvullende licentieovereenkomst voor netwerkgebruik met NEN is afgesloten. This document may only be used on a stand-alone PC. Use in a network is only permitted when a supplementary license agreement for us in a network with NEN has been concluded.

Preview



Reference number
ISO 21194:2019(E)

© ISO 2019

Copyright
Preview



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Principle.....	1
5 Sample preparation.....	1
5.1 Materials and surface treatment.....	1
5.2 Adhesive application.....	1
6 Curing the adhesive.....	2
7 Ageing.....	2
8 Implementation.....	3
9 Evaluation.....	3
10 Test report.....	4
Annex A (informative) Example of an ageing method.....	5
Annex B (informative) Example of an evaluation according to this document.....	6
Bibliography.....	7

Copyright
 Preview

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 61, *Plastics*, Subcommittee SC 11, *Products*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Elastic adhesives — Testing of adhesively bonded joints — Bead peel test

1 Scope

This document specifies a method for evaluating the adhesion of elastic adhesives and sealants [with a minimum elongation at break of 100 % and a modulus of elasticity of maximum 10 MPa¹⁾] on various substrates. In this way, the effect of various coatings or the surface pre-treatments of the substrate materials on the adhesion can be compared. It can also be used to evaluate the influence of pre-treatment, substrate and adhesive on the long-term durability of adhesively bonded joints and seals. This test can also be used for process monitoring and quality assurance accompanying production.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 10365, *Adhesives — Designation of main failure patterns*

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

4 Principle

Adhesive beads are applied onto substrates. These are then peeled off again after curing and a possible subsequent climate resistance test. If an ageing is performed, the individual steps shall progress in succession with the test specimen, whereby a partial area is peeled off further before the ageing and after every ageing step. The failure pattern is then determined.

5 Sample preparation

5.1 Materials and surface treatment

The bonded joint materials and the surface treatment shall be selected according to the requirements of the application.

5.2 Adhesive application

For every test specimen, at least one adhesive bead with a length of minimum 80 mm, but with sufficient length for the number of intended ageing levels (each about 50 mm) shall be applied onto the jointing part.

1) The elongation and modulus of elasticity are measured according to ISO 527-2.

The bead geometry shall be defined corresponding to the later process. Alternatively, either semi-circular beads or triangular beads may be applied (see [Figure 1](#)).

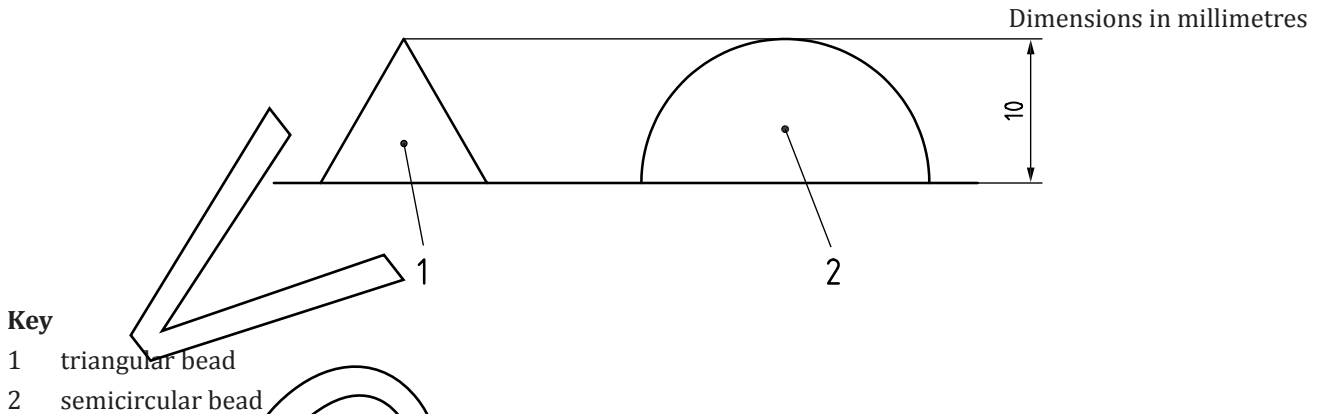


Figure 1 — Schematic representation of the adhesive application

In all cases, the height of the adhesive should be 5 mm. The adhesive component that extends over a height of 5 mm shall be removed (see [Figure 2](#)) or compacted to this height. The selected variant shall be listed in the test report (see [Clause 9](#)). Beads that are too high lead to falsified results during later peeling.

The width of the bead should be in a range between 10 mm and 15 mm.

During the application, it shall be ensured that the adhesive wets the substrate well.

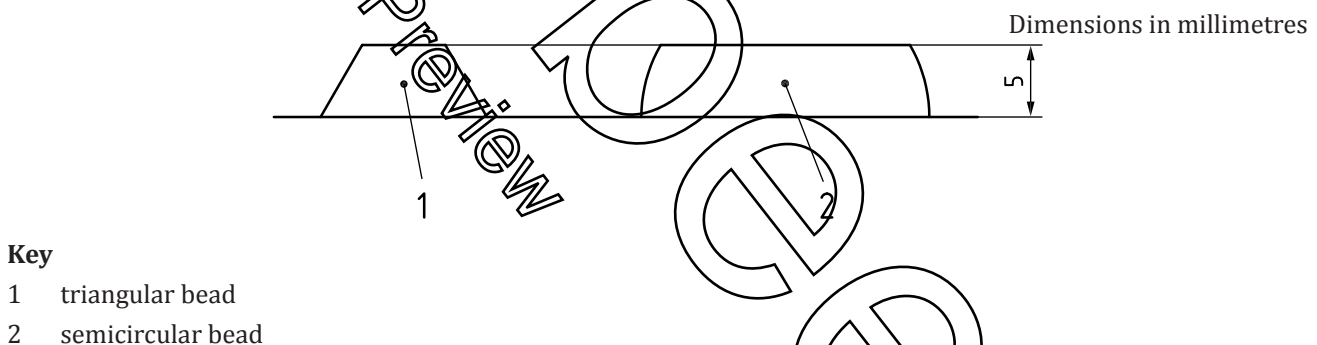


Figure 2 — Schematic representation of beads shortened to 5 mm height

6 Curing the adhesive

The curing or setting shall occur in accordance with the conditions specified for the adhesive or corresponding to the process conditions.

7 Ageing

The test specimens may be aged artificially to test the long-term resistance. The choice of ageing conditions shall correspond to the service conditions. [Annex A](#) describes, as an example, an ageing process that is often applied in practice. Also, ISO 9142 can be considered for suitable ageing regimes.

Bestelformulier

Stuur naar:

NEN Standards Products & Services
t.a.v. afdeling Klantenservice
Antwoordnummer 10214
2600 WB Delft



NEN Standards Products & Services

Postbus 5059
2600 GB Delft

Vlinderweg 6
2623 AX Delft

T (015) 2 690 390
F (015) 2 690 271

www.nen.nl/normshop

Ja, ik bestel

__ ex. ISO 21194:2019 en Lijmen voor constructiedoeleinden - Testen van
gelijmde verbindingen - korrel afpeltest € 49.02

**Wilt u deze norm in PDF-formaat? Deze bestelt u eenvoudig via
www.nen.nl/normshop**

Gratis e-mailnieuwsbrieven

Wilt u op de hoogte blijven van de laatste ontwikkelingen op het gebied van normen,
normalisatie en regelgeving? Neem dan een gratis abonnement op een van onze
e-mailnieuwsbrieven. www.nen.nl/nieuwsbrieven

Gegevens

Bedrijf / Instelling _____

T.a.v. _____ O M O V

E-mail _____

Klantnummer NEN _____

Uw ordernummer _____ BTW nummer _____

Postbus / Adres _____

Postcode _____ Plaats _____

Telefoon _____ Fax _____

Factuuradres (indien dit afwijkt van bovenstaand adres)

Postbus / Adres _____

Postcode _____ Plaats _____

Datum _____ Handtekening _____

Retourneren

Fax: 015 2 690 271

E-mail: klantenservice@nen.nl

Post: NEN Standards Products
& Services,

t.a.v. afdeling Klantenservice
Antwoordnummer 10214,
2600 WB Delft

(geen postzegel nodig).

Voorwaarden

- De prijzen zijn geldig tot 31 december 2018, tenzij anders aangegeven.
- Alle prijzen zijn excl. btw, verzend- en handelingskosten en onder voorbehoud bij o.m. ISO- en IEC-normen.
- Bestelt u via de normshop een pdf, dan betaalt u geen handeling en verzendkosten.
- Meer informatie: telefoon 015 2 690 391, dagelijks van 8.30 tot 17.00 uur.
- Wijzigingen en typfouten in teksten en prijsinformatie voorbehouden.
- U kunt onze algemene voorwaarden terugvinden op: www.nen.nl/leveringsvoorwaarden.