

norm**NEN-EN 13633**

Hang- en sluitwerk - Elektrisch gestuurde systemen voor vluchtdeursluitingen - Eisen en beproevingsmethoden

Publicatie uitsluitend voor commentaar

Building hardware - Electrically controlled panic exit systems - Requirements and test methods

juni 1999
ICS 91.190

Als Europees normontwerp is gepubliceerd: prEN 13633:1999, IDT

Definitief vastgestelde normen zullen als Nederlandse norm gelden. Daarom wordt dit normontwerp in Nederland voor commentaar gepubliceerd. Op het ontwerp ingebracht commentaar zal aan de bevoegde normcommissie worden voorgelegd die hiermee rekening zal houden bij de bepaling van de Nederlandse stem. Indien er geen bezwaar bij het NNI wordt ingebracht, kan dat leiden tot ongewijzigd definitieve vaststelling van het ontwerp als norm.

Van Europese normen bestaan drie officiële versies: Engels, Frans en Duits. Voor Nederland zal de Engelse versie gelden, tenzij voor een geautoriseerde versie in het Nederlands wordt gekozen.

Normcommissie 353 064 "Deuren, ramen en vliesgevels"

Apart from exceptions provided by the law, nothing from this publication may be duplicated and/or published by means of photocopy, microfilm, storage in computer files or otherwise, which also applies to full or partial processing, without, the written consent of the Netherlands Standards Institute.

The Netherlands Standards Institute shall with the exclusion of any other beneficiary collect payments owed by third parties for duplication and/or act in and out of law, where this authority is not transferred or falls by right to the Reproduction rights Foundation.

Auteursrecht voorbehouden. Behoudens uitzondering door de wet gesteld mag zonder schriftelijke toestemming van het Nederlands Normalisatie-instituut niets uit deze uitgave worden veelevoudigd en/of openbaar gemaakt door middel van fotokopie, microfilm, opslag in computerbestanden of anderszins, hetgeen ook van toepassing is op gehele of gedeeltelijke bewerking

Het Nederlands Normalisatie-instituut is met uitsluiting van ieder ander gerechtigd de door derden verschuldigde vergoedingen voor veelevoudiging te innen en/of daartoe in en buiten rechte op te treden, voor zover deze bevoegdheid niet is overgedragen c.q. rechtens toekomt aan de Stichting Reprorecht.

Although the utmost care has been taken with this publication, errors and omissions cannot be entirely excluded. The Netherlands Standards Institute and/or the members of the commissions therefore accept no liability, not even for direct or indirect damage, occurring due to or in relation with the application of publications put out by the Netherlands Standards Institute

Hoewel bij deze uitgave de uiterste zorg is nagestreefd, kunnen fouten en onvolledigheden niet geheel worden uitgesloten. Het Nederlands Normalisatie-instituut en/of de leden van de commissies aanvaarden derhalve geen enkele aansprakelijkheid, ook niet voor directe of indirecte schade, ontstaan door of verband houdende met toepassing van door het Nederlands Normalisatie-instituut gepubliceerde uitgaven.

ICS

English version

**Building hardware - Electrically controlled panic exit systems -
Requirements and test methods**

Quincaillerie pour le bâtiment - Systèmes de fermeture anti-panique pour issues de secours contrôlés électriquement - Prescriptions et méthodes d'essai

Schlösser und Baubeschläge - Elektrisch gesteuerte Paniktürverschlüsse - Anforderungen und Prüfverfahren

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee CEN/TC 33.

If this draft becomes a European Standard, CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Contents

1	Scope	4
2	Normative references	5
3	Definitions and diagrams	6
4	Requirements	9
5	Tests - General and test apparatus	16
6	Test methods - Procedures	17
7	Classification	24
8	Marking	26
9	Factory production control and audit testing	26
Annex A (informative)	Recommendations for installation and fixing	28
Annex B (normative)	Additional requirements for electrically controlled panic exit systems intended for use on fire/smoke door assemblies	29
Annex C (informative)	Recommendations for maintenance	30
Annex D (normative)	Installation compliance report form	31
Annex E (informative)	Routine site inspection of PES	32
Annex F (normative)	Flow chart of test procedures	33
Annex G (informative)	Structure plan of related product standards for exit devices and systems	34
Annex H (informative)	Additional recommendations for PES for use by mobility impaired people	35
	Bibliography	37
	Annex ZA (informative) Relationship with EU directive (89/106/EEC)	37
	Annex ZB (informative) Relationship with other EU directives	39

Foreword

This document has been prepared by CEN/TC 33, "Doors, windows, shutters, building hardware and curtain walling".

This document is currently submitted to the CEN Enquiry.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive 89/106/EEC.

For relationship with EU Directive(s), see informative annex ZA, which is an integral part of this document.

This European Standard is part of a group of European Standards dedicated to building hardware products.

This standard is one of a group of European Standards for exit devices developed by Technical Committee CEN/TC33.

Normative and informative annexes to this standard are indicated in the contents.

Preview

Introduction

Experience relating to escape from buildings and general safety have made it desirable that doors at exits in public buildings, places of public entertainment, shops etc. be fitted with panic devices operated by a horizontal bar to common European Standard specifications.

Increasingly, such panic devices form a part of the security system of a building and involve the use of electrical locking and controlling elements.

This standard provides specifications for such **Electrically controlled panic exit systems (PES)**.

In terms of the Construction Products Directive (89/106/EEC) (CPD), the essential requirements of this standard are to give safe and effective escape through a doorway with minimum effort and without prior knowledge of the device.

In a panic situation, a group of people will react differently from an individual. When two or more people are rushing to an escape door, probably in darkness and/or smoke, it is possible that the first one to reach the door will not necessarily operate the panic exit system, but may push the surface of the door (door under pressure) while other people will be trying to operate the horizontal bar by hand or body pressure.

In this standard priority is given to the panic operation rather than pressure and resistance to the door opening from seals, weather stripping, multiple bolt heads etc. Precedence is given to the importance of ease of opening by the young, elderly and infirm. Electrically controlled systems may allow easier operation for this group of people.

Whilst external security will be provided by the devices covered in this standard, the main objective is to enable a door to be opened at all times by hand or body pressure along its inside face on the panic exit system and not requiring the use of a key or any other object. Electrically controlled systems may allow higher security from the outside while still maintaining the requirements of a panic exit device.

For devices intended for use where panic situations are unlikely to develop, reference may be made to standard covering emergency devices operated by a lever handle or a push pad (see EN 179) or electrically controlled emergency exit systems (see WI 0033244), as shown in Annex G.

The performance tests incorporated in this standard are considered to be reproducible and as such will provide a consistent and objective assessment of the performance of these devices throughout CEN Member States.

1 Scope

This European Standard specifies requirements for the manufacture, performance and testing of **Electrically controlled panic exit systems (PES) operated by a horizontal bar as an initiating element, specifically designed for use in a panic situation.**

These systems consist of the following elements:

- a) **electrical locking element (EL)** for securing a panic exit door;
- b) **initiating element (IE)** for initiating the release of electrical locking element in order to exit;
- c) **electrical controlling element (EC)** for supplying, connecting and controlling EL and IE.

This European Standard does not cover any other element of a security system, other than those directly involved in the control of a panic exit.

It does not specify any particular design of devices and only such dimensions as are required to satisfy the Essential Requirements of the CPD are specified.

Panic exit systems covered by this European Standard are for use on hinged or pivoted door leaves, not exceeding 200 kg in mass, 2 500 mm in height and 1 300 mm in width. The requirements of this standard also apply to PES for doors exceeding these values by the use of a specific test door.

The suitability of a panic exit system for use on fire/smoke door assemblies is determined by fire performance tests conducted in addition to the performance tests required by this European Standard. Annex B indicates additional requirements for these products.

This European Standard does not cover electrically controlled emergency exit systems (see WI 0033244).

2 Normative references

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

EN 179:1997, *Building hardware - Emergency exit devices operated by a lever handle or a push pad - Requirements and test methods*

EN 1125:1997, *Building hardware - Panic exit devices operated by a horizontal bar - Requirements and test methods*

EN 1670:1998, *Building hardware - Corrosion Resistance - Requirement and tests methods*

PrEN (WI 0033244), *Building hardware - Electrically controlled emergency exit systems - Requirement and tests methods.*

EN 45001:1989, *General criteria for the operation of testing laboratories*

EN 50081-1:1992, *Electromagnetic compatibility - Generic emission standard - Part 1: Residential, commercial and light industry*

EN 50081-2:1993, *Electromagnetic compatibility - Generic emission standard - Part 2: Industrial environment*

EN 50082-1:1992, *Electromagnetic compatibility - Generic immunity standard - Part 1: Residential, commercial and light industry*

EN 50082-2:1995, *Electromagnetic compatibility - Generic immunity standard - Part 2: Industrial environment*

EN 60068-2-1:1993, *Environmental testing - Part 2: Tests - Tests A: Cold*

EN 60068-2-2:1993, *Basic environmental testing procedures - Part 2: Tests - Tests B: Dry heat*

EN 60068-2-63:1994, *Basic environmental testing procedures - Part 2: Tests - Tests B: Dry heat*

EN 60950:1992, *Safety of information technology equipment, including electrical business equipment*

EN 61000-4-2:1995, *Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 2: Electrostatic discharge immunity test - Basic EMC publication*

IEC 68-2-30:1980, *Basic environmental testing procedures - Test methods - Test Db and guidance: Damp heat, cyclic (12 + 12 - hour cycle)*

3 Definitions and diagrams

3.1 Definitions

For the purpose of this standard, the following definitions apply:

3.1.1

exit device

A mechanically operated device intended for panic exit function or emergency exit function

3.1.1.1

panic exit device

A mechanism for use where panic situations are foreseen, and consisting of a bolt head(s) which engage(s) with a keeper(s) in the surrounding door frame or floor for securing a door when closed. The bolt head(s) can be released by the bar positioned horizontally across the inside face of the door when it is moved anywhere along its effective length in the direction of travel and/or in an arc downwards (see EN 1125).

3.1.1.2

emergency exit device

A mechanism for use where panic situations are not foreseen, and consisting of a bolt head(s) which engage(s) with a keeper(s) in the surrounding door frame or floor for securing a door when closed. The bolt head(s) can be released by the lever handle or the push pad positioned on the inside face of the door when it is moved in a downward direction or in the direction of exit (see EN 179).

3.1.2

electrically controlled exit systems

An electrically controlled system intended for panic exit function or emergency exit function.

3.1.2.1

electrically controlled panic exit system (PES)

A system for use where panic situations are foreseen which enables the electrical control of emergency exit doors by means of electrical locking elements (EL), initiating element (IE) and electrical controlling elements (EC). These separate elements may be inter-connected or may be combined in various assemblies, to provide the required system functions.

3.1.2.2

electrically controlled emergency exit system (EES)

A system for use where panic situations are not foreseen which enables the electrical control of emergency exit doors by means of electrical locking elements (EL), requesting element (RE) and electrical controlling elements (EC). These separate elements may be inter-connected or may be combined in various assemblies, to provide the required system functions (see WI 0033244).

3.1.3

initiating element (IE)

A manually initiated element of a PES that provides an electrical signal to enable an EL to release the door. An IE may be incorporated into a mechanically operated horizontal bar which complies with EN 1125.

3.1.4

electrically locking element (EL)

An electrically operated element of a PES that maintains the door in secured condition. These elements may be electromagnetic, electromechanical or motorised in their operation, and may be incorporated in an initiating element.

3.1.5

electrical controlling element (EC)

An element of a PES which supplies, connects and controls EL and IE. An EC may contain power supplies, selection switches, detection and alarm components and wiring, etc.

3.1.6

bar

The horizontal part of an initiating element of a panic exit system which, when activated, will release the locking element. Activation may be by pushing, touching or sensing.

3.1.7
manual

The operation or initiation of an action, at least by hand or body, and including the option of proximity sensing.

3.1.8
rated supply voltage

The nominal voltage for which the device is intended.

3.1.9
to release

To remove a locking influence, such as disconnecting an electromagnet, withdrawing the bolt of a lock, etc. such that a door may be opened.

3.1.10
immediate release

A time of one second (1 s) or less to release the EL.

3.2 Diagrams

3.2.1 Functional diagrams of typical electrically controlled panic exit systems

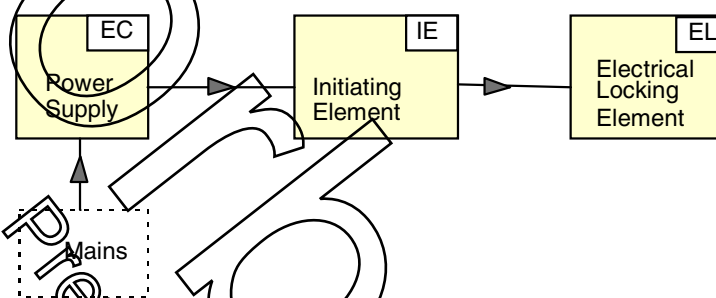


Figure 1 — PES with minimum functions

Bestelformulier

NEN

Stuur naar:

NEN Standards Products & Services
t.a.v. afdeling Klantenservice
Antwoordnummer 10214
2600 WB Delft

NEN Standards Products & Services

Postbus 5059
2600 GB Delft

Vlinderweg 6
2623 AX Delft

T (015) 2 690 390
F (015) 2 690 271

www.nen.nl/normshop

Ja, ik bestel

__ ex. NEN-EN 13633:1999 Ontw. en Hang- en sluitwerk - Elektrisch gestuurde systemen voor vluchtdeursluitingen - Eisen en beproevingsmethoden € 36.24

Wilt u deze norm in PDF-formaat? Deze bestelt u eenvoudig via www.nen.nl/normshop

Gratis e-mailnieuwsbrieven

Wilt u op de hoogte blijven van de laatste ontwikkelingen op het gebied van normen, normalisatie en regelgeving? Neem dan een gratis abonnement op een van onze e-mailnieuwsbrieven. www.nen.nl/nieuwsbrieven

Retourneren

Fax: (015) 2 690 271
E-mail: klantenservice@nen.nl
Post: NEN Standards Products & Services,
t.a.v. afdeling Klantenservice
Antwoordnummer 10214,
2600 WB Delft
(geen postzegel nodig).

Gegevens

Bedrijf / Instelling _____

T.a.v. _____ O M O V

E-mail _____

Klantnummer NEN _____

Uw ordernummer _____ BTW nummer _____

Postbus / Adres _____

Postcode _____ Plaats _____

Telefoon _____ Fax _____

Factuuradres (indien dit afwijkt van bovenstaand adres)

Postbus / Adres _____

Postcode _____ Plaats _____

Datum _____ Handtekening _____

Voorwaarden

- De prijzen zijn geldig tot 31 december 2016, tenzij anders aangegeven.
- Alle prijzen zijn excl. btw, verzend- en handelingskosten en onder voorbehoud bij o.m. ISO- en IEC-normen.
- Bestelt u via de normshop een pdf, dan betaalt u geen handeling en verzendkosten.
- Meer informatie: telefoon (015) 2 690 391, dagelijks van 8.30 tot 17.00 uur.
- Wijzigingen en typfouten in teksten en prijsinformatie voorbehouden.
- U kunt onze algemene voorwaarden terugvinden op: www.nen.nl/leveringsvoorwaarden.