

International Standard



3266

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Eyebolts for general lifting purposes

Anneaux à tige pour applications de levage général

First edition — 1984-11-15

Copyright
Preview

UDC 672.611 : 621.86.06

Ref. No. ISO 3266-1984 (E)

Descriptors : eye screws, dimensions, dimensional tolerances, specifications, marking, load capacity, mechanical properties.

Dit document mag slechts op een stand-alone PC worden geïnstalleerd. Gebruik op een netwerk is alleen toestaan als een aanvullende licentieovereenkomst voor netwerkgebruik met NEN is afgesloten. This document may only be used on a stand-alone PC. Use in a network is only permitted when a supplementary license agreement for us in a network with NEN has been concluded.

ISO 3266-1984 (E)

Price based on 7 pages

Dit document is een voorbeeld van NEN / This document is a preview by NEN



Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 3266 was prepared by Technical Committee ISO/TC 111, *Round steel link chains, lifting hooks and accessories*.

Eyebolts for general lifting purposes

1 Scope and field of application

This International Standard specifies the basic dimensions, material, lifting capacity and conditions of use of lifting eyebolts. These eyebolts may be used for vertical and inclined lifting (see the annex).

Eyebolts with and without recessed collar are included in this International Standard (see figure 1) i.e. :

- a) type 1, eyebolt with recessed collar, suitable for use with chamfered or unchamfered holes;
- b) type 2, eyebolt without recessed collar, suitable for use with chamfered holes only.

This International Standard excludes eyebolts which are not forged in one piece.

The dimensions of the eyes of eyebolts covered by this International Standard are such that they are normally capable of permitting direct engagement with eyehooks of the same lifting capacity (working load limit) for use with grade T (8) chain (see ISO 7597).

In the case of eyehooks for use with grade M (4) chain (see ISO 4779), it may be necessary to use an intermediate component such as a shackle to make the connection.

2 References

ISO 261, *ISO general purpose metric screw threads — General plan.*

ISO 643, *Steels — Micrographic determination of the ferritic or austenitic grain size.*

ISO 965, *ISO general purpose metric screw threads — Tolerances.*

ISO 4779, *Forged steel lifting hooks with point and eye for use with steel chains of grade M (4).¹⁾*

ISO 7597, *Forged steel lifting hooks with point and eye for use with steel chains of grade T (8).¹⁾*

3 Nominal size (Thread dimension, d)

Eyebolts are identified according to their basic thread dimensions. The maximum axial lifting capacity (WLL) for each eyebolt is given in table 2.

4 Dimensions and tolerances

The form and basic dimensions of eyebolts shall be in accordance with figure 1 and table 2. They are formulated on the basis of the available threads listed in ISO 261.

A symmetrical tolerance on ovality of + 5 % is permitted in respect of the internal diameter, E .

A symmetrical tolerance of ± 5 % on the diameter, F , is permitted.

5 Material

The steel shall be produced by the open hearth process, the electrical process or by an oxygen blown process.

In its finished state, as supplied to the eyebolt maker, the steel shall meet the following requirements as determined by a cast or product analysis on the bar or on the finished eyebolt.

It shall be fully killed, shall be suitable for forging and shall be capable of being heat-treated to obtain the mechanical properties required by this International Standard.

The proportions of sulfur and phosphorus shall be limited as shown in table 1.

Table 1 — Proportions of sulfur and phosphorus

| | | | Cast analysis | Product analysis |
|------------------------|------------|---|---------------|------------------|
| Maximum proportions of | sulfur | % | 0,045 | 0,050 |
| | phosphorus | % | 0,040 | 0,045 |

1) At present at the stage of draft.

The steel shall be made in conformity with a suitable deoxidization practice in order to obtain an austenitic grain size of 5 or finer when tested in accordance with ISO 643.

This could be accomplished, for example, by ensuring that it contains sufficient aluminium or equivalent element to permit the manufacture of eyebolts stabilized against strain-age embrittlement. A minimum of 0,02 % of metallic aluminium is quoted for guidance.

Within the above limitations or as otherwise agreed with the purchaser, it is the responsibility of the eyebolt maker to select the steel so that the finished eyebolt, suitably heat-treated, meets the mechanical properties required by this International Standard.

6 Manufacture

Each eyebolt, including the shank, shall be forged in one piece.

7 Machining

The eyebolts shall be machined to ensure that :

- a) the threads of the shanks comply with ISO 261. Unless otherwise specified the coarse series thread form of ISO 261 shall be used and the tolerance of the thread shall be to class 8 g of ISO 965;
- b) dimension $d_{g,max}$ equals the maximum minor diameter of the thread and $d_{g,min}$ equals the minimum minor diameter of the thread minus 0,3 mm;
- c) the machined face of the collar and the axis of the threaded shank are at right angles, subject to a tolerance of 30' ;
- d) the axes of the cylindrical part of the collar and the threaded shank are the same.

8 Mechanical properties

8.1 Minimum axial breaking force

The minimum axial breaking force of eyebolts of each specified working load limit shall be as given in table 3 (column 4).

8.2 Deformation

NOTE — If tests for deformation are carried out, the force shall be applied by exerting an in-line pull between the threaded shank and the eye using a freely rotating round section pin of diameter not exceeding 50 % of the eye diameter. The force should be applied steadily until the specified proof force is reached and gradually reduced to zero.

In the case of eyebolts in inclined loading the force is applied at an angle of 45° to their axes, such that the axial load on the two eyebolts is equal to the value indicated in table 4 (column 4).

8.2.1 Deformation in axial loading

Each eyebolt shall be capable of withstanding the axial force specified in table 3 (column 3) without permanent deformation exceeding 0,5 % of the external diameter of the eye, and without permanent deformation of the shank.

8.2.2 Deformation in inclined loading

Eyebolts when used in pairs shall be capable of sustaining the force specified in table 4 (column 4), when loaded at 45° to their axes, without permanent deformation exceeding 0,5 % of the external diameter of the eye, and without permanent deformation of the shank.

NOTE — National regulations may impose certain requirements regarding usage in non-axial loading.

8.3 Maximum lifting capacities

8.3.1 Capacity in axial loading

The maximum lifting capacity in axial loading (WLL) shall be as specified in table 3 (column 2).

8.3.2 Capacity in inclined loading

The maximum lifting capacity in non-axial loading (C), for a pair of eyebolts, when the angle between sling branches and the vertical is less than or equal to 45°, shall be as specified in table 4 (column 3).

9 Proof loading

When it is required by the purchaser or is necessary to comply with statutory regulations, each eyebolt after manufacture and subsequent heat treatment shall be subjected to an axial proof force as specified in table 3 (column 3).

After removal of the proof force, each eyebolt shall be examined by a competent person and shall be accepted only if found free from visible flaw or defect.

NOTE — The force shall be applied by exerting an in-line pull between the threaded shank and the eye using a freely rotating round section pin of diameter not exceeding 50 % of the eye diameter. The force should be applied steadily until the specified proof force is reached and gradually reduced to zero.

10 Identification marking

Each eyebolt shall be legibly and permanently identified in the zone bounded by the shoulder and the horizontal axis of the eye with the following markings:

- a) such marks or symbols as will allow identification with the manufacturer's certificate;
- b) nominal size, i.e. thread dimension (see column 1 of table 2);
- c) maximum axial lifting capacity (WLL) in general service (see column 2 of table 2).

11 Additional tests


If the purchaser requires tests or chemical analysis of the material, or any additional tests on the finished eyebolts, these requirements shall be clearly stated in the enquiry and order and, if so desired, the samples shall be selected by a person representing or approved by the purchaser.

12 Manufacturer's certificate

When it is required by the purchaser or is necessary to comply with statutory regulations, the manufacturer shall provide a certificate with each consignment of eyebolts giving the following information :

- a) nominal size, i.e. thread dimension (see clause 4);
- b) proof force applied (see clause 9);
- c) maximum axial lifting capacity (WLL) (see table 2);
- d) manufacturer's identification.

Orbeye.nl
Preview

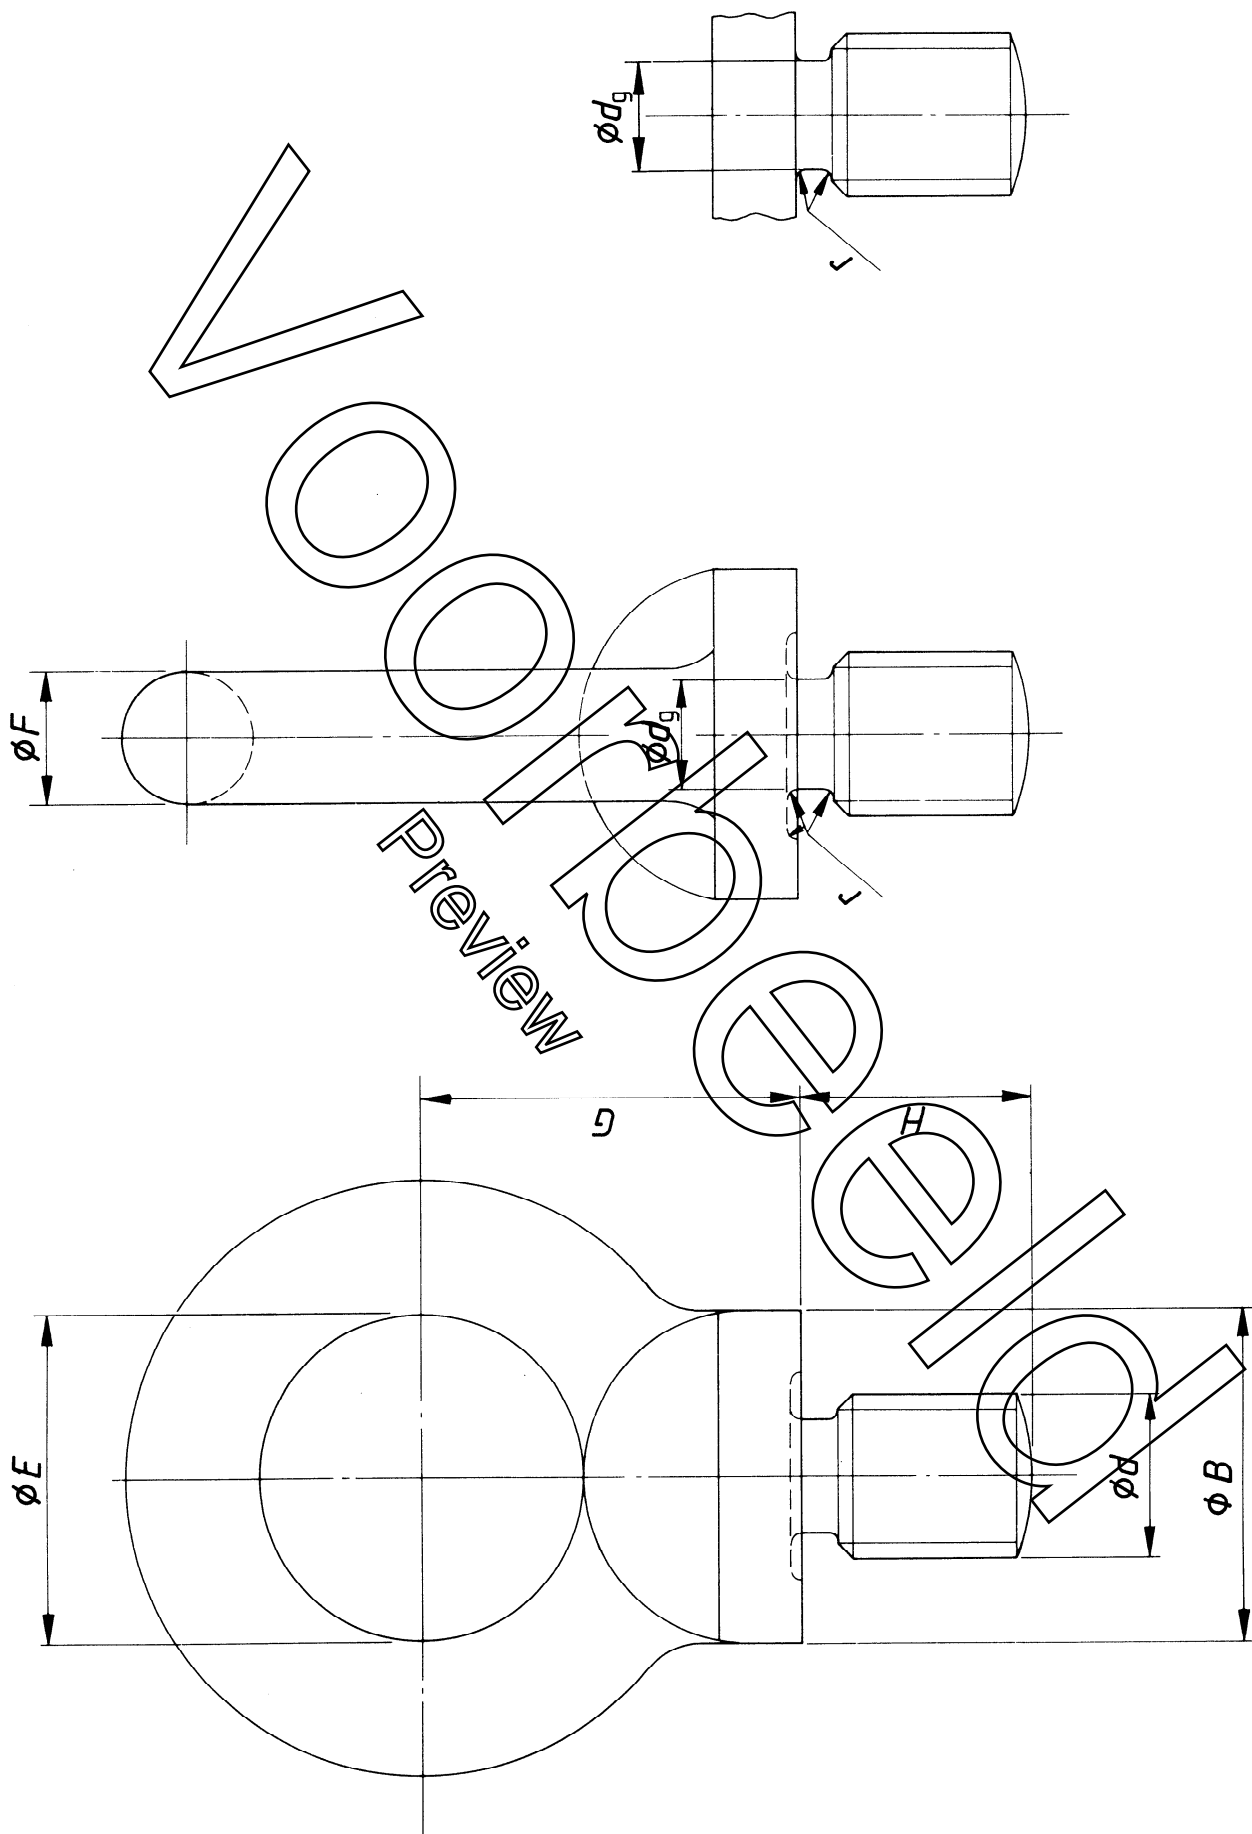

Type 1, recessed collar

Type 2, non-recessed collar

NOTE — These drawings illustrate the specified dimensions only and not the actual form of the eyebolt which is left to the manufacturer's discretion.

Figure 1 — Eyebolts showing recessed and non-recessed collars

Bestelformulier

NEN

Stuur naar:

NEN Standards Products & Services
t.a.v. afdeling Klantenservice
Antwoordnummer 10214
2600 WB Delft

NEN Standards Products & Services

Postbus 5059
2600 GB Delft

Vlinderweg 6
2623 AX Delft

T (015) 2 690 390
F (015) 2 690 271

www.nen.nl/normshop

Ja, ik bestel

___ ex. ISO 3266:1984 en Eyebolts for general lifting purposes

€ 48.19

Wilt u deze norm in PDF-formaat? Deze bestelt u eenvoudig via www.nen.nl/normshop

Gratis e-mailnieuwsbrieven

Wilt u op de hoogte blijven van de laatste ontwikkelingen op het gebied van normen, normalisatie en regelgeving? Neem dan een gratis abonnement op een van onze e-mailnieuwsbrieven. www.nen.nl/nieuwsbrieven

Retourneren

Fax: (015) 2 690 271
E-mail: klantenservice@nen.nl
Post: NEN Standards Products & Services,
t.a.v. afdeling Klantenservice
Antwoordnummer 10214,
2600 WB Delft
(geen postzegel nodig).

Gegevens

Bedrijf / Instelling

T.a.v. O M O V

E-mail

Klantnummer NEN

Uw ordernummer BTW nummer

Postbus / Adres

Postcode Plaats

Telefoon Fax

Factuuradres (indien dit afwijkt van bovenstaand adres)

Postbus / Adres

Postcode Plaats

Datum Handtekening

Voorwaarden

- De prijzen zijn geldig tot 31 december 2016, tenzij anders aangegeven.
- Alle prijzen zijn excl. btw, verzend- en handelingskosten en onder voorbehoud bij o.m. ISO- en IEC-normen.
- Bestelt u via de normshop een pdf, dan betaalt u geen handeling en verzendkosten.
- Meer informatie: telefoon (015) 2 690 391, dagelijks van 8.30 tot 17.00 uur.
- Wijzigingen en typfouten in teksten en prijsinformatie voorbehouden.
- U kunt onze algemene voorwaarden terugvinden op: www.nen.nl/leveringsvoorwaarden.