

Als Nederlandse norm is aanvaard:
 - EN 13445-3:2002, IDT

Normcommissie 341 032 "Drukapparaatruur"

Apart from exceptions provided by the law, nothing from this publication may be duplicated and/or published by means of photocopy, microfilm, storage in computer files or otherwise, which also applies to full or partial processing, without the written consent of the Netherlands Standardization Institute.

The Netherlands Standardization Institute shall, with the exclusion of any other beneficiary, collect payments owed by third parties for duplication and/or act in and out of law, where this authority is not transferred or falls by right to the Reproduction Rights Foundation.


Auteursrecht voorbehouden. Behoudens uitzondering door de wet gesteld mag zonder schriftelijke toestemming van het Nederlands Normalisatie-instituut niets uit deze uitgave worden verveelvoudigd en/of openbaar gemaakt door middel van fotokopie, microfilm, opslag in computerbestanden of anderszins, hetgeen ook van toepassing is op gehele of gedeeltelijke bewerking.

Het Nederlands Normalisatie-instituut is met uitsluiting van ieder ander gerechtigd de door derden verschuldigde vergoedingen voor verveelvoudiging te innen en/of daartoe in en buiten rechte op te treden, voor zover deze bevoegdheid niet is overgedragen c.q. rechsens toekomt aan de Stichting Reprorecht.

Although the utmost care has been taken with this publication, errors and omissions cannot be entirely excluded. The Netherlands Standardization Institute and/or the members of the committees therefore accept no liability, not even for direct or indirect damage, occurring due to or in relation with the application of publications issued by the Netherlands Standardization Institute.

Hoewel bij deze uitgave de uiterste zorg is nagestreefd, kunnen fouten en onvolledigheden niet geheel worden uitgesloten. Het Nederlands Normalisatie-instituut en/of de leden van de commissies aanvaarden derhalve geen enkele aansprakelijkheid, ook niet voor directe of indirecte schade, ontstaan door of verband houdend met toepassing van door het Nederlands Normalisatie-instituut gepubliceerde uitgaven.

Dit document mag slechts op een stand-alone PC worden geïnstalleerd. Gebruik op een netwerk is alleen toegestaan als een aanvullende licentieovereenkomst voor netwerkgebruik met NEN is afgesloten. This document may only be used on a stand-alone PC. Use in a network is only permitted when a supplementary license agreement for us in a network with NEN has been concluded.

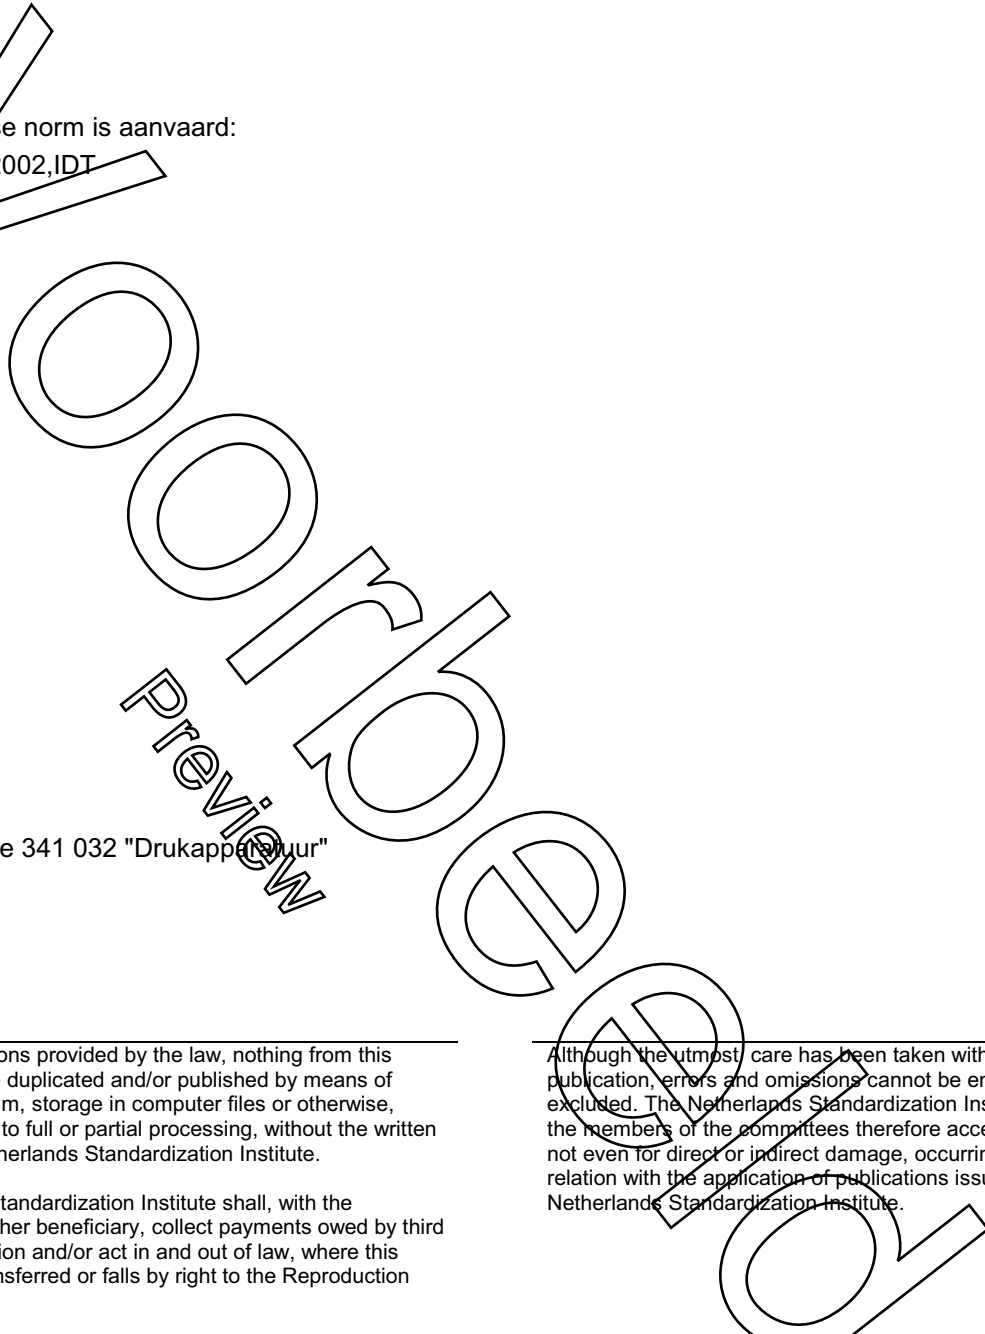

Nederlands voorwoord

Voor de in deze norm vermelde normatieve verwijzingen bestaan in Nederland de volgende equivalenten:

<u>vermelde norm</u>	<u>Nederlandse norm</u>	<u>titel</u>
EN 286-2:1992	NEN-EN 286-2:1993	Eenvoudige, niet aan vlambelasting blootgestelde drukvaten voor lucht of stikstof - Deel 2: Drukvaten voor remlucht- en hulpsystemen voor motorvoertuigen en hun aanhangwagens (en)
EN 288-8:1995	NEN-EN 288-8:1995	Het beschrijven en kwalificeren van lasprocedures voor metallische materialen - Deel 8: Goedkeuring door middel van een lasproef voor het begin van de productie (en,nl)
prEN 764-1:2001	NEN-EN 764-1:2001 Ontw.	Drukapparatuur - Terminologie - temperatuur, volume, nominale afmetingen (en)
EN 764-2:2002	NEN-EN 764-2	Drukapparatuur - Deel 2: Hoeveelheden, symbolen en eenheden (en)
EN 764-3:2002	NEN-EN 764-3	Drukapparatuur - Terminologie - Deel 3: Definities van betrokken partijen (en)
EN 1092:series	NEN-EN 1092:reeks	Flenzen en hun verbindingen (en)
EN 1591-1:2001	NEN-EN 1591-1:2001	Flenzen en hun verbindingen - Ontwerpregels voor flensverbindingen met ronde flenzen en pakkingen - Deel 1: Berekeningsmethode (en)
EN 1708-1:1999	NEN-EN 1708-1:1999	Lassen - Details van lasverbindingen in staal - Deel 1: Onder druk staande constructiedelen (en)
ISO 261:1998	NEN-ISO 261:1999	ISO-metrische schroefdraad voor algemene toepassing - Algemeen overzicht (en,nl)
EN ISO 4014	NEN-EN-ISO 4014	Zeskantbouten - Productklassen A en B (en)
EN ISO 4016	NEN-EN-ISO 4016	Zeskantbouten - Productklasse C (en)

ICS 23.020.30

English version

Unfired pressure vessels - Part 3: Design

Réceptacles sous pression non soumis à la flamme - Partie
3: Conception

Unbefeuerte Druckbehälter - Teil 3: Konstruktion

This European Standard was approved by CEN on 23 May 2002.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

Preview



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

	Foreword.....	5
1	Scope	6
2	Normative references	6
3	Terms and definitions.....	6
4	Symbols and abbreviations	8
5	Basic design criteria.....	10
5.1	General.....	10
5.2	Corrosion, erosion and protection.....	10
5.3	Load cases.....	12
5.4	Design methods	15
5.5	Thickness calculations (DBF).....	17
5.6	Weld joint coefficient	18
5.7	Design requirements of welded joints	19
6	Maximum allowed values of the nominal design stress for pressure parts.....	21
6.1	General.....	21
6.2	Wrought and forged steels, other than austenitic, with a minimum rupture elongation, as given in the relevant technical specification for the material, below 30 %	22
6.3	Wrought and forged austenitic steels with a minimum rupture elongation, as given in the relevant technical specification for the material, 30 % to 35 %	23
6.4	Wrought and forged austenitic steels with a minimum rupture elongation, as given in the relevant technical specification for the material, not less than 35 %.....	23
6.5	Cast steels	24
7	Shells under internal pressure	26
7.1	Purpose.....	26
7.2	Specific definitions	26
7.3	Specific symbols and abbreviations.....	26
7.4	Cylindrical and spherical shells.....	27
7.5	Dished ends.....	28
7.6	Cones and conical ends.....	33
7.7	Nozzles which encroach into the knuckle region.....	42
8	Shells under external pressure	47
8.1	Purpose.....	47
8.2	Specific definitions	47
8.3	Specific symbols and definitions.....	48
8.4	General.....	51
8.5	Cylindrical shells	52
8.6	Conical shell.....	73
8.7	Spherical shells.....	80
8.8	Vessel ends	81
9	Openings in shells	82
9.1	Purpose.....	82
9.2	Specific definitions	82
9.3	Specific symbols and abbreviations.....	83
9.4	General.....	88
9.5	Isolated openings.....	98
9.6	Multiple openings	109
9.7	Openings close to a shell discontinuity	120
10	Flat ends	128
10.1	Purpose	128
10.2	Specific definitions	128
10.3	Specific symbols and abbreviations.....	129
10.4	Unpierced circular flat ends welded to cylindrical shells.....	130
10.5	Unpierced bolted circular flat ends.....	137
10.6	Pierced circular flat ends	139

10.7	Flat ends of non-circular or annular shape.....	143
11	Flanges	148
11.1	Purpose.....	148
11.2	Specific definitions.....	148
11.3	Specific symbols and abbreviations.....	149
11.4	General.....	150
11.5	Narrow face gasketed flanges.....	154
11.6	Full face flanges with soft ring type gaskets.....	169
11.7	Seal welded flanges.....	172
11.8	Reverse narrow face flanges.....	173
11.9	Reverse full face flanges.....	175
11.10	Full face flanges with metal to metal contact.....	179
12	Bolted domed ends.....	182
12.1	Purpose.....	182
12.2	Specific definitions.....	182
12.3	Specific symbols and abbreviations.....	182
12.4	General.....	182
12.5	Bolted domed ends with narrow face gaskets.....	182
12.6	Bolted domed ends with full face joints.....	184
13	Heat Exchanger Tubesheets.....	187
13.1	Purpose.....	187
13.2	Specific definitions.....	187
13.3	Specific symbols and abbreviations.....	188
13.4	U-tube tubesheet heat exchangers.....	190
13.5	Fixed tubesheet heat exchangers.....	205
13.6	Floating tubesheet heat exchangers.....	234
13.7	Tubesheet characteristic.....	253
13.8	Maximum permissible tube to tubesheet joint stress.....	260
13.9	Maximum permissible longitudinal compressive stress for tubes.....	261
13.10	Design of tubesheet flange extension with a narrow face gasket.....	264
13.11	Design of tubesheet flange extension with a full face gasket.....	269
13.12	Special tube-to-tubesheet welded joints.....	272
14	Expansion bellows.....	275
14.1	Purpose.....	275
14.2	Specific definitions.....	275
14.3	Specific symbols and abbreviations.....	277
14.4	Conditions of applicability.....	278
14.5	U-shaped unreinforced bellows.....	281
14.6	U-shaped reinforced bellows.....	298
14.7	Toroidal bellows.....	298
14.8	Inspection and testing.....	298
14.9	Specific design fatigue curves.....	300
14.10	Bellows subjected to axial, lateral or angular displacements.....	300
15	Pressure vessels of rectangular section.....	306
15.1	Purpose.....	306
15.2	Specific definitions.....	306
15.3	Specific symbols and abbreviations.....	306
15.4	General.....	308
15.5	Unreinforced vessels.....	308
15.6	Reinforced vessels.....	314
15.7	Openings.....	323
16	Additional non-pressure loads.....	325
16.1	Purpose.....	325
16.2	Specific definitions.....	325
16.3	Specific symbols and abbreviations.....	326
16.4	Local loads on nozzles in spherical shells.....	328
16.5	Local loads on nozzles in cylindrical shells.....	338
16.6	Line loads.....	349
16.7	Lifting lugs.....	356

16.8	Horizontal vessels on saddle supports	360
16.9	Horizontal vessels on ring supports.....	374
16.10	Vertical vessels on bracket supports	379
16.11	Vertical vessels with supporting legs.....	384
16.12	Vertical vessels with skirts	387
16.13	Vertical vessels with ring supports	404
16.14	Global loads.....	415
17	Simplified assessment of fatigue life.....	421
17.1	Purpose.....	421
17.2	Specific definitions	421
17.3	Specific symbols and abbreviations.....	423
17.4	Conditions of applicability	424
17.5	General.....	425
17.6	Determination of allowable number of pressure cycles.....	425
17.7	Assessment rule.....	451
17.8	Design and manufacture.....	451
17.9	Testing	452
18	Detailed assessment of fatigue life.....	453
18.1	Purpose.....	453
18.2	Specific definitions	453
18.3	Specific symbols and abbreviations.....	456
18.4	Limitations	459
18.5	General.....	460
18.6	Welded material.....	462
18.7	Unwelded components and bolts.....	467
18.8	Elastic-plastic conditions.....	470
18.9	Fatigue action.....	472
18.10	Fatigue strength of welded components.....	475
18.11	Fatigue strength of unwelded components	497
18.12	Fatigue strength of steel bolts.....	503
Annex A	(normative) Design requirements for pressure bearing welds.....	505
Annex B	(informative) Design by Analysis - direct route	529
Annex C	(informative) Design by Analysis - method based on stress categories	550
Annex D	(informative) Verification of the shape of vessels subject to external pressure.....	569
Annex E	(normative) Procedure for calculating the departure from the true circle of cylinders and cones.....	576
Annex F	(normative) Allowable external pressure for vessels outside circularity tolerance	579
Annex G	(normative) Alternative design rules for flanges and gasketed flange connections.....	581
Annex H	(informative) Table H-1 Gasket factors <i>m</i> and <i>y</i>	631
Annex I	(informative) Additional information on heat exchanger tubesheet design.....	634
Annex J	(normative) Alternative methods for the design of heat exchanger tubesheets.....	638
Annex K	(informative) Additional information on expansion bellows design.....	674
Annex L	(informative) Basis for design rules related to non-pressure loads	681
Annex M	(informative) Measures to be adopted in service	683
Annex N	(informative) Bibliography to Clause 18	685
Annex O	(informative) Physical properties of steels	686
Annex P	(normative) Classification of weld details to be assessed using principal stresses	693
Annex Q	(normative) Simplified procedure for fatigue assessment of unwelded zones.....	706
Annex ZA	(informative) Clauses of this European Standard addressing essential requirements or other provisions of the EU Directives.....	707

Foreword

This document (EN 13445-3:2002) has been prepared by Technical Committee CEN/TC 54, "Unfired pressure vessels", the secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2002, and conflicting national standards shall be withdrawn at the latest by November 2002.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive 97/23/EC.

For relationship with EU Directive(s), see informative Annex ZA, which is an integral part of this document.

In this standard the Annexes A, E, F, G, H, J, L, P and Q are normative and the Annexes B, C, D, I, K, M, N and O are informative.

This European Standard consists of the following Parts:

- *Part 1: General.*
- *Part 2: Materials.*
- *Part 3: Design.*
- *Part 4: Fabrication.*
- *Part 5: Inspection and Testing.*
- *Part 6: Requirements for the design and fabrication of pressure vessels and pressure parts constructed from spheroidal graphite cast iron.*
- *Part 7: Guidance on the use of conformity assessment procedures.*

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

1 Scope

This Part of this European Standard specifies requirements for the design of unfired pressure vessels covered by EN 13445-1:2002 and constructed of steels in accordance with EN 13445-2:2002.

EN 13445-5:2002, Annex C specifies requirements for the design of access and inspection openings, closing mechanisms and special locking elements.

2 Normative references

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies (including amendments).

EN 286-2:1992, *Simple unfired pressure vessels designed to contain air or nitrogen — Part 2: Pressure vessels for air braking and auxiliary systems for motor vehicles and their trailers.*

EN 288-8:1995, *Specification and approval of welding procedures for metallic materials — Part 8: Approval by a pre-production welding test.*

prEN 764-1:2001, *Pressure equipment — Terminology — Part 1: Pressure, temperature, volume, nominal size*

EN 764-2:2002, *Pressure equipment — Part 2: Quantities, symbols and units*

EN 764-3:2002, *Pressure equipment — Part 3: Definition of parties involved*

EN 1092, *Flanges and their joints. Circular flanges for pipes, valves, fittings and accessories, PN-designated.*

EN 1591-1:2001, *Flanges and their joints. Design rules for gasketed circular flange connections — Calculation method.*

EN 1708-1:1999, *Welding - Basic weld joint details in steel — Part 1: Pressurized components*

ISO 261:1998, *ISO general purpose metric screw threads — General plan.*

EN ISO 4014, *Hexagon head bolts — Product grades A and B (ISO 4014:1999).*

EN ISO 4016, *Hexagon head bolts — Product grade C (ISO 4016:1999).*

3 Terms and definitions

For the purposes of this Part of this European Standard, the terms and definitions given in EN 13445-1:2002, EN 13445-2:2002 and the following apply:

3.1 action

imposed thermo-mechanical influence which causes stress and/or strain in a structure, e.g. an imposed pressure, force, temperature

3.2 analysis thickness

effective thickness available to resist the loadings in corroded condition

3.3

assumed thickness

thickness assumed by the designer between the minimum required shell thickness e and the shell analysis thickness e_a

3.4

calculation pressure

differential pressure used for the purpose of calculations of a component

[prEN 764-1:2001]

3.5

calculation temperature

temperature used for the purpose of calculations of a component

[prEN 764-1:2001]

3.6

chamber

single fluid space within a unit of pressure equipment

[prEN 764-1:2001]

3.7

component

part of pressure equipment or assembly which can be considered as an individual item for the calculation

[prEN 764-1:2001]

3.8

cryogenic applications

applications involving liquefied gases at low temperature

3.9

design pressure

pressure at the top of each chamber of the pressure equipment chosen for the derivation of the calculation pressure of each component

[prEN 764-1:2001]NOTE Any other location may be specified.

3.10

design temperature

temperature chosen for the derivation of the calculation temperature of each component

[prEN 764-1:2001]

3.11

differential pressure

pressure for which the algebraic value is equal to the difference of pressure on both sides of a component

[prEN 764-1:2001]

3.12

governing weld joint

main full penetration butt joint the design of which, as a result of membrane stresses, governs the thickness of the component

- 3.13**
load case
combination of coincident actions
- 3.14**
main joint
weld joint assembling main pressure bearing parts
- 3.15**
maximum permissible pressure
pressure obtained with the analysis thickness at the calculation temperature for a given component from the design by formulae
- 3.16**
minimum possible fabrication thickness
minimum possible thickness after fabrication
- 3.17**
nominal design stress
stress value to be used in the formulae for the calculation of pressure components
- 3.18**
nominal thickness
thickness as specified on the drawings
- 3.19**
test pressure
pressure at which the equipment is subjected for test purposes
[prEN 764-1:2001]
- 3.20**
test temperature
temperature at which the pressure test of the pressure equipment is carried out
[prEN 764-1:2001]
- 3.21**
volume
internal volume of a chamber, including the volume of nozzles to the first connection (flange, coupling, weld) and excluding the volume of internal permanent parts (e.g. baffles, agitators)
- NOTE EN 13445-1:2002 and EN 13445-2:2002 have adopted terminology, symbols and definitions of prEN 764-1:2001, EN 764-2:2002:2002 and EN 764-3:2002:2002.

4 Symbols and abbreviations

For the purposes of this Part of this European Standard, the general symbols and abbreviations shall be in accordance with EN 13445-1:2002, EN 13445-2:2002 and Table 4-1:

Table 4-1 — Symbols, quantities and units ^c

Symbol	Quantity	Unit
e	required thickness	mm
e_n	nominal thickness	mm
e_{min}	minimum possible fabrication thickness	mm
e_a	analysis thickness	mm
c	corrosion or erosion allowance	mm
f	nominal design stress	MPa or N/mm ²
f_d	maximum value of the nominal design stress for normal operating load cases	MPa or N/mm ²
f_{exp}	maximum value of the nominal design stress for exceptional load cases	MPa or N/mm ²
f_{test}	maximum value of the nominal design stress for testing load cases	MPa or N/mm ²
n_{eq}	number of equivalent full pressure cycles (see 5.4.2)	-
P	calculation pressure	MPa or N/mm ² ^a
P_d	design pressure	MPa or N/mm ² ^a
P_{max}	maximum permissible pressure	MPa or N/mm ² ^a
PS, P_s	maximum allowable pressure	MPa or N/mm ² ^a
P_{test}	test pressure	MPa or N/mm ² ^a
R_{eH}	minimum upper yield strength	MPa or N/mm ²
R_m	minimum tensile strength	MPa or N/mm ²
$R_{m/t}$	minimum tensile strength at temperature t in °C	MPa or N/mm ²
$R_{p0,2}$	minimum 0,2 % proof strength	MPa or N/mm ²
$R_{p0,2/t}$	minimum 0,2 % proof strength at temperature t in °C	MPa or N/mm ²
$R_{p1,0}$	minimum 1,0 % proof strength	MPa or N/mm ²
$R_{p1,0/t}$	minimum 1,0 % proof strength at temperature t in °C	MPa or N/mm ²
t	calculation temperature	°C
t_d	design temperature	°C
t_{test}	test temperature	°C
TS_{max}, TS_{min}	maximum/minimum allowable temperatures	°C
V	volume of a vessel (or a chamber)	mm ³ ^b
z	weld joint coefficient	—
ν	Poisson's ratio	—

^a MPa or N/mm² for calculation purpose only, otherwise the unit may be bar (1 MPa = 1 N/mm²).

^b mm³ for calculation purpose only, otherwise the unit should be litre.

^c Formulae used in this standard are dimensional.

5 Basic design criteria

5.1 General

The requirements in clause 5 shall apply when:

- a) the materials and welds are not subject to localized corrosion in the presence of products which the vessel is to contain; and
- b) the design is outside the creep range. Unless otherwise specified in the relevant clauses, design requirements are applicable up to 370 °C for ferritic steels and 425 °C for austenitic steels.

NOTE This will be changed when the section on creep design is prepared.

5.2 Corrosion, erosion and protection

5.2.1 General

Whenever the word "corrosion" is used in this standard it shall be taken to mean corrosion, oxidation, scaling, abrasion, erosion and all other forms of wastage.

NOTE 1 Stress corrosion cracking may occur under certain conditions of temperature and environment. A corrosion allowance is not an appropriate way of dealing with stress corrosion. Under such conditions, consideration shall be given to the materials used and the residual stresses in the fabricated vessel.

NOTE 2 It is impossible to lay down definite precautionary guidelines to safeguard against the effects of corrosion owing to the complex nature of corrosion itself, which may occur in many forms, including but not limited to the following:

- chemical attack where the metal is dissolved by the reagents. It may be general over the whole surface or localized (causing pitting) or a combination of the two;
- rusting caused by the combined action of moisture and air;
- erosion corrosion where a reagent otherwise innocuous flows over the surface at velocity greater than some critical value;
- high temperature oxidation (scaling).

Consideration should be given to the effect which corrosion (both internal and external) may have upon the useful life of the vessel. When in doubt, corrosion tests should be undertaken. These should be carried out on the actual metal (including welds or combination of metals) under exposure to the actual chemicals used in service. Corrosion tests should be continued for a sufficiently long period to determine the trend of any change in the rate of corrosion with respect to time.

NOTE 3 It is very dangerous to assume that the major constituent of a mixture of chemicals is the active agent, as in many cases small traces of a substance can exert an accelerating or inhibiting effect out of all proportion to the amount present. Fluid temperatures and velocities from corrosion test data should be equivalent to those met in operation.

5.2.2 Additional thickness to allow for corrosion

In all cases where reduction of the wall thickness is possible as a result of surface corrosion or erosion, of one or other of the surfaces, caused by the products contained in the vessel or by the atmosphere, a corresponding additional thickness sufficient for the design life of the vessel components shall be provided. The value shall be stated on the design drawing of the vessel. The amounts adopted shall be adequate to cover the total amount of corrosion expected on either or both surfaces of the vessel.

A corrosion allowance is not required when corrosion can be excluded, either because the materials, including the welds, used for the pressure vessel walls are corrosion resistant relative to the contents and the loading or are reliably protected (see 5.2.4).


No corrosion allowance is required for heat exchanger tubes and other parts in similar heat exchanger duty, unless a specific corrosive environment requires one.

This corrosion allowance does not ensure safety against the risk of deep corrosion or stress corrosion cracking, in these cases a change of material, cladding, etc. is the appropriate means.

Where deep pitting may occur, suitably resistant materials shall be selected, or protection applied to the surfaces.

5.2.3 Inter-relation of thickness definitions

The inter-relation of the various definitions of thickness is shown in Figure 3-1.

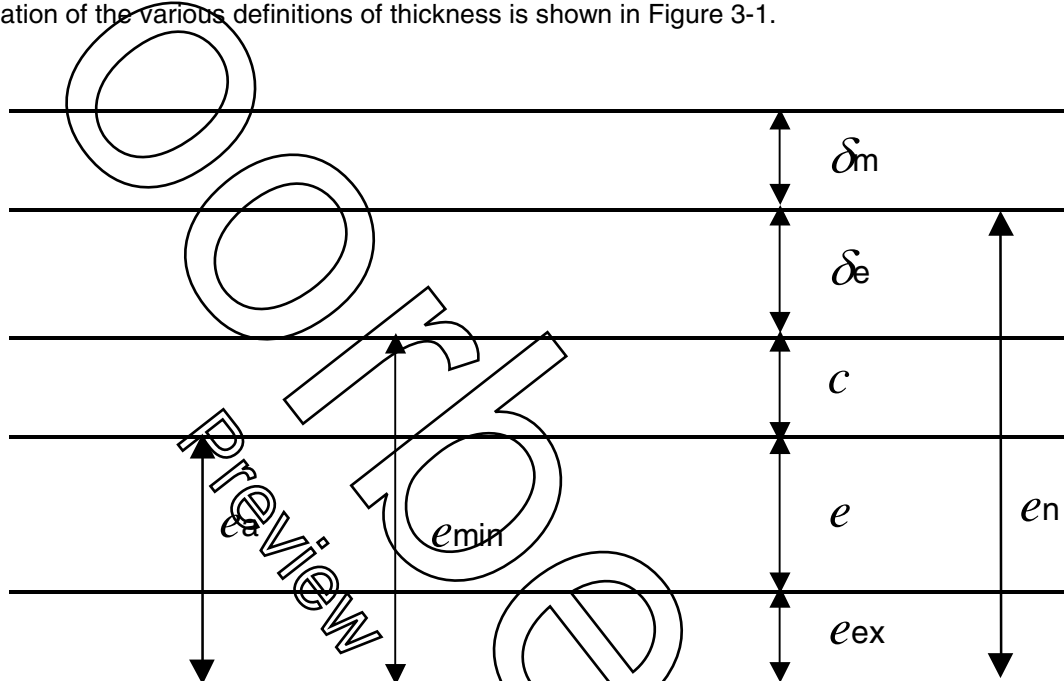

Key

- e is the required thickness;
- e_n is the nominal thickness;
- e_{min} is the minimum possible fabrication thickness ($e_{min} = e_n - \delta_e$);
- e_a is the analysis thickness ($e_a = e_{min} - c$);
- c is the corrosion or erosion allowance;
- δ_e is the absolute value of the possible negative tolerance on the nominal thickness (e.g. taken from the material standards);
- δ_m is the allowance for possible thinning during manufacturing process;
- e_{ex} is the extra thickness to make up to the nominal thickness.

Figure 3-1 — Relationship of thickness definitions

5.2.4 Linings and coatings

Only completely impervious, sufficiently thick and chemically stable layers with an average life not less than that of the pressure vessel shall be considered to be reliable protection against corrosion, but thin layers (like painting, electroplating, tinning, etc.) and coatings which are known to have to be renewed during the lifetime of the pressure vessel components shall not be used. For plastic coatings the suitability shall be justified, taking into account, among other factors, the risk of diffusion. The test of corrosion protection outlined in EN 286-2:1992 is not considered to be adequate for the pressure vessels covered by this standard.

Vessels may be fully or partially lined (or coated) with corrosion-resistant material. Linings should be integrally bonded to the vessel base metal. Loose or intermittently attached linings may be used taking the following into consideration:

- sufficient ductility of the lining to accommodate any strain likely to be imposed on it during service and testing conditions, differential thermal expansion being taken into consideration;
- for non-metallic coatings, the surface finish of the base material.

Provided contact between the corrosive agent and the vessel base material is excluded, no corrosion allowance needs be provided against internal wastage of the base material.

5.2.5 Wear plates

Where severe conditions of erosion and abrasion arise, local protective or wear plates shall be fitted directly in the path of the impinging material.

5.3 Load cases

5.3.1 Actions

In the design of a vessel the following actions shall be taken into account, where relevant:

- a) internal and/or external pressure;
- b) maximum static head of contained fluid under operating conditions;
- c) weight of the vessel;
- d) maximum weight of contents under operating conditions;
- e) weight of water under hydraulic pressure test conditions;
- f) wind, snow and ice loading;
- g) earthquake loading;
- h) other loads supported by or reacting on the vessel, including loads during transport and installation.

ALTIJD DE ACTUELE NORM IN UW BEZIT HEBBEN?

Nooit meer zoeken in de systemen en uzelf de vraag stellen:
“Is NEN-EN 13445-3:2002 en de laatste versie?”™

Via het digitale platform NEN Connect heeft u altijd toegang tot de meest actuele versie van deze norm. Vervallen versies blijven ook beschikbaar. **U en uw collega's** kunnen de norm via NEN Connect makkelijk raadplagen, online en offline.

Kies voor slimmer werken en bekijk onze mogelijkheden op www.nenconnect.nl.

Heeft u vragen?

Onze Klantenservice is bereikbaar maandag tot en met vrijdag, van 8.30 tot 17.00 uur.

Telefoon: 015 2 690 391

E-mail: klantenservice@nen.nl

