

norm

NEN-ISO 4649 (en)

Rubber, ge vulcaniseerd of thermoplastisch - Bepaling van de slijtweerstand met gebruik van een roterende cilinder (ISO 4649:2002, IDT)

Rubber, vulcanized or thermoplastic - Determination of abrasion resistance using a rotating cylindrical drum device (ISO 4649:2002, IDT)

mei 2002
ICS 83.060

Als Nederlandse norm is aanvaard:

- ISO 4649:2002, IDT

Normcommissie 310 045 "Rubber"

Apart from exceptions provided by the law, nothing from this publication may be duplicated and/or published by means of photocopy, microfilm, storage in computer files or otherwise, which also applies to full or partial processing, without the written consent of the Netherlands Standardization Institute.

The Netherlands Standardization Institute shall, with the exclusion of any other beneficiary, collect payments owed by third parties for duplication and/or act in and out of law, where this authority is not transferred or falls by right to the Reproduction Rights Foundation.

Auteursrecht voorbehouden. Behoudens uitzondering door de wet gesteld mag zonder schriftelijke toestemming van het Nederlands Normalisatie-instituut niets uit deze uitgave worden verveelvoudigd en/of openbaar gemaakt door middel van fotokopie, microfilm, opslag in computerbestanden of anderszins, hetgeen ook van toepassing is op gehele of gedeeltelijke bewerking.

Het Nederlands Normalisatie-instituut is met uitsluiting van ieder ander gerechtigd de door derden verschuldigde vergoedingen voor verveelvoudiging te innen en/of daartoe in en buiten rechte op te treden, voor zover deze bevoegdheid niet is overgedragen c.q. rechsens toekomt aan de Stichting Reprorecht.

Although the utmost care has been taken with this publication, errors and omissions cannot be entirely excluded. The Netherlands Standardization Institute and/or the members of the committees therefore accept no liability, not even for direct or indirect damage, occurring due to or in relation with the application of publications issued by the Netherlands Standardization Institute.

Hoewel bij deze uitgave de uiterste zorg is nagestreefd, kunnen fouten en onvolledigheden niet geheel worden uitgesloten. Het Nederlands Normalisatie-instituut en/of de leden van de commissies aanvaarden derhalve geen enkele aansprakelijkheid, ook niet voor directe of indirecte schade, ontstaan door of verband houdend met toepassing van door het Nederlands Normalisatie-instituut gepubliceerde uitgaven.

Dit document mag slechts op een stand-alone PC worden geïnstalleerd. Gebruik op een netwerk is alleen toegestaan als een aanvullende licentieovereenkomst voor netwerkgebruik met NEN is afgesloten. This document may only be used on a stand-alone PC. Use in a network is only permitted when a supplementary license agreement for us in a network with NEN has been concluded.

FORBIDDEN
Preview

Voorbeeld
Preview

INTERNATIONAL STANDARD

ISO 4649

Second edition
2002-05-01

Rubber, vulcanized or thermoplastic — Determination of abrasion resistance using a rotating cylindrical drum device

*Caoutchouc vulcanisé ou thermoplastique — Détermination de la
résistance à l'abrasion à l'aide d'un dispositif à tambour tournant*

Preview



Reference number
ISO 4649:2002(E)

© ISO 2002

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

Copyright
Preview

© ISO 2002

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.ch
Web www.iso.ch

Printed in Switzerland

Contents

	Page
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Principle	2
5 Apparatus and materials	4
6 Test pieces	5
7 Test temperature	6
8 Procedure	6
9 Expression of results	8
10 Precision and bias	9
11 Test report	10

Annexes

A Notes on a suitable abrasive sheet	12
B Standard and user-defined reference compounds	13
B.1 Purpose	13
B.2 Standard reference compound No. 1 for the calibration of the abrasive sheet and for use as a comparative standard reference compound	13
B.3 Standard reference compound No. 2 (representative of a simple tyre tread rubber) for use as a comparative standard reference compound	16

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 4649 was prepared by Technical Committee ISO/TC 45, *Rubber and rubber products*, Subcommittee SC 2, *Testing and analyses*.

This second edition cancels and replaces the first edition (ISO 4649:1985), which has been technically revised.

Annexes A and B form a normative part of this International Standard.

Rubber, vulcanized or thermoplastic — Determination of abrasion resistance using a rotating cylindrical drum device

WARNING — Persons using this International Standard should be familiar with normal laboratory practice. This standard does not purport to address all of the safety problems, if any, associated with its use. It is the responsibility of the user to establish appropriate safety and health practices and to ensure compliance with any national regulatory conditions.

1 Scope

This International Standard specifies two methods for the determination of the resistance of rubber to abrasion by means of a rotating cylindrical drum device.

The methods involve determination of the volume loss due to the abrasive action of rubbing a test piece over a specified grade of abrasive sheet. Method A is for a non-rotating test piece and method B for a rotating test piece. For each method, the result can be reported as a relative volume loss or an abrasion resistance index.

NOTE 1 Users of previous editions of this International Standard should be aware that method A and method B in this edition have been changed. In this edition, method A (non-rotating test piece) with the calculation of relative volume loss (see 3.2) corresponds to method A of the previous editions. Method A (non-rotating test piece) and method B (rotating test piece) with calculation of abrasion resistance index (see 3.3) were both included in method B in the previous editions.

Because factors such as the grade of abrasive sheet, the type of adhesive used in the manufacture of the sheet and contamination and wear caused by previous testing lead to variations in the absolute values of abrasion loss, all tests are comparative. Runs with a reference compound are included so that the results may be expressed either as a relative volume loss compared to a calibrated abrasive sheet or an abrasion resistance index compared to a reference compound.

NOTE 2 The abrasion loss is often more uniform using the rotating test piece because the whole surface of the test piece is in contact with the abrasive sheet over the duration of the test. However, there is considerable experience using the non-rotating test piece.

These test methods are suitable for comparative testing, quality control, specification compliance testing, referee purposes, and research and development work. No close relation between the results of this abrasion test and service performance can be inferred.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 471:1995, *Rubber — Temperatures, humidities and times for conditioning and testing*

ISO 2393:1994, *Rubber test mixes — Preparation, mixing and vulcanization — Equipment and procedures*

ISO 2781:1988, *Rubber, vulcanized — Determination of density*

ISO 4649:2002(E)

ISO 5725-2:1994, *Accuracy (trueness and precision) of measurement methods and results — Part 2: Basic method for the determination of repeatability and reproducibility of a standard measurement method*

ISO 7619:1997, *Rubber — Determination of indentation hardness by means of pocket hardness meters*

ISO 9298:1995, *Rubber compounding ingredients — Zinc oxide — Test methods*

3 Terms and definitions

For the purposes of this International Standard, the following terms and definitions apply.

3.1**abrasion resistance**

the resistance to wear by mechanical action upon a surface

NOTE For the purposes of this International Standard, the abrasion resistance is expressed either as a relative volume loss compared to an abrasive sheet calibrated using a standard reference compound, or as an abrasion resistance index compared to a reference compound.

3.2**relative volume loss**

the volume loss, in cubic millimetres, of the test rubber after being subjected to abrasion by an abrasive sheet which will cause a reference compound to lose a defined mass under the same specified conditions of test

NOTE A value of 200 mg has been established as the mid-point of the calibration range (see B.2.4.3) for the abrasive sheet using method A with standard reference compound No. 1 (see B.2) and considerable experience has been accumulated using the relative volume loss calculation in 9.2. A relative volume loss can be calculated for method B (rotating test piece), or with either test method with another reference compound, if the defined mass loss is known [(150 mg) has been indicated as a possible value for method B with standard reference compound No. 2 (see B.3) but its accuracy has not been documented to the degree of the value (200 mg) using method A with standard reference compound No. 1 (see B.2)].

3.3**abrasion resistance index**

the ratio of the volume loss of a reference compound to the volume loss of the test rubber measured under the same specified conditions of test and expressed as a percentage

NOTE A smaller number indicates a lower abrasion resistance.

4 Principle

A cylindrical rubber test piece is made to slide over an abrasive sheet of specified abrasive grade at a specified contact pressure over a given distance. The test piece may be non-rotating or rotating during the test.

Abrasion takes place over one of the end surfaces of the cylindrical test piece (see Figure 1). The abrasive sheet is attached to the surface of a rotating cylindrical drum against which the test piece is held and across which it is traversed.

The loss in mass of the test piece is determined and the volume loss is calculated from the density of the material used for the test piece. The volume loss of the test piece is compared to that of a reference compound tested under the same conditions.

A very important part of this method is the preparation of the abrasive sheet and its calibration using standard reference compound No. 1 (see B.2) with a non-rotating test piece.

Dimensions in millimetres

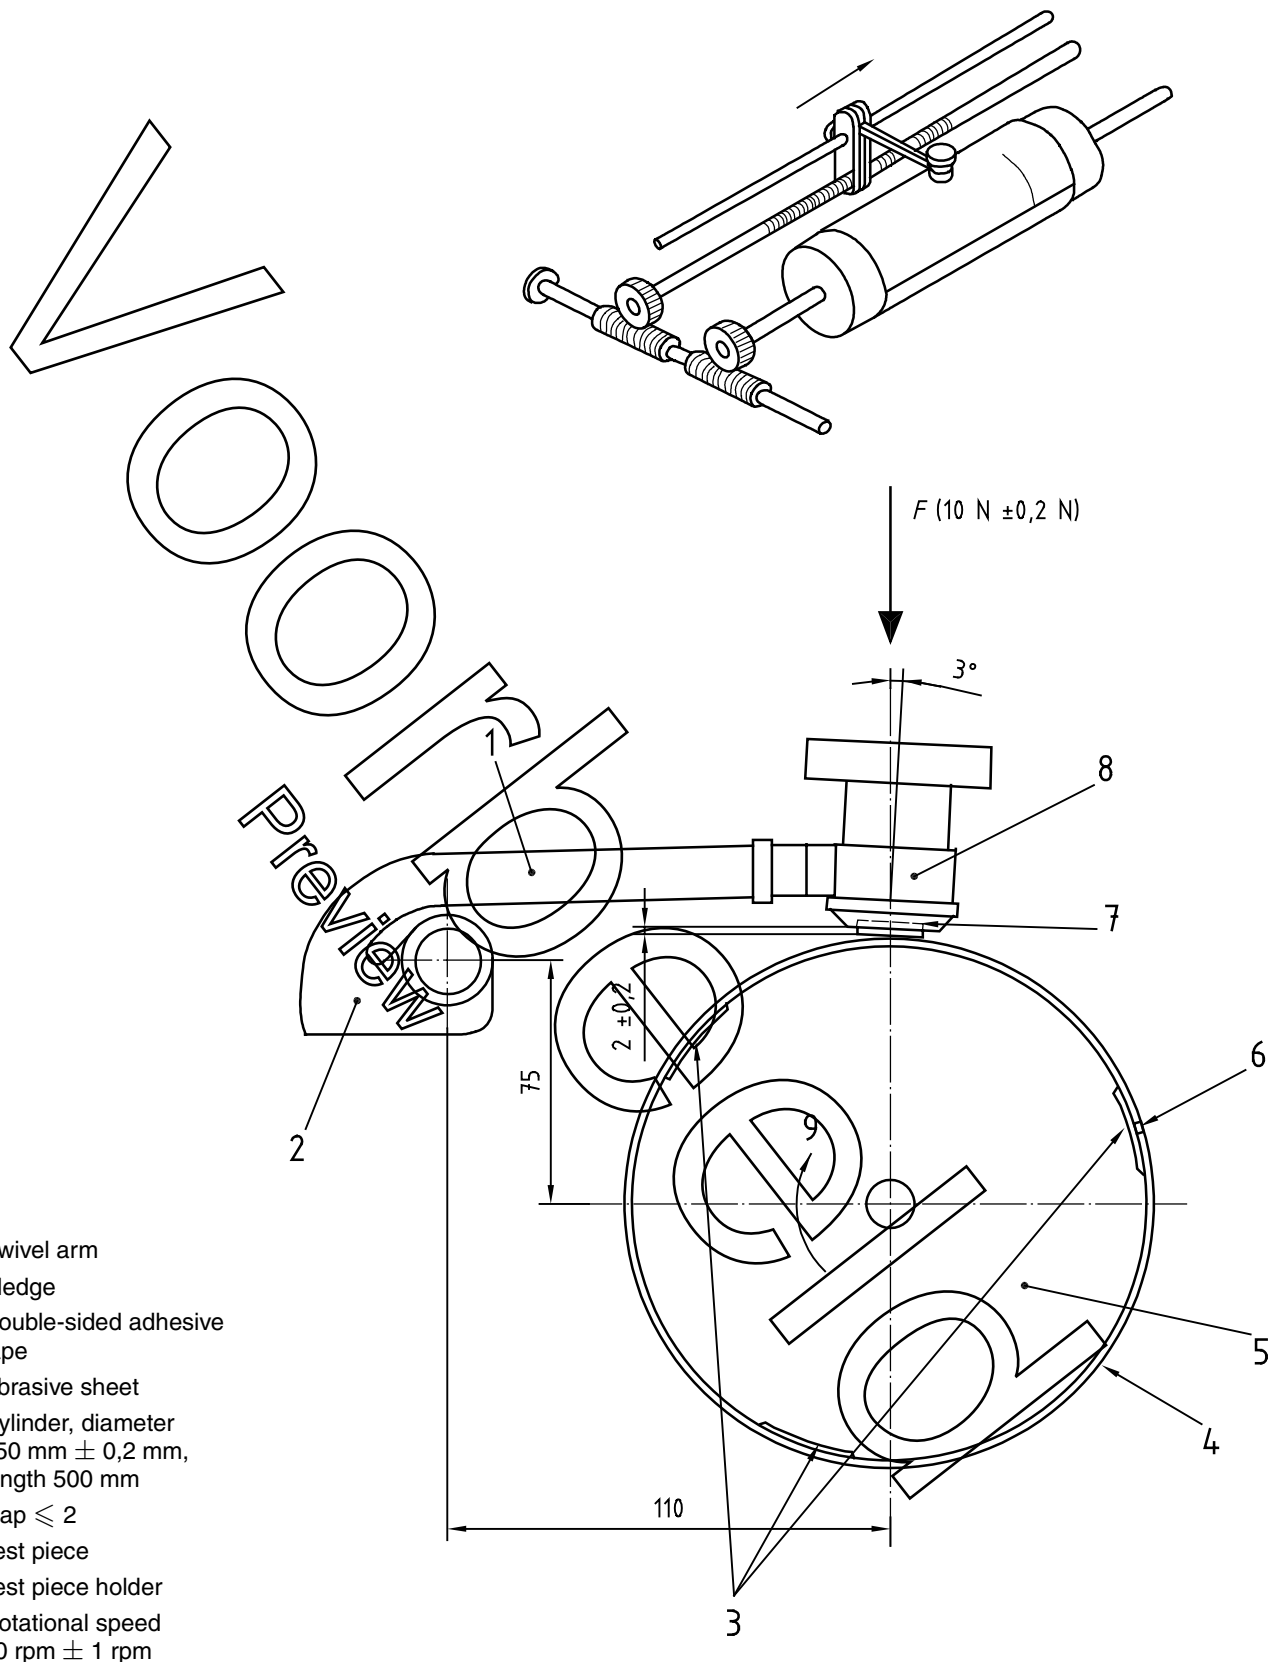


Figure 1 — Schematic illustration of apparatus

Bestelformulier

NEN

Stuur naar:

NEN Standards Products & Services
t.a.v. afdeling Klantenservice
Antwoordnummer 10214
2600 WB Delft

NEN Standards Products & Services

Postbus 5059
2600 GB Delft

Vlinderweg 6
2623 AX Delft

T (015) 2 690 390
F (015) 2 690 271

www.nen.nl/normshop

Ja, ik bestel

__ ex. NEN-ISO 4649:2002 en Rubber, ge vulcaniseerd of thermoplastisch - € 79.70
Bepaling van de slijtweerstand met gebruik van een roterende cilinder

Wilt u deze norm in PDF-formaat? Deze bestelt u eenvoudig via www.nen.nl/normshop

Gratis e-mailnieuwsbrieven

Wilt u op de hoogte blijven van de laatste ontwikkelingen op het gebied van normen, normalisatie en regelgeving? Neem dan een gratis abonnement op een van onze e-mailnieuwsbrieven. www.nen.nl/nieuwsbrieven

Retourneren

Fax: (015) 2 690 271
E-mail: klantenservice@nen.nl
Post: NEN Standards Products & Services,
t.a.v. afdeling Klantenservice
Antwoordnummer 10214,
2600 WB Delft
(geen postzegel nodig).

Gegevens

Bedrijf / Instelling

T.a.v. O M O V

E-mail

Klantnummer NEN

Uw ordernummer BTW nummer

Postbus / Adres

Postcode Plaats

Telefoon Fax

Factuuradres (indien dit afwijkt van bovenstaand adres)

Postbus / Adres

Postcode Plaats

Datum Handtekening

Voorwaarden

- De prijzen zijn geldig tot 31 december 2016, tenzij anders aangegeven.
- Alle prijzen zijn excl. btw, verzend- en handelingskosten en onder voorbehoud bij o.m. ISO- en IEC-normen.
- Bestelt u via de normshop een pdf, dan betaalt u geen handeling en verzendkosten.
- Meer informatie: telefoon (015) 2 690 391, dagelijks van 8.30 tot 17.00 uur.
- Wijzigingen en typfouten in teksten en prijsinformatie voorbehouden.
- U kunt onze algemene voorwaarden terugvinden op: www.nen.nl/leveringsvoorwaarden.