

INTERNATIONAL STANDARD

IEC 60364-4-41

Fifth edition
2005-12

GROUP SAFETY PUBLICATION

Low-voltage electrical installations –

**Part 4-41:
Protection for safety –
Protection against electric shock**

*This **English-language** version is derived from the original **bilingual** publication by leaving out all French-language pages. Missing page numbers correspond to the French-language pages.*



Reference number
IEC 60364-4-41:2005(E)

Dit document mag slechts op een stand-alone PC worden geïnstalleerd. Gebruik op een netwerk is alleen toestaan als een aanvullende licentieovereenkomst voor netwerkgebruik met NEN is afgesloten. This document may only be used on a stand-alone PC. Use in a network is only permitted when a supplementary license agreement for us in a network with NEN has been concluded.

Publication numbering

As from 1 January 1997 all IEC publications are issued with a designation in the 60000 series. For example, IEC 34-1 is now referred to as IEC 60034-1.

Consolidated editions

The IEC is now publishing consolidated versions of its publications. For example, edition numbers 1.0, 1.1 and 1.2 refer, respectively, to the base publication, the base publication incorporating amendment 1 and the base publication incorporating amendments 1 and 2.

Further information on IEC publications

The technical content of IEC publications is kept under constant review by the IEC, thus ensuring that the content reflects current technology. Information relating to this publication, including its validity, is available in the IEC Catalogue of publications (see below) in addition to new editions, amendments and corrigenda. Information on the subjects under consideration and work in progress undertaken by the technical committee which has prepared this publication, as well as the list of publications issued, is also available from the following:

- IEC Web Site (www.iec.ch)

- Catalogue of IEC publications

The on-line catalogue on the IEC web site (www.iec.ch/searchpub) enables you to search by a variety of criteria including text searches, technical committees and date of publication. On-line information is also available on recently issued publications, withdrawn and replaced publications, as well as corrigenda.

- IEC Just Published

This summary of recently issued publications (www.iec.ch/online_news/justpub) is also available by email. Please contact the Customer Service Centre (see below) for further information.

- Customer Service Centre

If you have any questions regarding this publication or need further assistance, please contact the Customer Service Centre:

Email: custserv@iec.ch
Tel: +41 22 919 02 11
Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

IEC
60364-4-41

Fifth edition
2005-12

GROUP SAFETY PUBLICATION

Low-voltage electrical installations –
Part 4-41:
Protection for safety –
Protection against electric shock

Preview

© IEC 2005 Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission, 3, rue de Varembé, PO Box 131, CH-1211 Geneva 20, Switzerland
Telephone: +41 22 919 02 11 Telefax: +41 22 919 03 00 E-mail: inmail@iec.ch Web: www.iec.ch



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE

V

For price, see current catalogue

CONTENTS

FOREWORD.....	5
410 Introduction	9
410.1 Scope	11
410.2 Normative references	11
410.3 General requirements	13
411 Protective measure: automatic disconnection of supply	15
411.1 General	15
411.2 Requirements for basic protection	17
411.3 Requirements for fault protection	17
411.4 TN systems	21
411.5 TT systems	23
411.6 IT systems	25
411.7 Functional extra-low voltage (FELV)	29
412 Protective measure: double or reinforced insulation.....	31
412.1 General.....	31
412.2 Requirements for basic protection and fault protection (protection against indirect contact)	33
413 Protective measure: electrical separation	37
413.1 General	37
413.2 Requirements for basic protection	37
413.3 Requirements for fault protection	37
414 Protective measure: extra-low-voltage provided by SELV and PELV	39
414.1 General	39
414.2 Requirements for basic protection and fault protection	39
414.3 Sources for SELV and PELV.....	41
414.4 Requirements for SELV and PELV circuits	41
415 Additional protection.....	43
415.1 Additional protection: residual current protective devices (RCDs)	45
415.2 Additional protection: supplementary protective equipotential bonding.....	45
Annex A (normative) Provisions for basic protection (protection against direct contact)	47
Annex B (normative) Obstacles and placing out of reach	51
Annex C (normative) Protective measures for application only when the installation is controlled or under the supervision of skilled or instructed persons.....	55
Annex D (informative) Correspondence between IEC 60364-4-41(2001) and the present standard.....	61
Bibliography.....	65
Figure B.1 – Zone of arm's reach.....	53
Table 41.1 – Maximum disconnection times	19
Table D.1 – Correspondence between IEC 60364-4-41:2001 and the present standard	61

INTERNATIONAL ELECTROTECHNICAL COMMISSION

LOW-VOLTAGE ELECTRICAL INSTALLATIONS –

**Part 4-41: Protection for safety –
Protection against electric shock**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60364-4-41 has been prepared by IEC technical committee 64: Electrical installations and protection against electric shock.


This fifth edition cancels and replaces the fourth edition, published in 2001, and constitutes a technical revision.

The main changes with respect to the previous edition are listed below:

- adoption of IEC 61140 terminology;
- layout rationalized on basis of complete protective measures (i.e. appropriate practical combinations of protective provision in normal service (direct contact protection) and protective provision in case of a fault (indirect contact protection);

- requirements of 471 and 481, which were included in the fourth edition have been rationalized
- disconnection requirements for TT systems clarified;
- IT systems considered more fully;
- requirements in certain cases for additional protection of socket-outlets by means of a 30 mA RCD, where the protective measure is automatic disconnection of supply.

The text of this standard is based on the following documents:

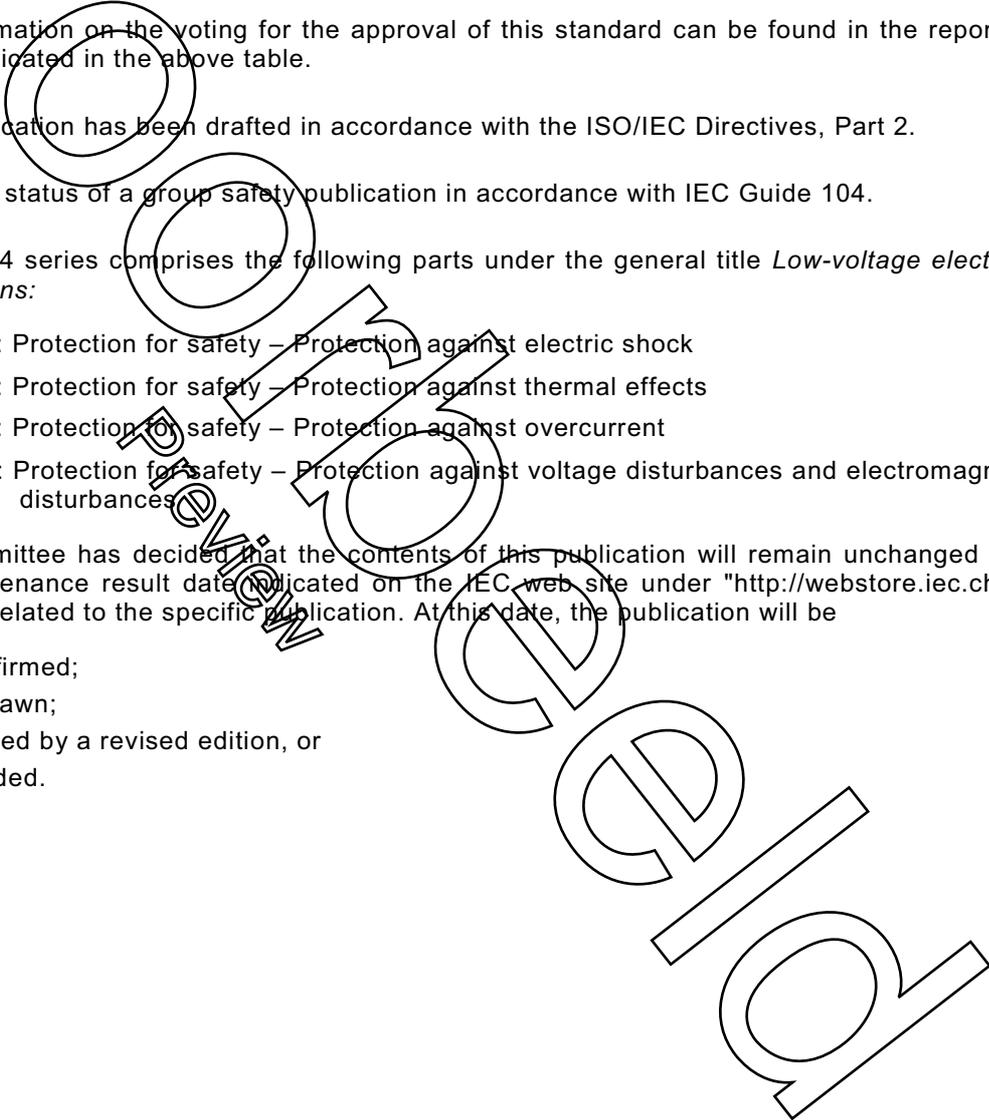

FDIS	Report on voting
64/1489/FDIS	64/1500/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

It has the status of a group safety publication in accordance with IEC Guide 104.

The Part 4 series comprises the following parts under the general title *Low-voltage electrical installations*:

Part 4-41: Protection for safety – Protection against electric shock

Part 4-42: Protection for safety – Protection against thermal effects

Part 4-43: Protection for safety – Protection against overcurrent

Part 4-44: Protection for safety – Protection against voltage disturbances and electromagnetic disturbances

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

410 Introduction

This Part 4-41 of IEC 60364 deals with protection against electric shock as applied to electrical installations. It is based on IEC 61140 which is a basic safety standard that applies to the protection of persons and livestock. IEC 61140 is intended to give fundamental principles and requirements that are common to electrical installations and equipment or are necessary for their co-ordination.

The fundamental rule of protection against electric shock, according to IEC 61140, is that hazardous-live-parts must not be accessible and accessible conductive parts must not be hazardous live, neither under normal conditions nor under single fault conditions.

According to 4.2 of IEC 61140, protection under normal conditions is provided by basic protective provisions and protection under single fault conditions is provided by fault protective provisions. Alternatively, protection against electric shock is provided by an enhanced protective provision, which provides protection under normal conditions and under single fault conditions.

This standard has the status of a group safety publication (GSP) for protection against electric shock.

In the fourth edition of IEC 60364 (2001):

- protection under normal conditions (now designated basic protection) was referred to as protection against direct contact and
- protection under fault conditions (now designated fault protection) was referred to as protection against indirect contact.

LOW-VOLTAGE ELECTRICAL INSTALLATIONS –

Part 4-41: Protection for safety – Protection against electric shock

410.1 Scope

Part 4-41 of IEC 60364 specifies essential requirements regarding protection against electric shock, including basic protection (protection against direct contact) and fault protection (protection against indirect contact) of persons and livestock. It deals also with the application and co-ordination of these requirements in relation to external influences.

Requirements are also given for the application of additional protection in certain cases.

410.2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60364-5-52, *Electrical installations of buildings – Part 5-52: Selection and erection of electrical equipment – Wiring systems* ¹⁾

IEC 60364-5-54, *Electrical installations of buildings – Part 5-54: Selection and erection of electrical equipment – Earthing arrangements, protective conductors and protective bonding conductors*

IEC 60364-6, *Low-voltage electrical installations – Part 6: Verification* ²⁾

IEC 60439-1, *Low-voltage switchgear and controlgear assemblies – Part 1: Type-tested and partially type-tested assemblies*

IEC 60449, *Voltage bands for electrical installations of buildings*

IEC 60614 (all parts), *Conduits for electrical installations – Specification*

IEC 61084 (all parts), *Cable trunking and ducting systems for electrical installations*

IEC 61140, *Protection against electric shock – Common aspects for installation and equipment*

IEC 61386 (all parts), *Conduit systems for electrical installations*

IEC 61558-2-6, *Safety of power transformers, power supply units and similar – Part 2-6: Particular requirements for safety isolating transformers for general use*

IEC Guide 104, *The preparation of safety publications and the use of basic safety publications and group safety publications*

1) A new edition is currently under consideration.

2) To be published.

410.3 General requirements

410.3.1 In this standard the following specification of voltages is intended unless otherwise stated:

- a.c. voltages are r.m.s.;
- d.c. voltages are ripple-free.

Ripple-free is conventionally defined as an r.m.s. ripple voltage of not more than 10 % of the d.c. component.

410.3.2 A protective measure shall consist of

- an appropriate combination of a provision for basic protection and an independent provision for fault protection, or
- an enhanced protective provision which provides both basic protection and fault protection.

Additional protection is specified as part of a protective measure under certain conditions of external influences and in certain special locations (see the corresponding Part 7 of IEC 60364).

NOTE 1 For special applications, protective measures which do not follow this concept are permitted (see 410.3.5 and 410.3.6).

NOTE 2 An example of an enhanced protective measure is reinforced insulation.

410.3.3 In each part of an installation one or more protective measures shall be applied, taking account of the conditions of external influence.

The following protective measures generally are permitted:

- automatic disconnection of supply (Clause 411),
- double or reinforced insulation (Clause 412),
- electrical separation for the supply of one item of current-using equipment (Clause 413),
- extra-low-voltage (SELV and PELV) (Clause 414).

The protective measures applied in the installation shall be considered in the selection and erection of equipment.

For particular installations see 410.3.4 to 410.3.9.

NOTE In electrical installations the most commonly used protective measure is automatic disconnection of supply.

410.3.4 For special installations or locations, the particular protective measures in the corresponding Part 7 of IEC 60364 shall be applied.

410.3.5 The protective measures, specified in Annex B, i.e. the use of obstacles and placing out of reach, shall only be used in installations accessible to

- skilled or instructed persons, or
- persons under the supervision of skilled or instructed persons.

Bestelformulier

Stuur naar:

NEN Standards Products & Services
t.a.v. afdeling Klantenservice
Antwoordnummer 10214
2600 WB Delft



NEN Standards Products & Services

Postbus 5059
2600 GB Delft

Vlinderweg 6
2623 AX Delft

T (015) 2 690 390
F (015) 2 690 271

www.nen.nl/normshop

Ja, ik bestel

__ ex. IEC 60364-4-41:2005 en;fr Elektrische laagspanningsinstallaties - Deel 4-41: Beschermingsmaatregelen - Bescherming tegen elektrische schok € 167.84

Wilt u deze norm in PDF-formaat? Deze bestelt u eenvoudig via www.nen.nl/normshop

Gratis e-mailnieuwsbrieven

Wilt u op de hoogte blijven van de laatste ontwikkelingen op het gebied van normen, normalisatie en regelgeving? Neem dan een gratis abonnement op een van onze e-mailnieuwsbrieven. www.nen.nl/nieuwsbrieven

Gegevens

Bedrijf / Instelling

T.a.v. O M O V

E-mail

Klantnummer NEN

Uw ordernummer BTW nummer

Postbus / Adres

Postcode Plaats

Telefoon Fax

Factuuradres (indien dit afwijkt van bovenstaand adres)

Postbus / Adres

Postcode Plaats

Datum Handtekening

Retourneren

Fax: 015 2 690 271

E-mail: klantenservice@nen.nl

Post: NEN Standards Products & Services,

t.a.v. afdeling Klantenservice
Antwoordnummer 10214,
2600 WB Delft

(geen postzegel nodig).

Voorwaarden

- De prijzen zijn geldig tot 31 december 2018, tenzij anders aangegeven.
- Alle prijzen zijn excl. btw, verzend- en handelingskosten en onder voorbehoud bij o.m. ISO- en IEC-normen.
- Bestelt u via de normshop een pdf, dan betaalt u geen handeling en verzendkosten.
- Meer informatie: telefoon 015 2 690 391, dagelijks van 8.30 tot 17.00 uur.
- Wijzigingen en typfouten in teksten en prijsinformatie voorbehouden.
- U kunt onze algemene voorwaarden terugvinden op: www.nen.nl/leveringsvoorwaarden.